



- ダーリントン・トランジスタ2個直列接続
- フリーホイール・ダイオード付
- 絶縁形
- 直流電流増幅率は70以上(定格電流にて)

■等価回路

C1



C3






注1. 1トランジスタ当り。

注2. AC, 1分間。


注3. #印は V_{CE0} (I_c の単位はmA)。

型 名	最 大 定 格											電 氣 的 特 性									
	V _{CE0} (V)	V _{CE0 (SUS)} V _{CE0} # (V)	V _{RE0} (V)	I _c (A)	I _{CP} (1ms) (A)	I _B (A)	I _F (A)	P _c		T _j (℃)	T _{stg} (℃)	V _{DS} (V)	I _{CBO}		I _{RE0}		V _{CE0 (SUS)}		h _{FE}		
								(注1) (W)	Total (W)				最大 (mA)	V _{CB} (V)	最大 (mA)	V _{EB} (V)	V _{CE0 (注3)} (V)	I _c (A)	最小 (V)	V _{CE} (V)	I _c (A)
2D175M-050	600	450	10	75	150	4.5	75	350	700	150	-40~125	2500	1.0	600	200	10	450	1.0	750	2.5	75
2D175Z-100	1000	1000 #	10	75	150	4.0	75	500	1000	150	-40~125	2500	1.0	1000	200	10	1000 #	1	100	5	75
2D175Z-120	1200	1200 #	10	75	150	4.0	75	500	1000	150	-40~125	2500	1.0	1200	200	10	1200 #	1	100	5	75
2D1100A-120	1200	1200 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1200	200	10	1200 #	1	70	5	100
2D1100A-140	1400	1400 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1200	200	10	1400 #	20	70	5	100
2D1100D-050	600	450	7	100	200	6.0	100	620	1240	150	-40~125	2500	1.0	600	400	7	450	1.0	100	5	100
2D1100D-100	1000	800	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	100
2D1100M-050	600	450	10	100	200	6.0	100	620	1240	150	-40~125	2500	1.0	600	400	10	450	1.0	1000	2.5	100
2D1100Z-100	1000	1000 #	10	100	200	5.0	100	800	1600	150	-40~125	2500	2.0	1000	400	10	1000 #	2	100	5	100
2D1100Z-120	1200	1200 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	2.0	1200	400	10	1200 #	2	100	5	100
2D1150A-120	1200	1200 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1200	200	10	1200 #	1	70	5	150
2D1150A-140	1400	1400 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1200	200	10	1400 #	20	70	5	150
2D1150D-050	600	450	7	150	300	9.0	150	690	1380	150	-40~125	2500	1.0	600	400	7	450	1.0	100	5	150
2D1150D-100	1000	800	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	150
2D1150M-050	600	450	10	150	300	9.0	150	690	1380	150	-40~125	2500	1.0	600	400	10	450	1.0	1500	2.5	150
2D1150Z-100	1000	1000 #	10	150	300	4.0	150	1000	2000	150	-40~125	2500	2.0	1000	400	10	1000 #	2	100	5	150
2D1150Z-120	1200	1200 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	2.0	1200	400	10	1200 #	2	100	5	150
2D1200A-050	600	450	10	200	400	10	200	900	1800	150	-40~125	2500	2.0	600	600	10	450	2.0	80	5	200
2D1200D-100	1000	800	10	200	400	8.0	200	1200	2400	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	200
2D1240A-055	600	550	6	240	480	10	240	1000	2000	150	-40~125	2500	2.0	600	600	6	550	2.0	70	5	240




(T _i = 25℃)										エミッタ・コレクタ間ダイオード						熱抵抗		等 価 回 路	外形図	記	事	型	名
飽和電圧 (V)		I _C (A)	I _B (A)	スイッチング時間 (μs)			I _{B1} (A)	I _{B2} (A)	I _C (A)	V _F (V)		t _{rr} (μs)	I _F (A)	V _{BE} (V)	di/dt (A/μs)	R _{th(j-c)} (℃/W)							
V _{CE}	V _{BE}			t _{on}	t _{off}	t _f				最大	I _F					最大	最大						
2.5	3.0	75	0.1	3.0	8	3.0	0.1	-1.5	75	1.8	75	0.6	75	-6	150	0.35	0.85	E 6	M 2 0 8			2D175M-050	
2.8	3.5	75	1.0	2.5	12	2.0	1.0	-1.5	75	1.8	75	0.7	75	-6	75	0.25	1.2	E 4	M 2 0 9			2D175Z-100	
2.8	3.5	75	1.0	3.0	15	2.0	1.0	-1.5	75	2.0	75	0.8	75	-6	75	0.25	1.2	E 4	M 2 0 9			2D175Z-120	
2.5	3.5	100	3.0	3.0	15	3.0	3.0	-9.0	100	2.0	100	0.6	100	-6	100	0.15	0.45	E 2	M 2 0 7	UL : E 8 2 9 8 8 (M)		2D1100A-120	
2.5	3.5	100	3.0	3.0	15	3.0	3.0	-9.0	100	2.0	100	0.6	100	-6	100	0.15	0.45	E 2	M 2 0 7			2D1100A-140	
2.0	2.5	100	2.0	3.0	12	4.0	2.0	-2.0	100	1.5	100	0.6	100	-6	100	0.2	1.6	C 3	M 2 0 5			2D1100D-050	
2.5	3.5	100	2.0	2.5	15	3.0	2.0	-6.0	100	1.8	100	0.5	100	-6	100	0.15	0.45	E 2	M 2 0 7			2D1100D-100	
2.5	3.0	100	0.1	3.0	8	3.0	0.1	-2.0	100	1.8	100	0.6	100	-6	200	0.2	0.8	E 6	M 2 0 5			2D1100M-050	
2.8	3.5	100	1.4	3.0	15	2.0	1.4	-2.0	100	2.0	100	0.8	100	-6	100	0.156	0.65	E 5	M 2 1 0			2D1100Z-100	
2.8	3.5	100	1.4	3.0	15	2.0	1.4	-2.0	100	2.0	100	0.8	100	-6	100	0.156	0.65	E 5	M 2 1 0			2D1100Z-120	
2.5	3.5	150	4.0	3.5	15	3.0	4.0	-12	150	2.0	150	0.6	150	-6	150	0.125	0.31	E 2	M 2 0 7	UL : E 8 2 9 8 8 (M)		2D1150A-120	
2.5	3.5	150	4.0	3.0	15	3.0	4.0	-12	150	2.0	150	0.6	150	-6	150	0.125	0.31	E 2	M 2 0 7			2D1150A-140	
2.0	2.5	150	3.0	3.0	12	4.0	3.0	-3.0	150	1.5	150	0.6	150	-6	150	0.18	0.6	C 3	M 2 0 5			2D1150D-050	
2.5	3.5	150	3.0	2.5	15	3.0	3.0	-9.0	150	1.8	150	0.5	150	-6	150	0.125	0.31	E 2	M 2 0 7			2D1150D-100	
2.5	3.0	150	0.1	3.0	8	3.0	0.1	-3.0	150	1.8	150	0.6	150	-6	300	0.18	0.60	E 7	M 2 0 5			2D1150M-050	
2.8	3.5	150	2.0	2.5	12	2.0	2.0	-3.0	150	1.8	150	0.7	150	-6	150	0.125	0.60	E 5	M 2 1 0			2D1150Z-100	
2.8	3.5	150	2.0	3.0	15	2.0	2.0	-3.0	150	2.0	150	0.8	150	-6	150	0.125	0.60	E 5	M 2 1 0			2D1150Z-120	
2.0	2.5	200	5.0	2.0	12	3.0	5.0	-5.0	200	1.8	200	0.6	200	-6	200	0.14	0.45	C 5	M 2 0 7			2D1200A-050	
2.5	3.5	200	4.0	2.5	15	3.0	4.0	-12	200	1.8	200	0.5	200	-6	200	0.1	0.31	E 2	M 2 0 7			2D1200D-100	
2.0	2.5	240	7.0	2.0	12	3.0	7.0	-7.0	240	1.5	240	0.6	240	-6	240	0.125	0.3	C 3	M 2 0 7			2D1240A-055	


FD-1

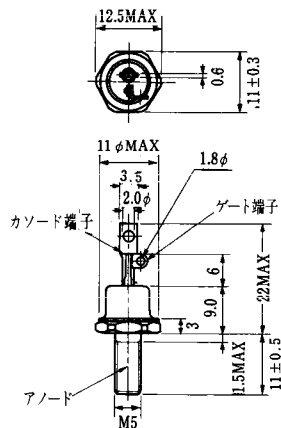


FD-2

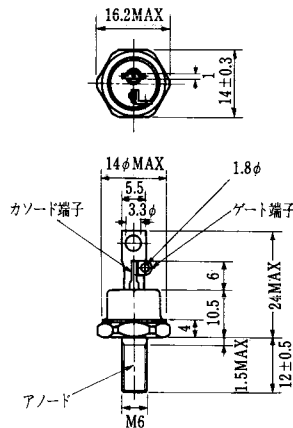


FD-3

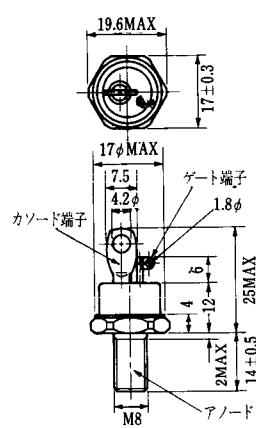


FD-4

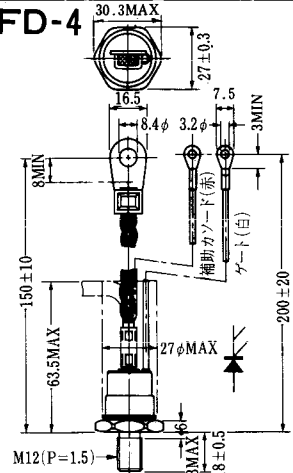


FD-5

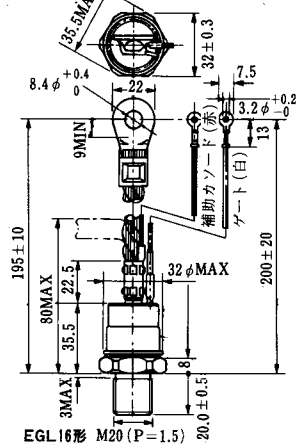


FD-6

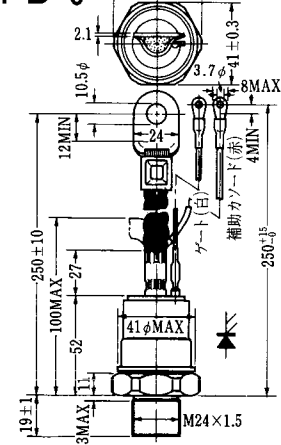


FD-7

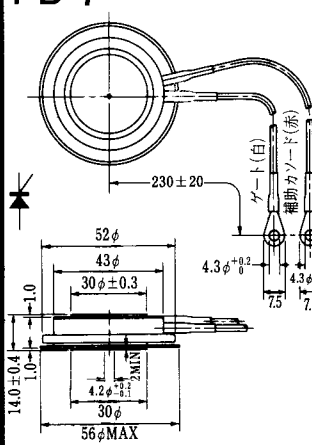


FD-8

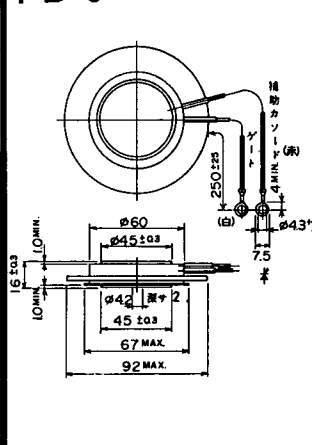

FD-9

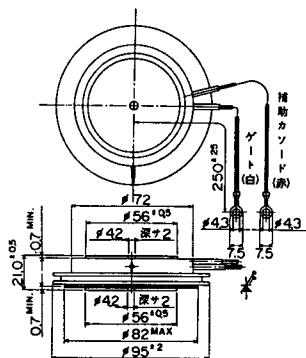


FD-10

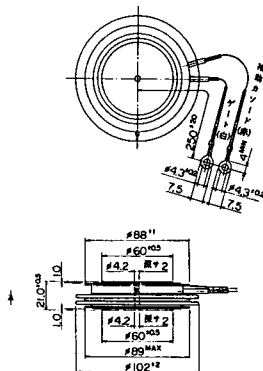


FD-11

FD-12


H-1

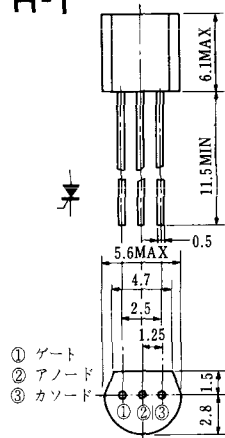


H-2

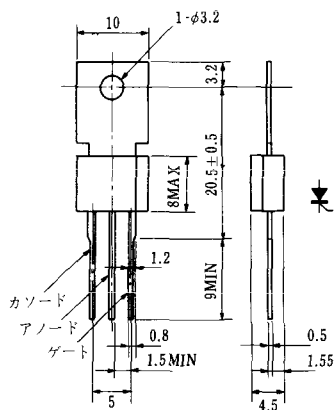


H-3




H-4

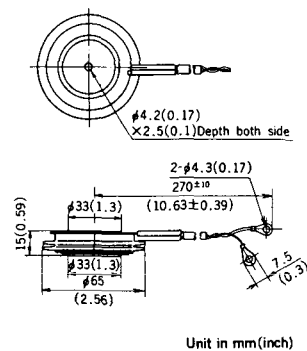


H-5




H-6

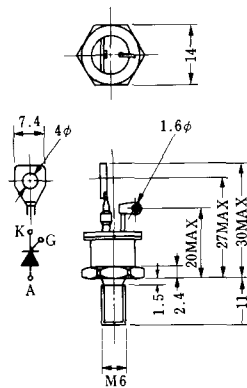


H-7

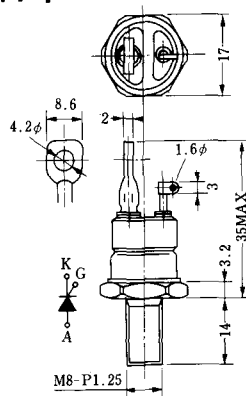


H-8A




H-8B




H-17

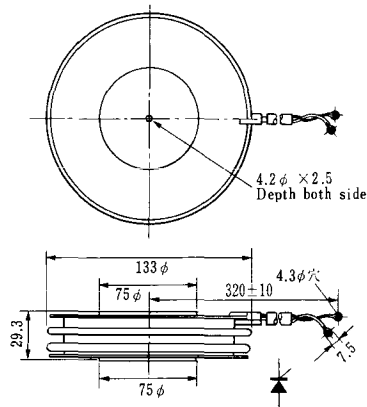


H-18




H-19

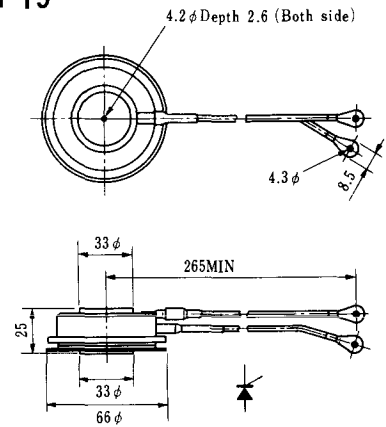


H-20

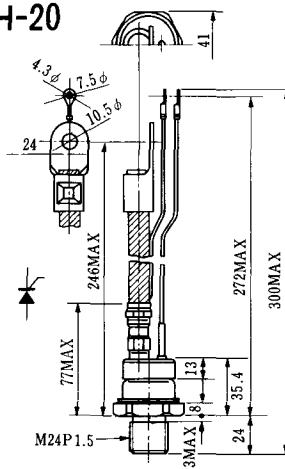


H-21

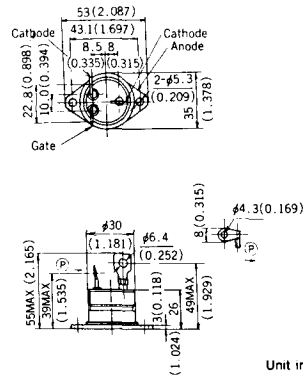


H-22

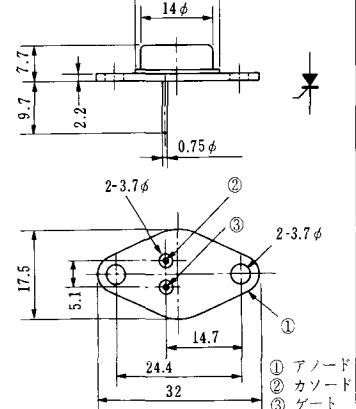


H-23

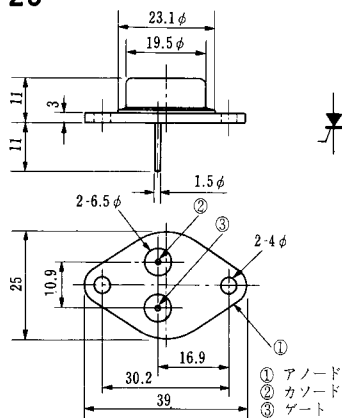


H-24

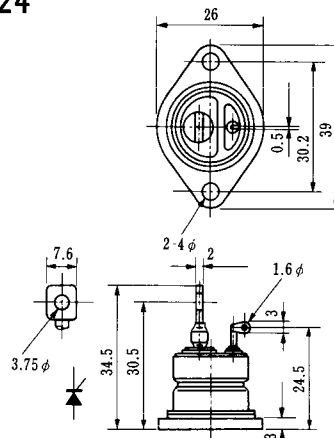

H-25

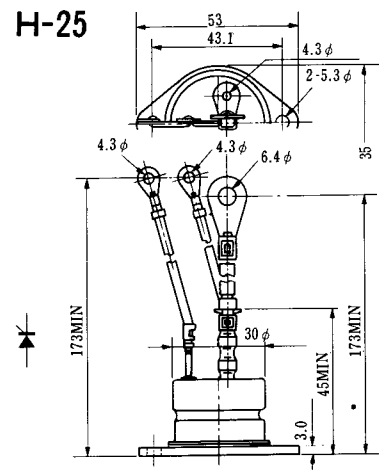


H-26

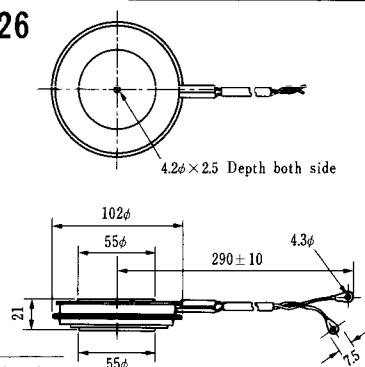


Type	Direction of polarity
CA12	

H-27




Type	Direction of polarity
CF11V	

H-28

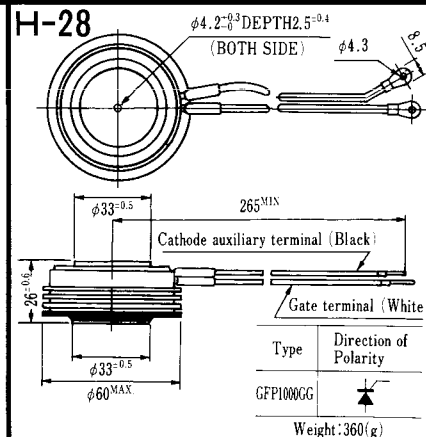


Note: The thickness is a dimension in press at the rated mounting force.

H-29

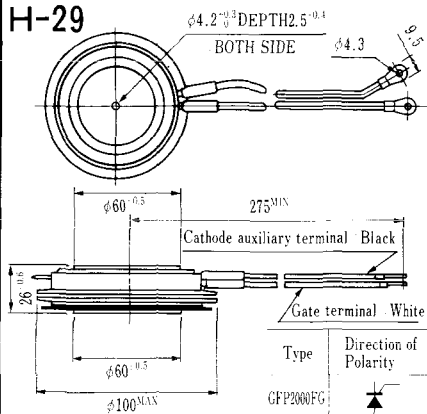


Note : The thickness is a dimension in press at the rated mounting force. Weight: 870(g)

H-30

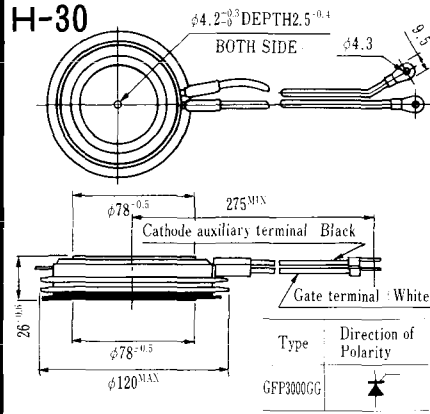



Note : The thickness is a dimension in press at the rated mounting force. Weight: 1,460(g)

HT-1

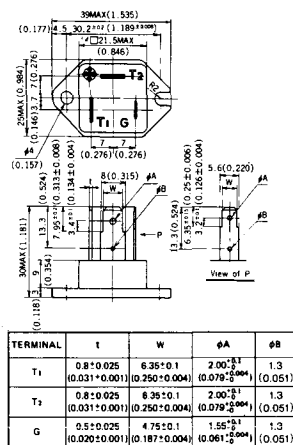


Unit in mm (inch)


HT-2

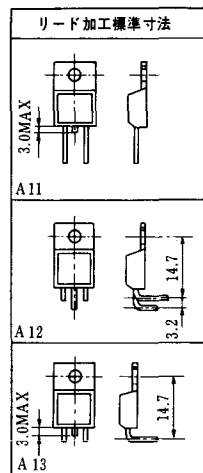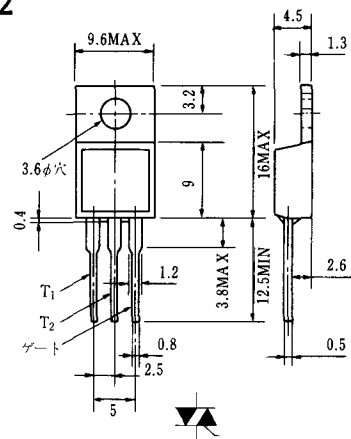


HT-3

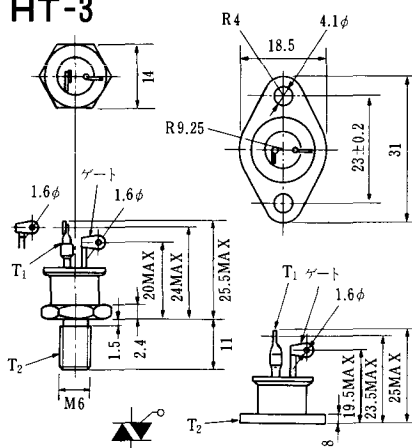

HT-4

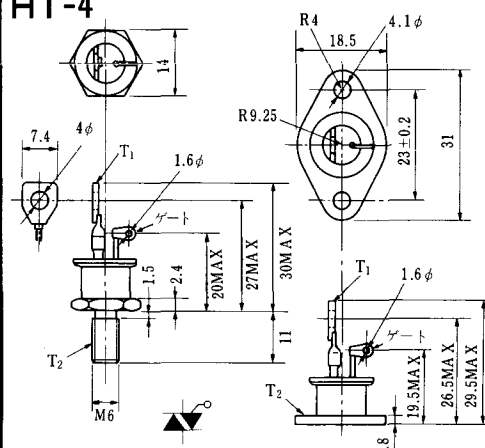


HT-5

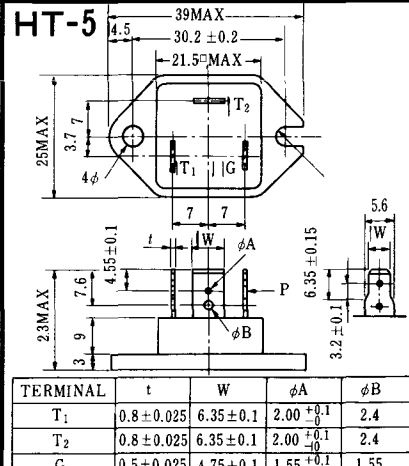


《寸法図単位：mm》


M-1

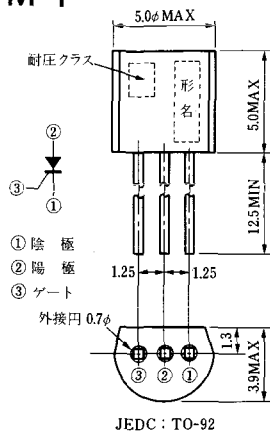


M-2

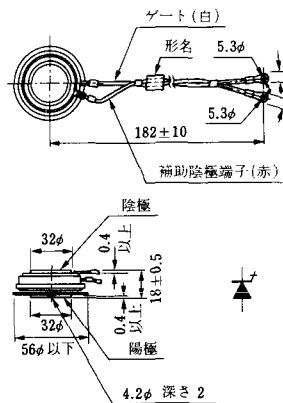


M-3

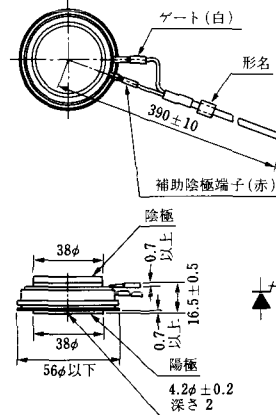


M-4

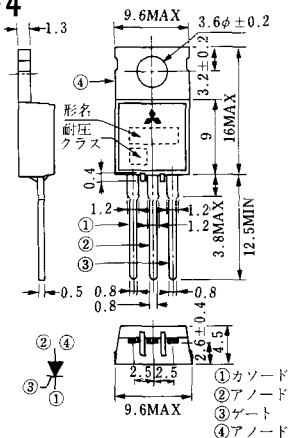


M-5

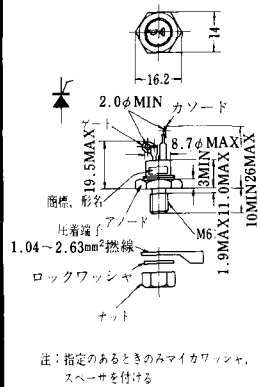


M-6

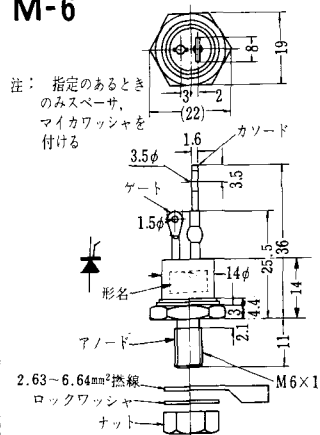


M-7

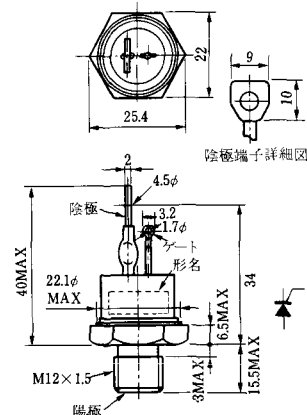


M-8

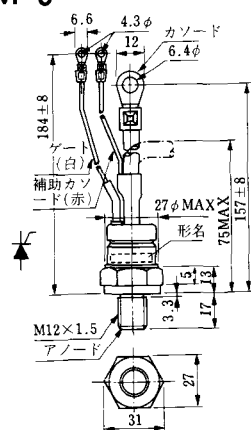


M-9

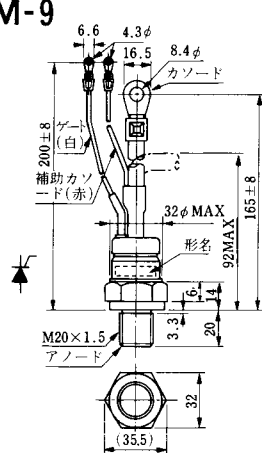


M-10

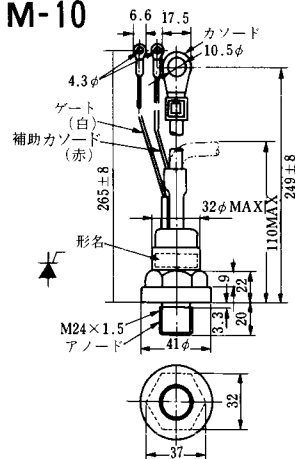


M-11

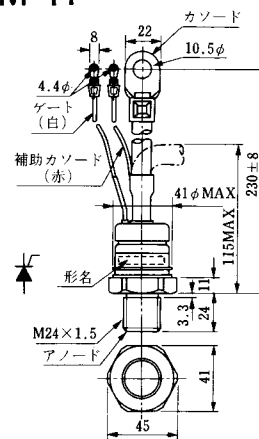


M-12

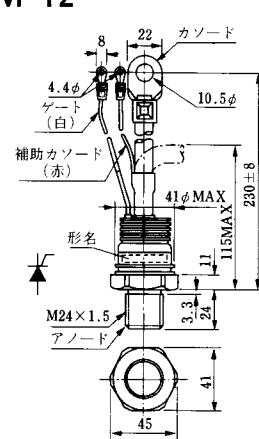


M-13

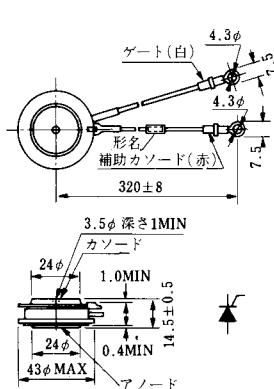


M-14

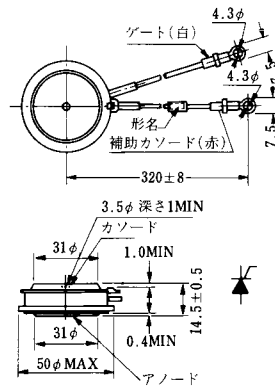


M-15

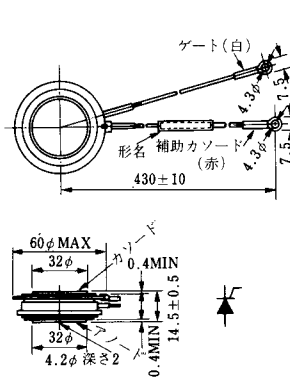


M-16

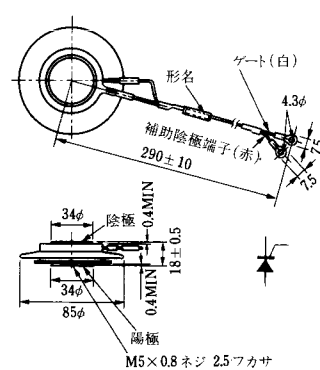


M-17

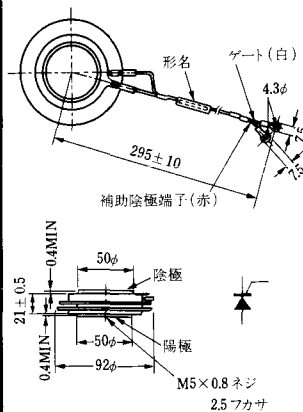


M-18

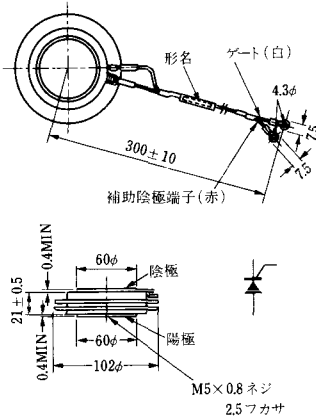


M-19

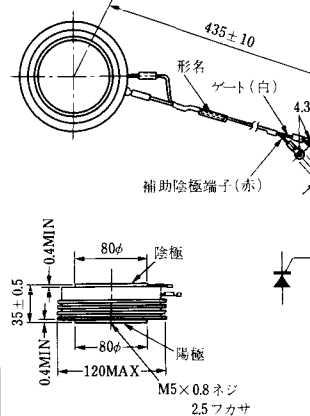


M-20

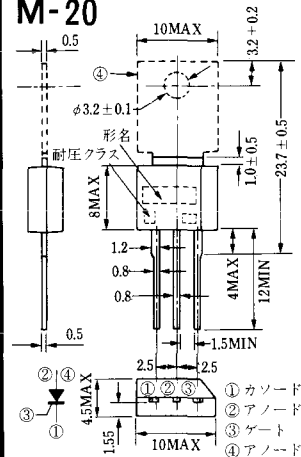


M-21

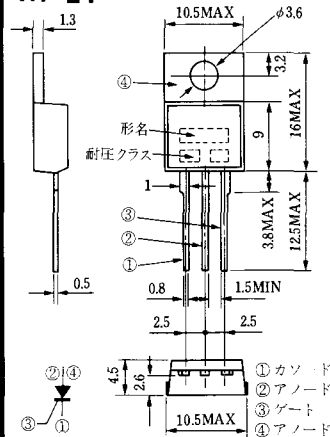


M-22

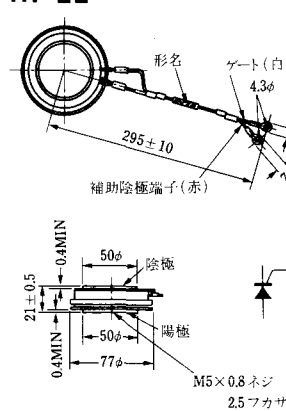


M-23

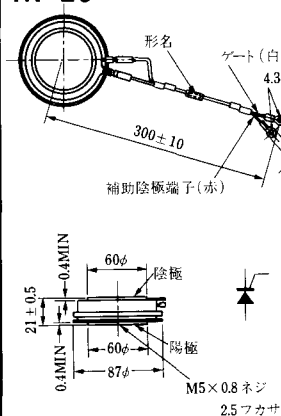


M-24

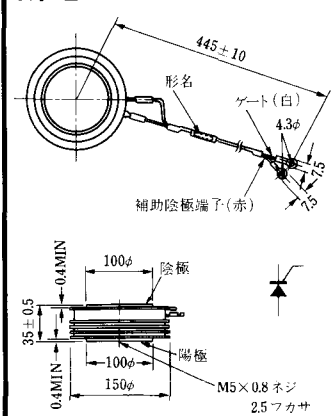


M-25

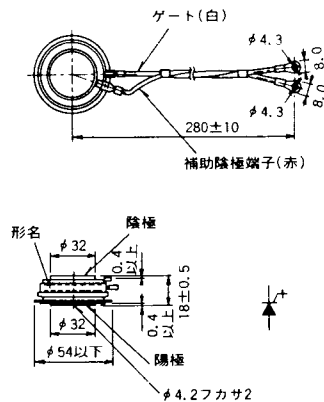


M-26

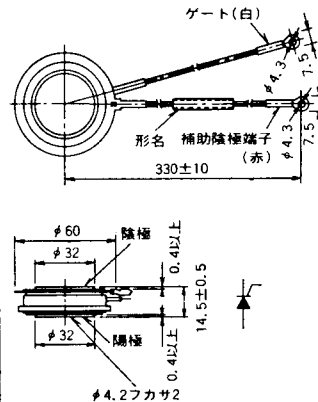


M-27

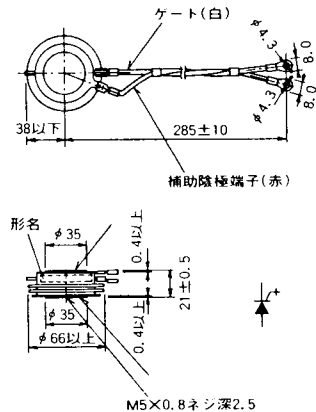


M-28

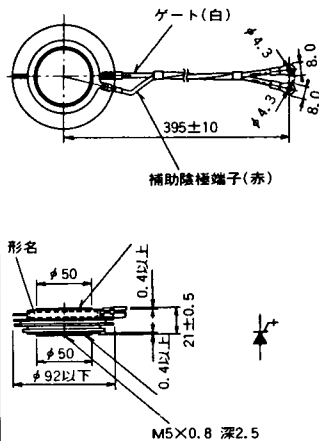


M-29

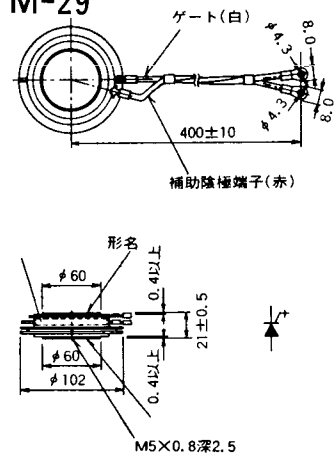


M-30

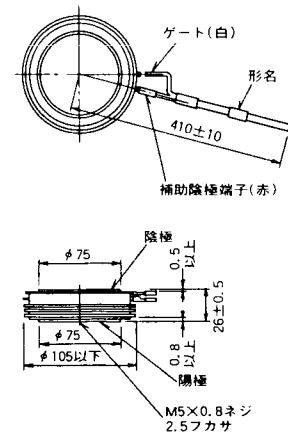


M-31

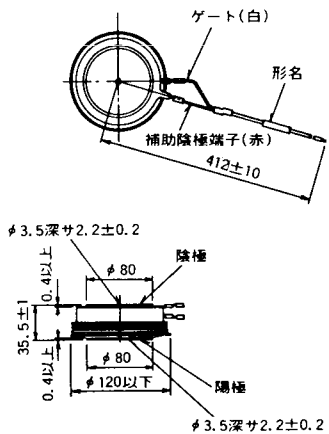


M-32

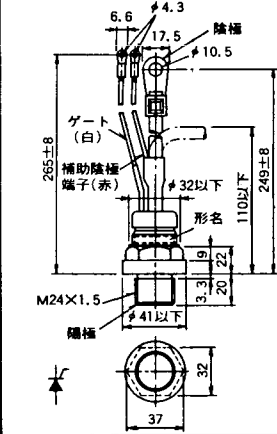


M-33

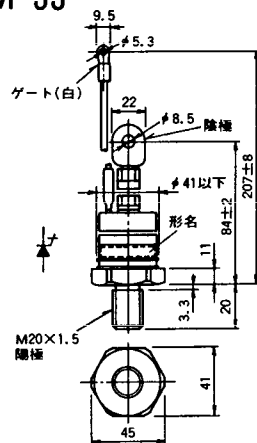


M-34

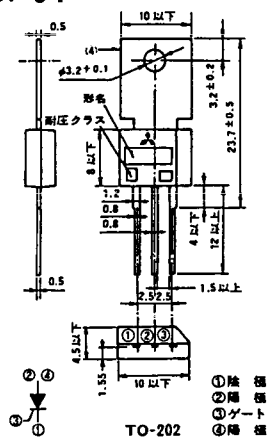


MT-1

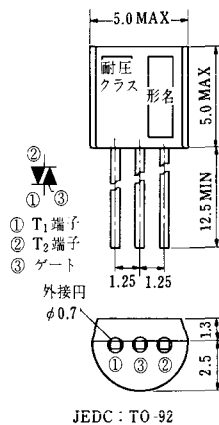


MT-2

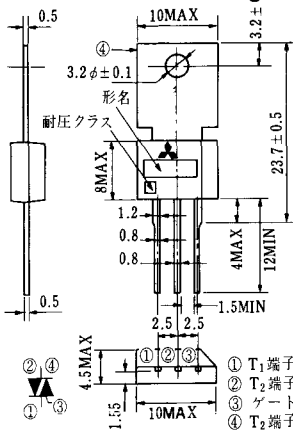


MT-3

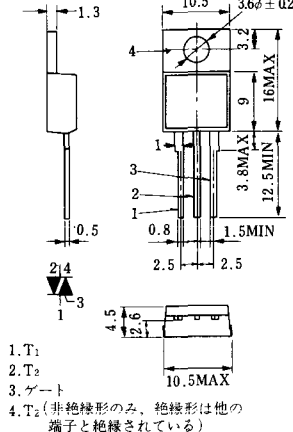


MT-4

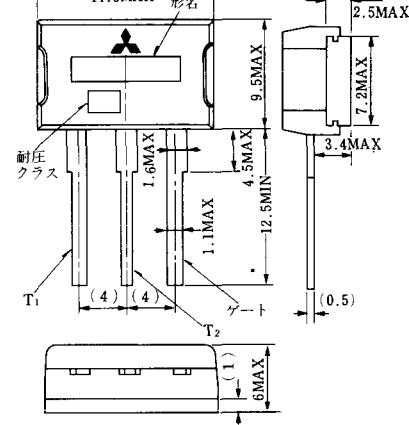


MT-5

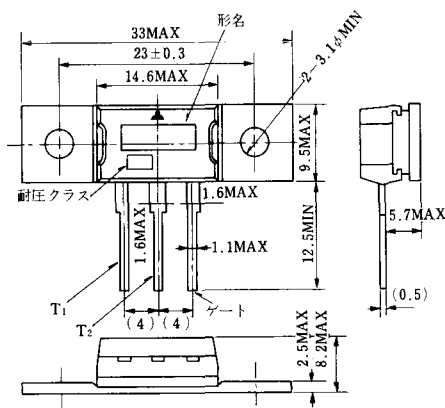


MT-6

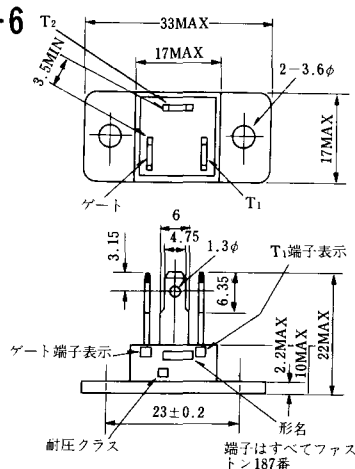


MT-7

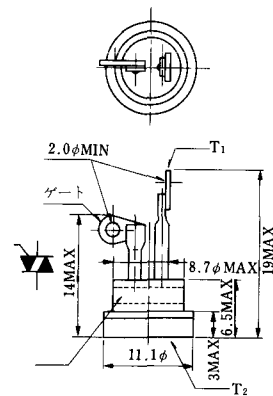


MT-8

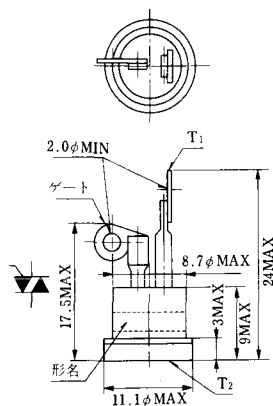


MT-9

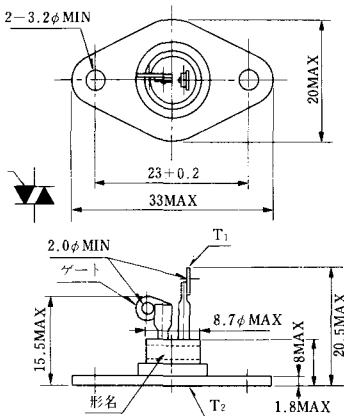


MT-10

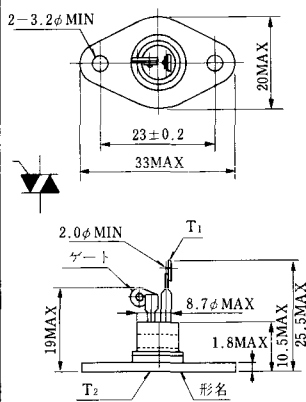


MT-11

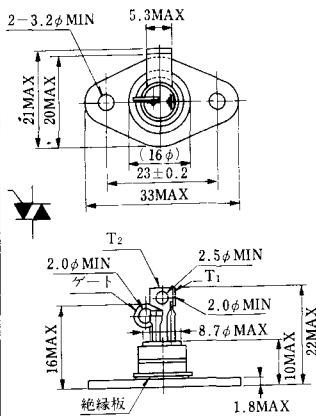


MT-12

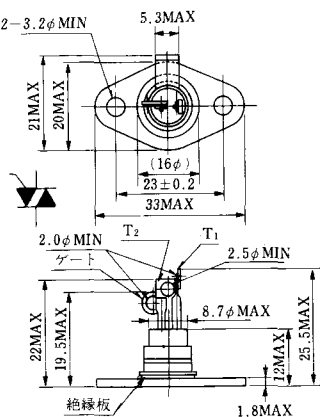


MT-13

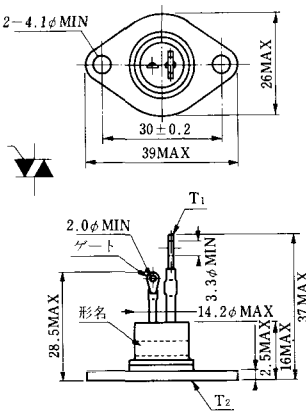


MT-14

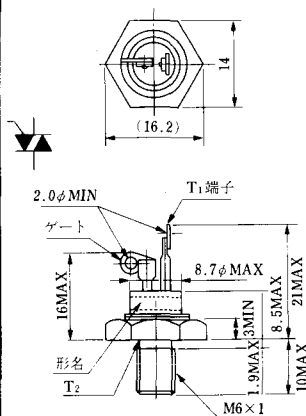


MT-15

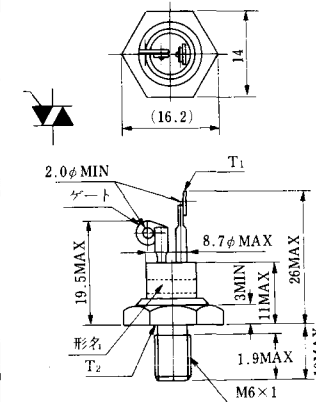


MT-16

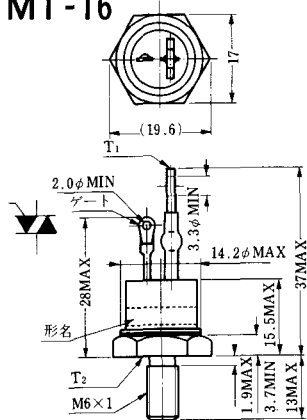


MT-17

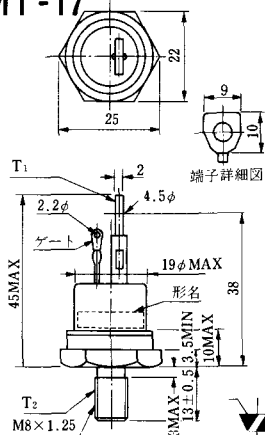


MT-18

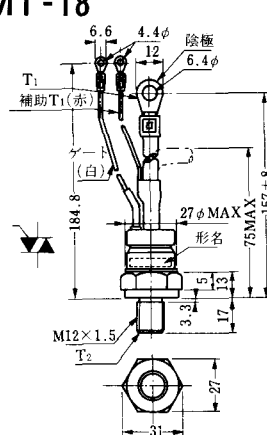


MT-19

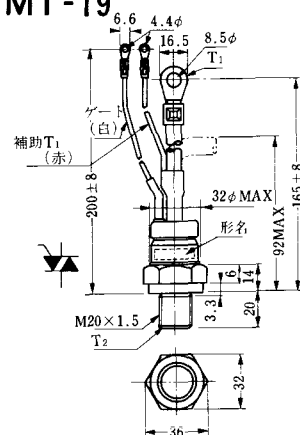


MT-20

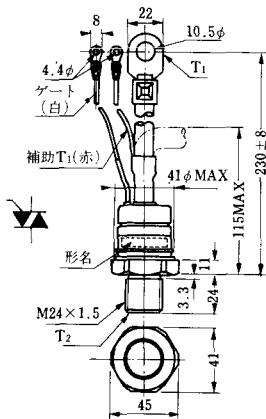


MT-21

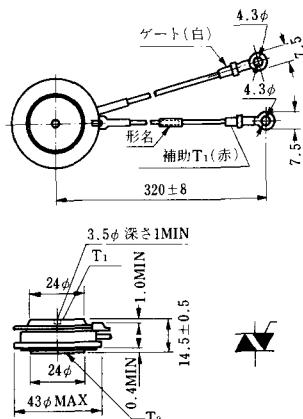


MT-22

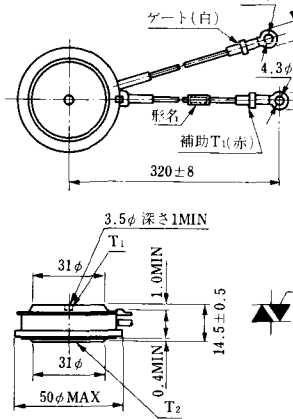

MT-23

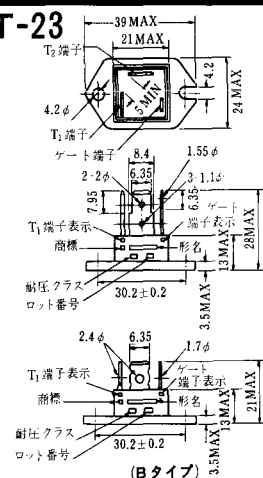


MT-24



TO-3P

- ① T1 端子
- ② T2 端子
- ③ ゲート 端子
- ④ T2 端子

N-9




電極接続

K : カソード

A : アノード

G : ゲート

NA-1

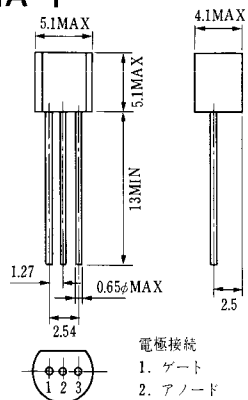


電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2

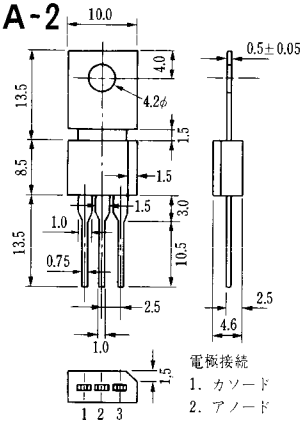


電極接続

1. カソード
2. アノード
3. ゲート

JEDEC: TO-202AA


NI-16

503PLF
503PLH




NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA




NI-23

1201PGA「E



NI-24


2001PGB⁺ J_E



NI-25


NI-26

NT-1




電線接続
① T₁
② ゲート
③ T₂

NT-2




電線接続
① T₁
② ゲート
③ T₂

NT-3

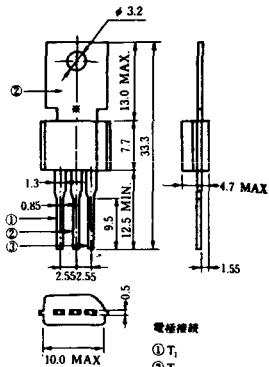


電線接続
① T₁
② T₂
③ ゲート

NT-4

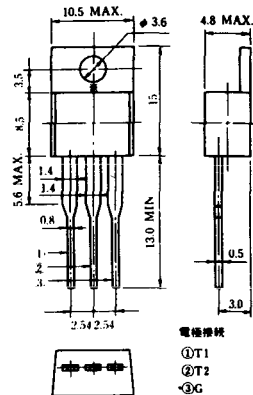


電線接続
① T₁
② T₂
③ G

NT-5

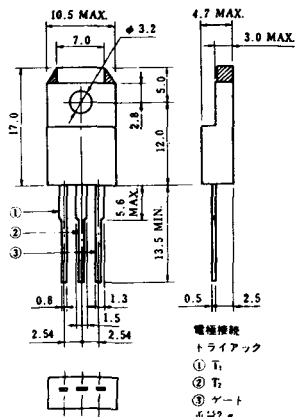


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-6

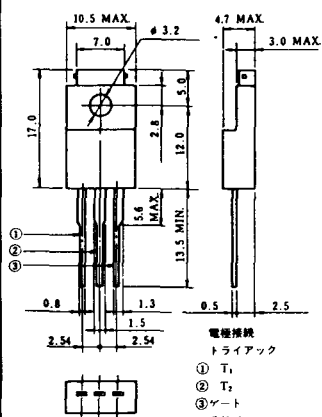


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-7

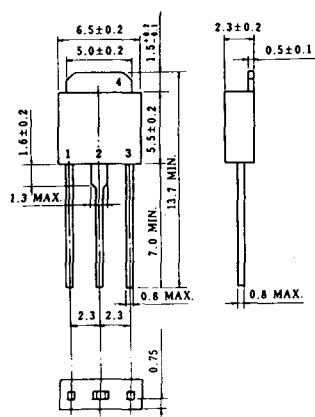


NT-8

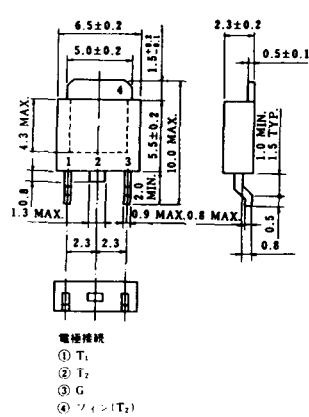


電線接続
① T₁
② T₂
③ G
④ T₂ (T₁)


S-1

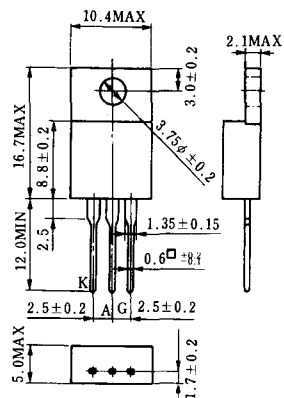


ST-1

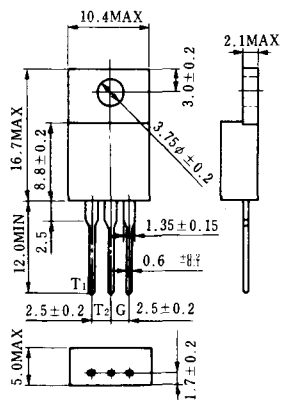


SA-9

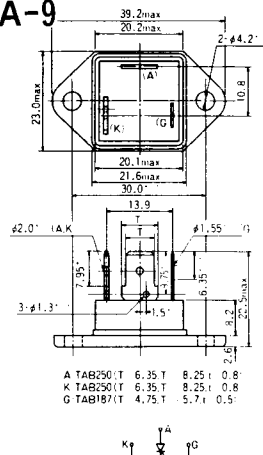


SA-10

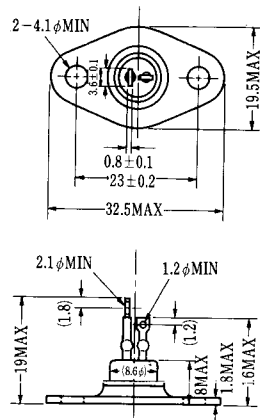


SA-11

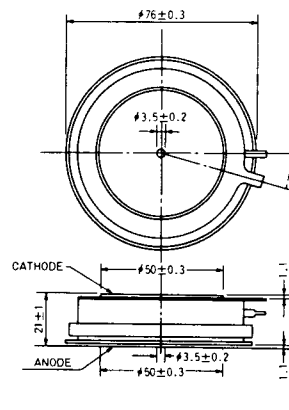

SA-12

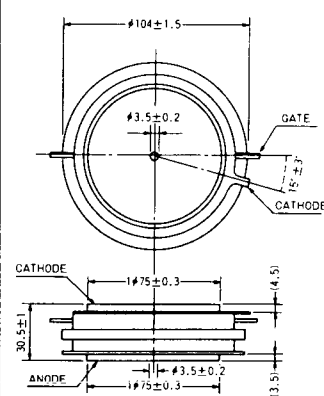


SAT-1

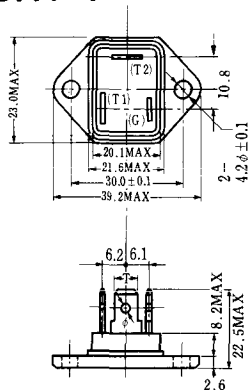


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)


SAT-2

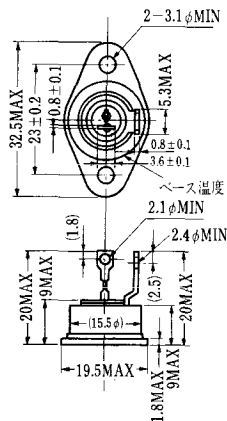


SAT-3

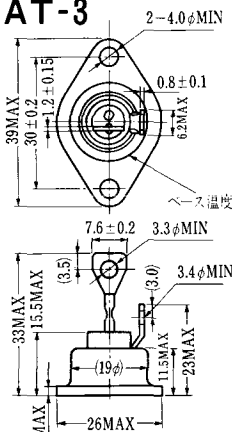


SAT-4

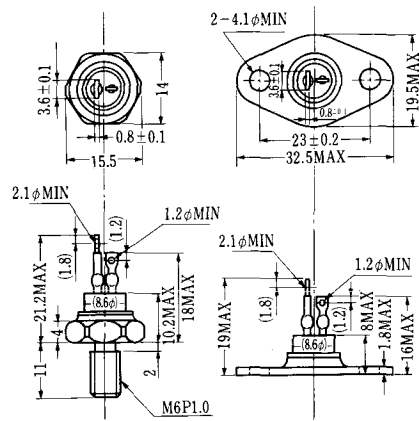


SAT-5

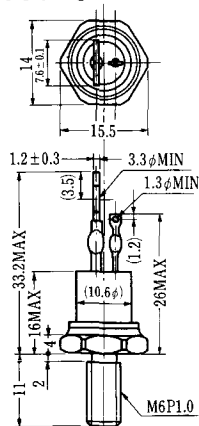


SAT-6

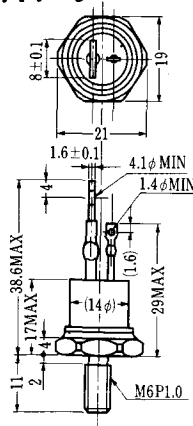


SAT-7

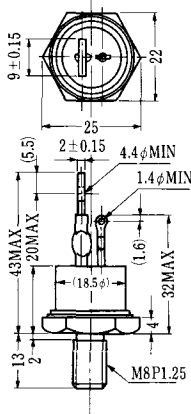


SAT-8

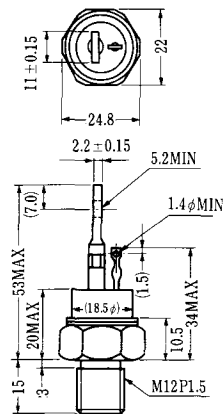


SAT-9.

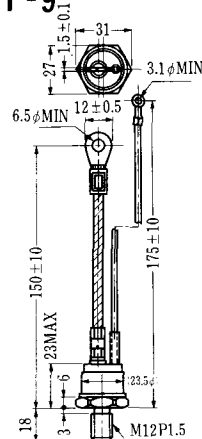


SAT-10

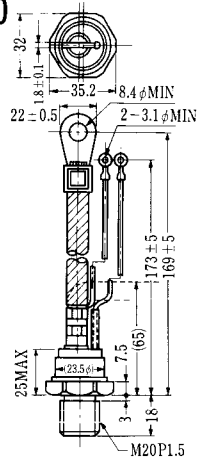


SAT-11

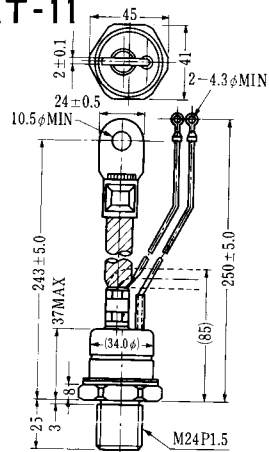


SY-1(1096A)




SY-2(1151)

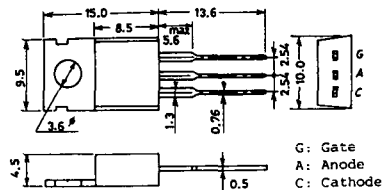


SY-3(1104)



SY-4(1150)

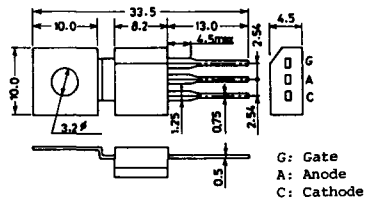


1097A




G: Gate


1102




1141




1142




1144

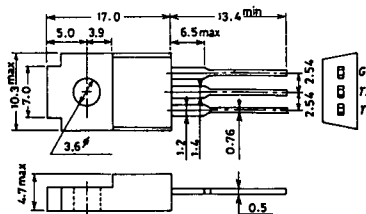

1155


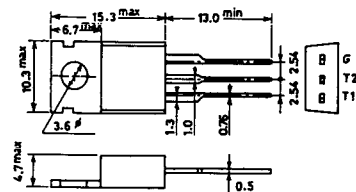


1192A





G: Gate

T-1 (13-5A1A)




- 1 ゲート
- 2 アノード
- 3 カソード

T-2
(13-8A1A)




1. カソード
2. ゲート
3. アノード(ケース)

T-3 (13-8C1A)

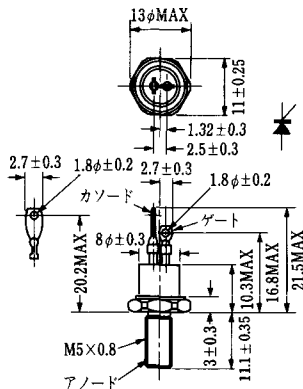



- 1 カソード
- 2 アノード
- 3 ゲート

T-4 (13-10A1A)




- 1 カソード
- 2 アノード
- 3 ゲート

T-5 (13-10B1A)




- 1 カソード
- 2 アノード
- 3 ゲート

T-6 (13-11D1A)

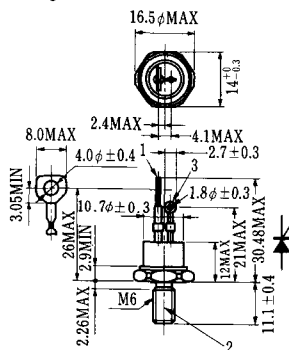

- 1 カソード
- 2 アノード
- 3 ゲート



T-7
(13-13A1A)

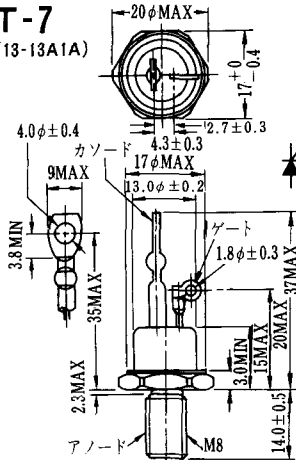

- アノード


T-8

(13-13B1A)




1. ゲート
2. カソード
アノード(ケース)


T-17 (13-42A1A)

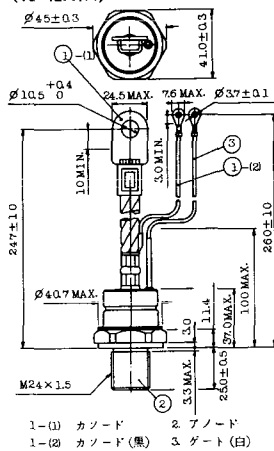


T-18 (13-45D1A)

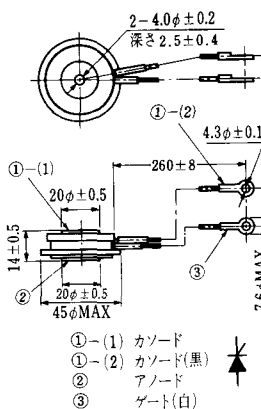


T-19 (13-52B1A)

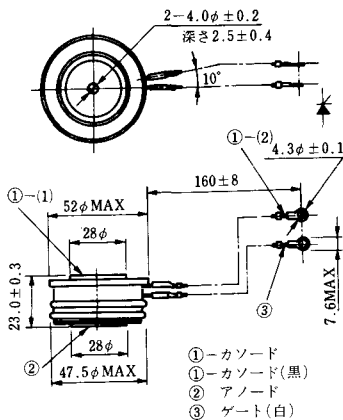


T-20 (13-52C1A)

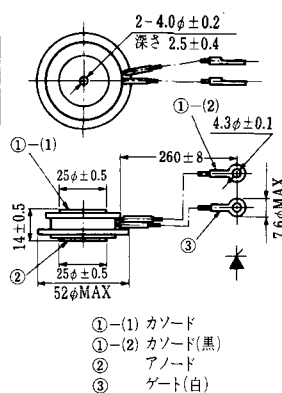


T-21 (13-60A1A)

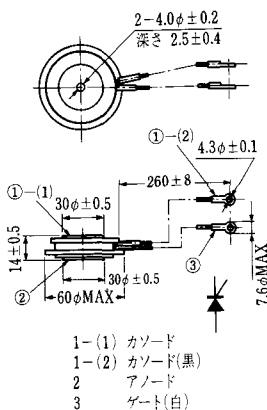


T-22 (13-70C1A)

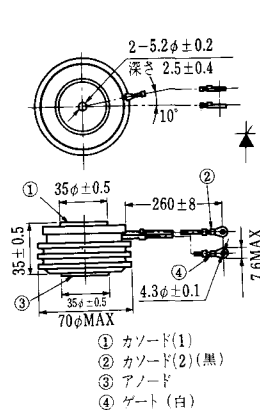


T-23 (13-78A1A)

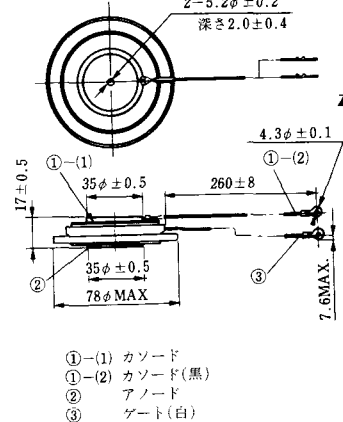


T-24 (13-100C1A)

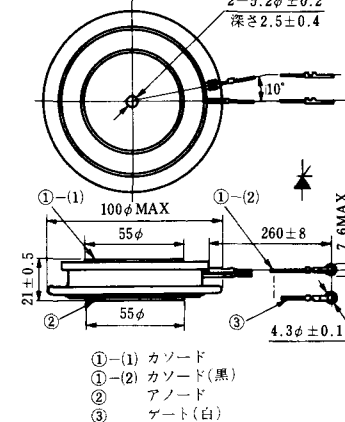


T-25 (13-120A2A)

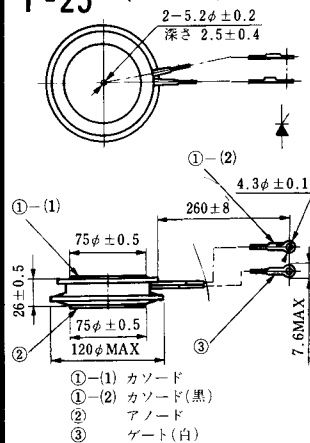


T-26 (13-150A1A)

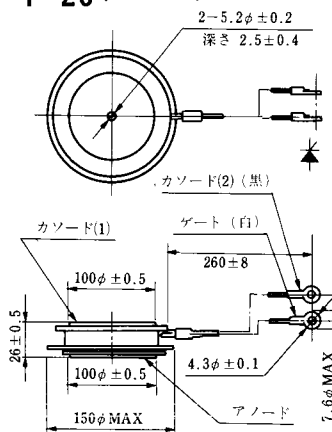


T-27 (13-37A1A)

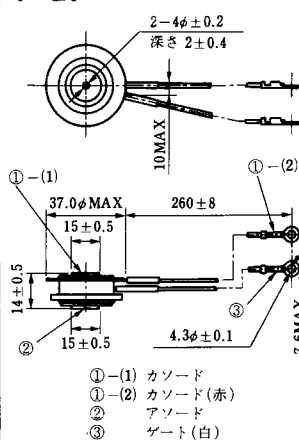


T-28 (13-45E1A)

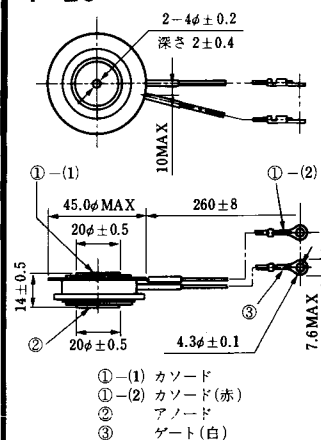


T-29 (13-51A1A)

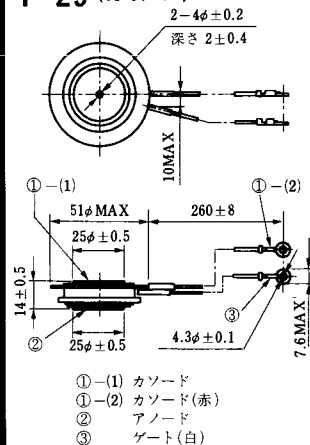


T-30 (13-57A1A)

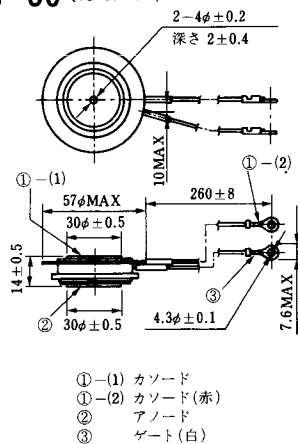


T-31 (13-100E1A)

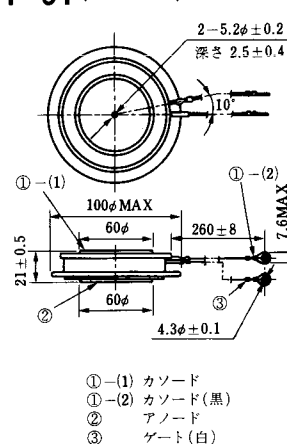

T-32 (13-60E3A)

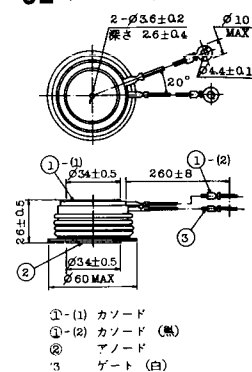


T-33 (13-78B1A)




- ① カソード
- ② アノード
- ③ ゲート

T-34 (13-66A1A)

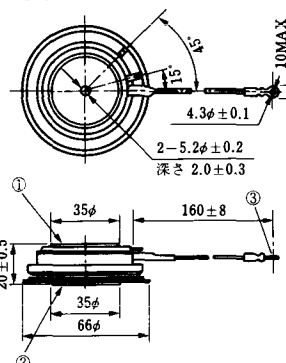


- ① カソード
- ② アノード
- ③ ゲート

T-35 (13-100D1A)

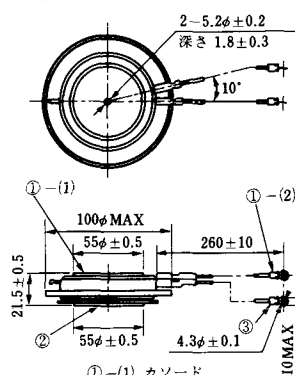


- ①-(1) カソード
- ①-(2) カソード(黒)
- ② アノード
- ③ ゲート(白)

T-36 (13-120E1A)

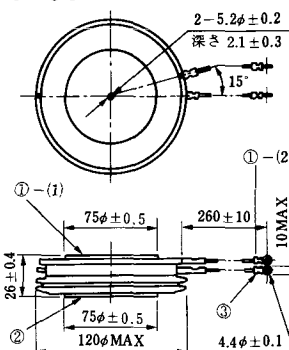


- ①-(1) カソード
- ①-(2) カソード(黒)
- ② アノード
- ③ ゲート(白)

T-37 (13-120A1A)




- ①-(1) カソード
- ①-(2) カソード(黒)
- ② アノード
- ③ ゲート(白)

T-38 (13-120C1A)




- ① カソード
- ② アノード
- ③ ゲート

T-39 (13-80B1A)




- ①-(1) カソード
- ①-(2) カソード(黒)
- ② アノード
- ③ ゲート(白)

T-40 (13-28A1A)

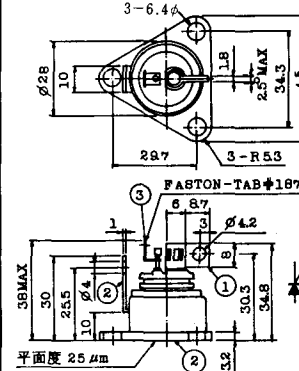


- 1. カソード
- 2. アノード
- 3. ゲート


T-41 (13-28A2A)

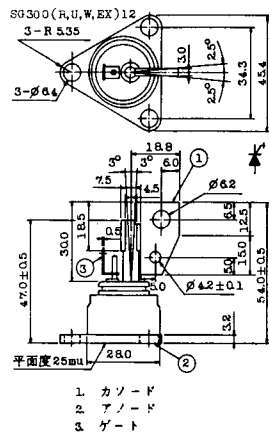


T-42 (13-45F1A)

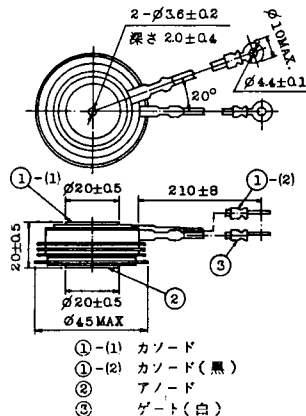


T-43 (13-60E2A)

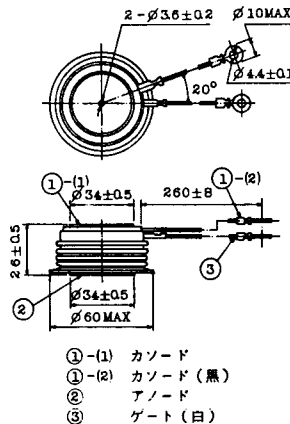


T-44 (13-36A1A)

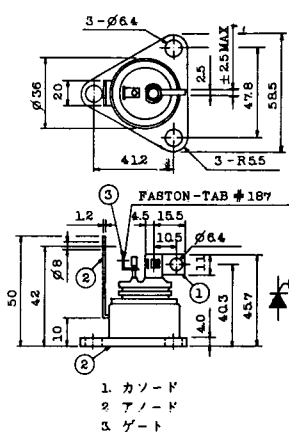


T-45 (13-51B1A)

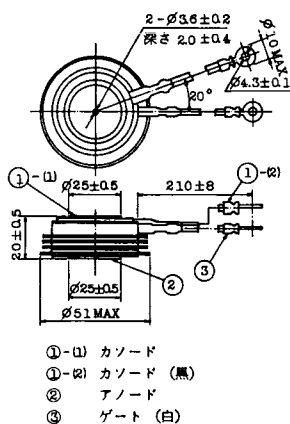


T-46 (13-36B1A)

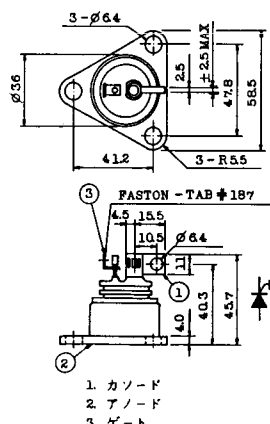


T-47 (13-60E1A)

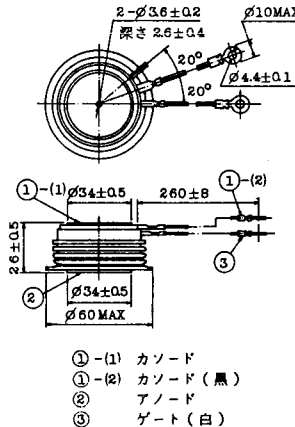


T-48 (13-93C1A)

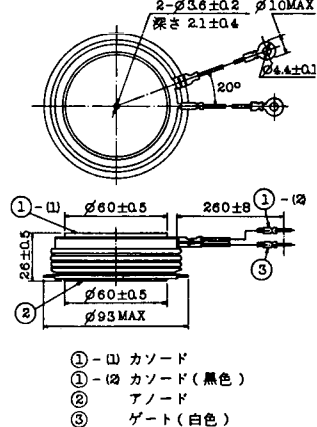


TT-1

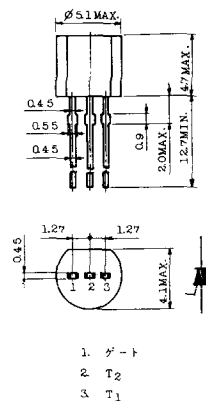


TT-2

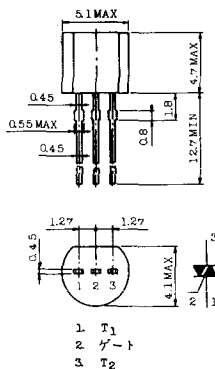


TT-3

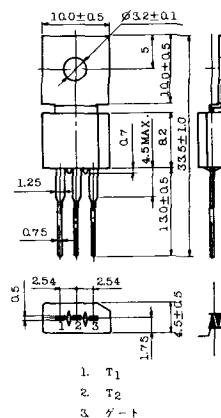


TT-4

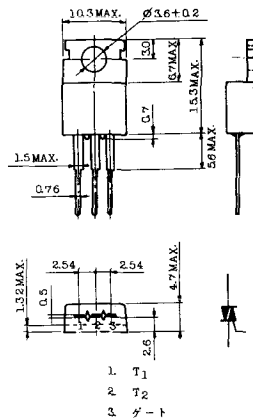


TT-5

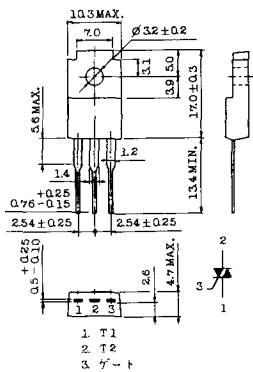


TT-6

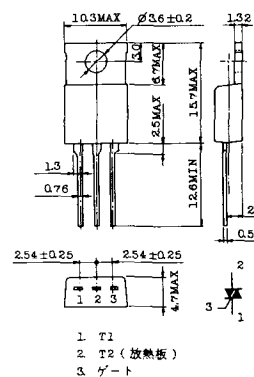


TT-7

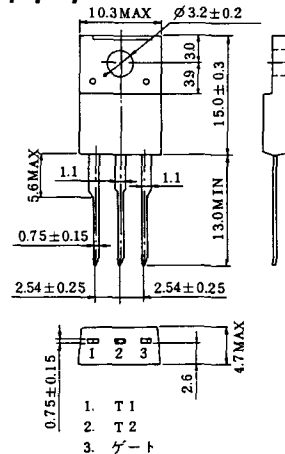

TT-8

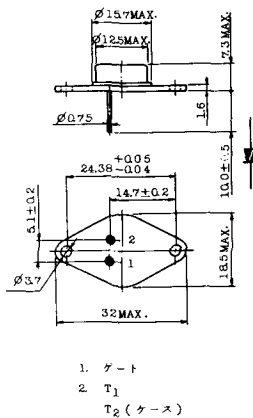


TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10




1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

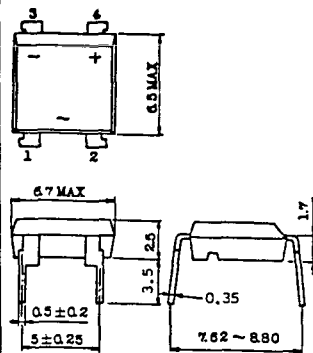


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

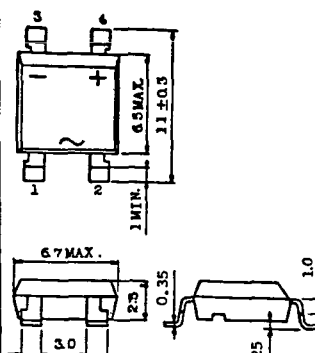


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)




1. ゲート
2. T₁
- T₂ (ケース)


TT-16 (13-16A1A)








1. T₁
2. T₂
3. ゲート

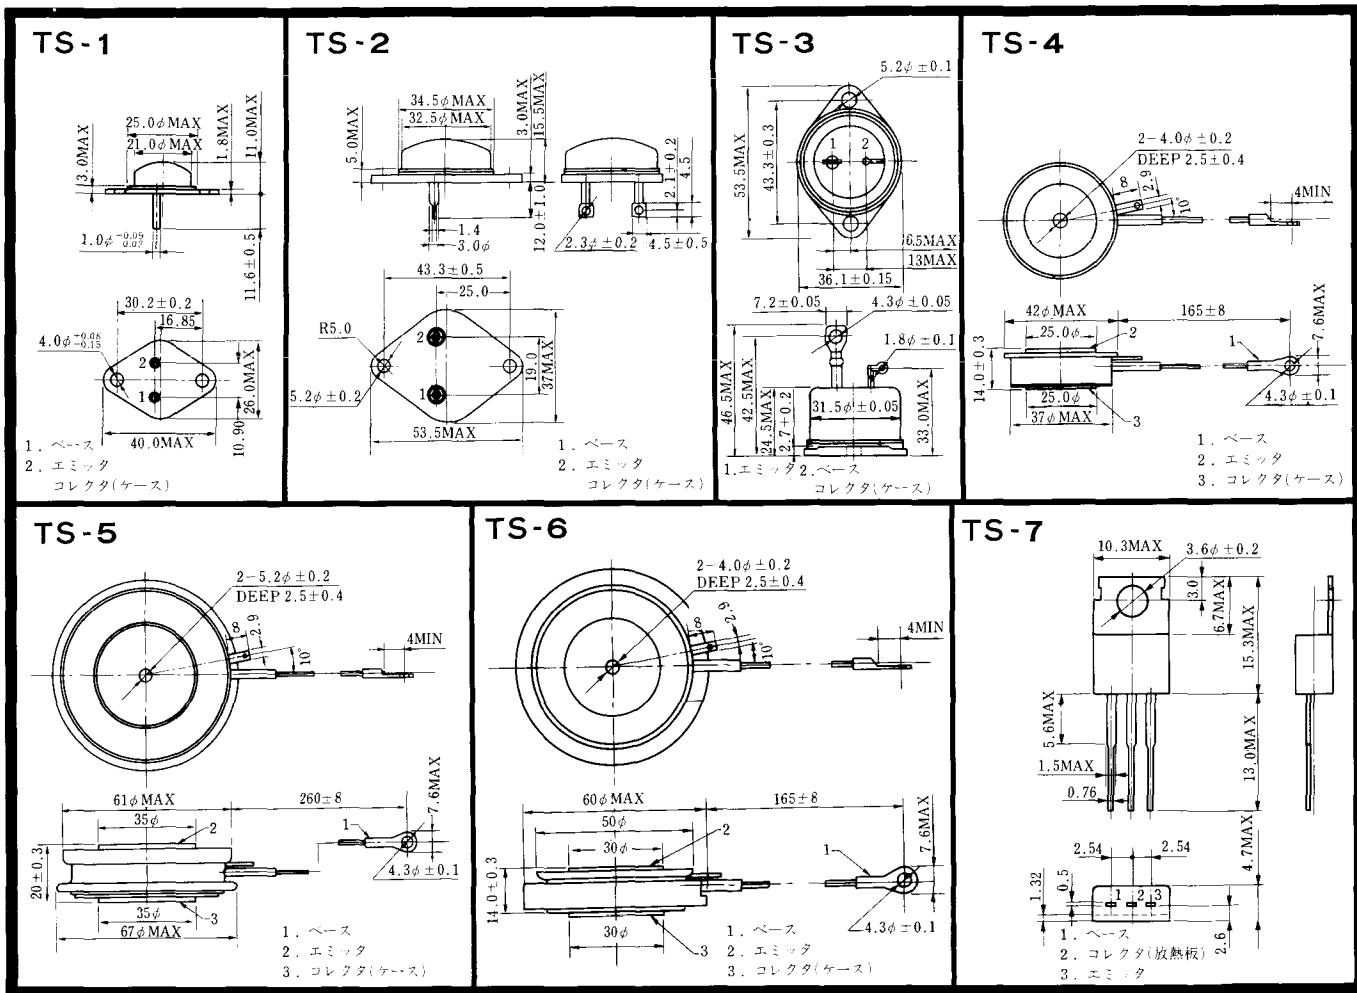


TS-8

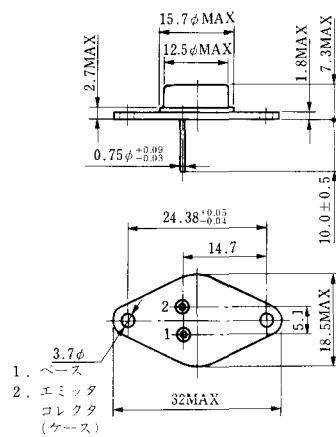





S-94B2A

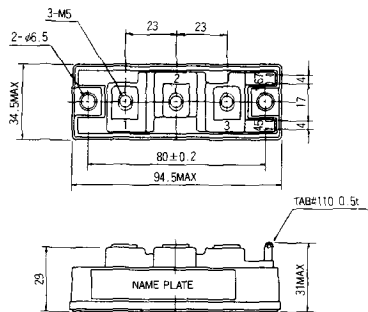


S-94D1A

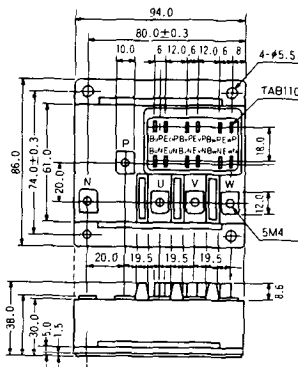


S-95A1A




S-95B1A

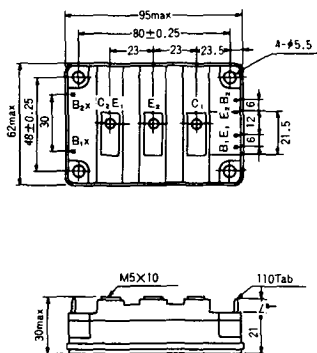


S-98B1B

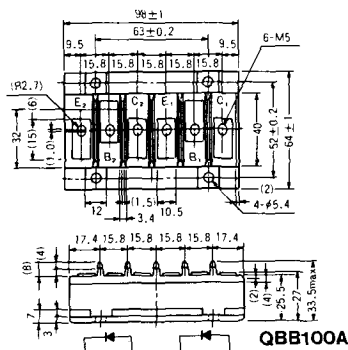


S-108A2A




S-108B1A

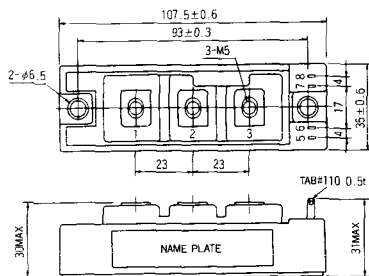


S-108B1B




S-108B1C

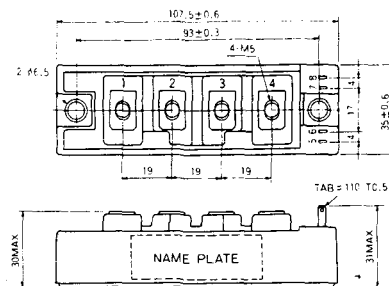


S-108B2A

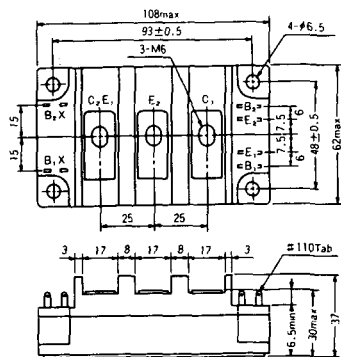


S-108B2B

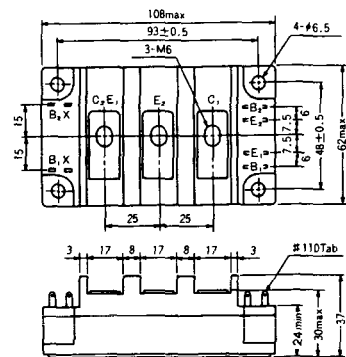


2-22B1A

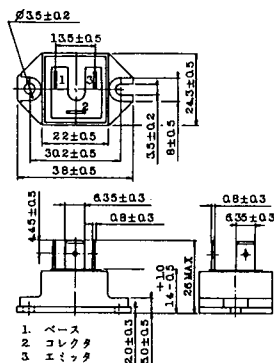


2-27A4A




2-33C1A

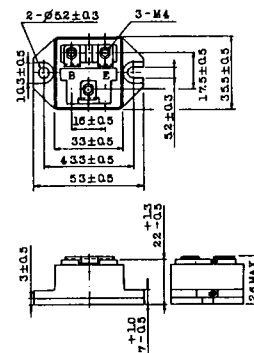


2-33D1A




2-33F1A

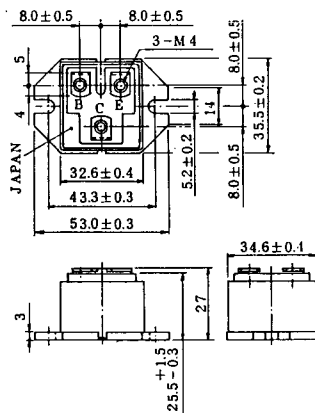


2-37A1A

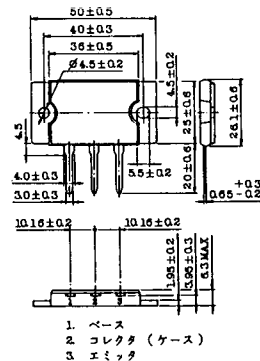


2-48A3A




2-48A3B




2-48A4A




2-64A2A






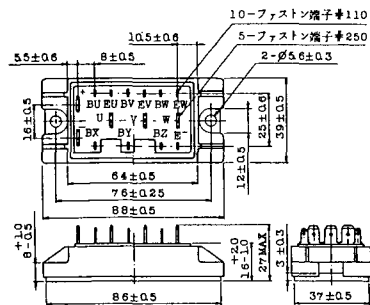


2-64A2B

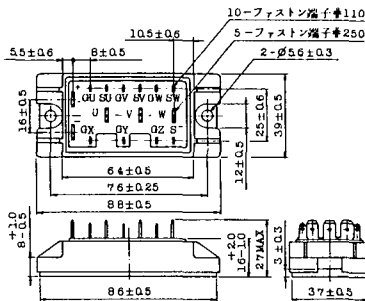


2-68A2A

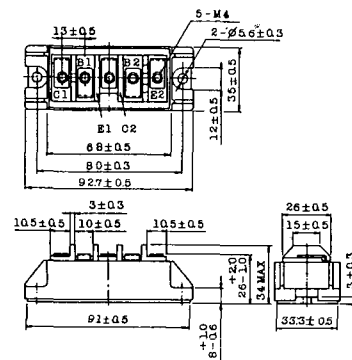


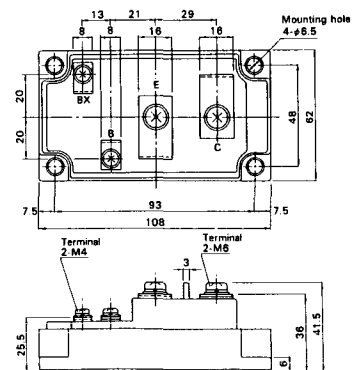


M-107

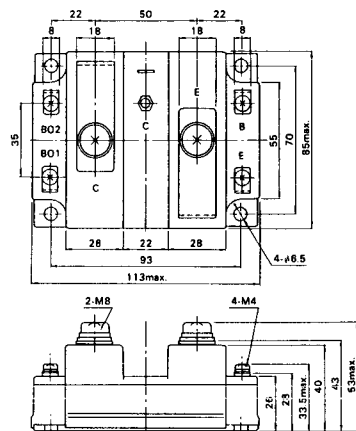


M-116




M-201




M-202

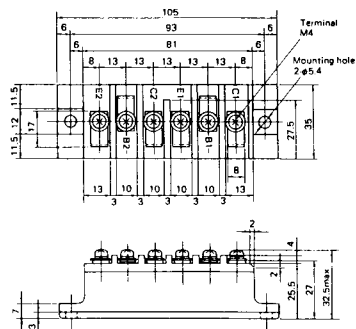


M-203

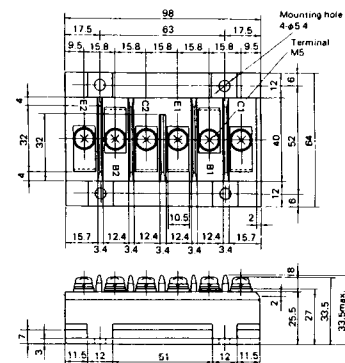


M-204

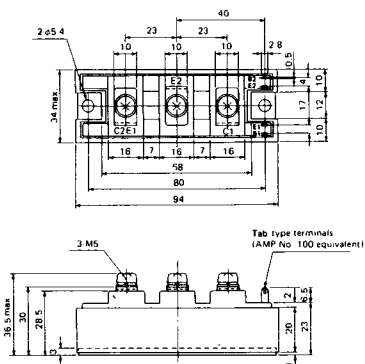


M-205

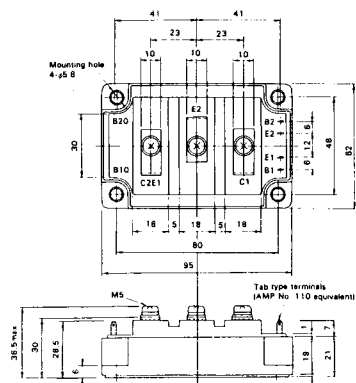


M-206

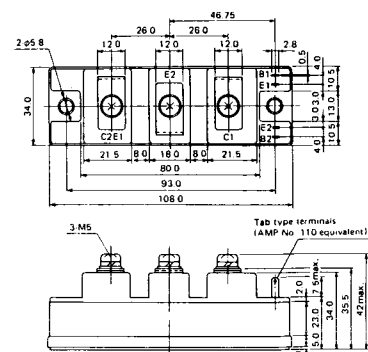


M-207

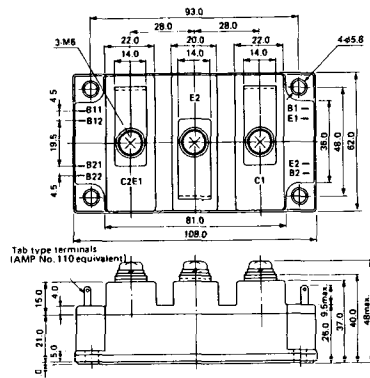


M-208

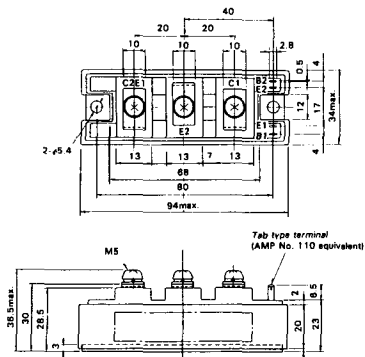


M-209

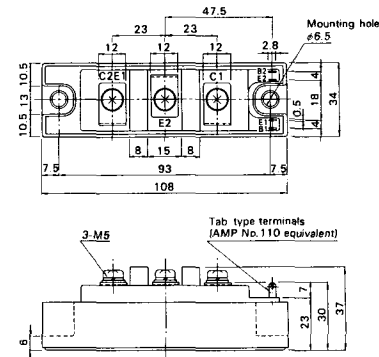


M-210

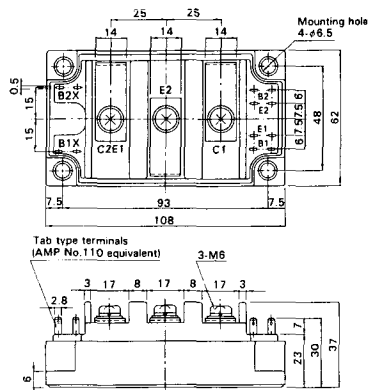


M-211



M-212




M-213




M-214


M-215




M-216




M-217




M-218




M-601

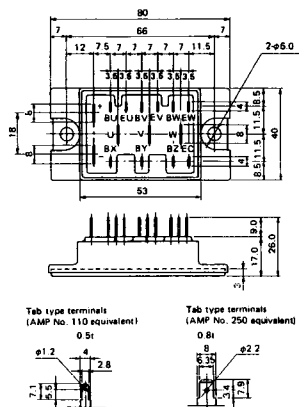


M-602

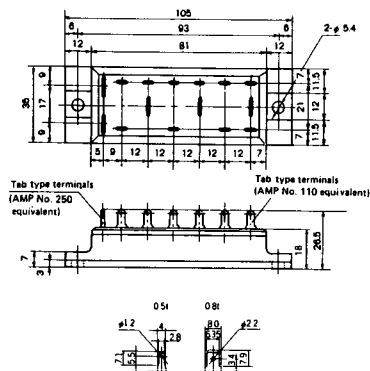


M-603

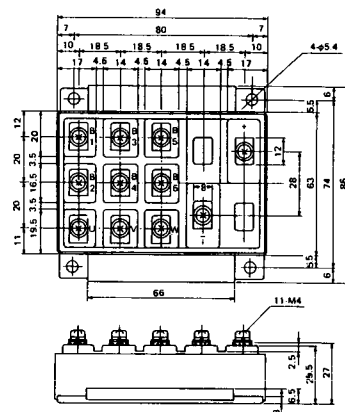


M-604




M-605

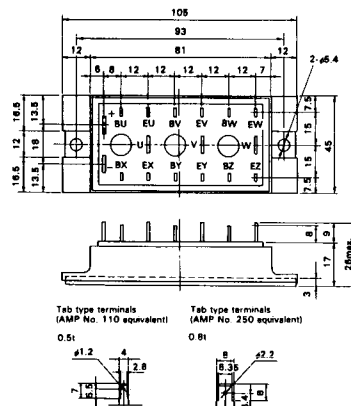


M-606




M-2E6A

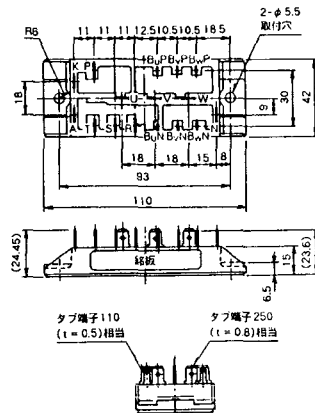


M-2F6A




M-2G6A

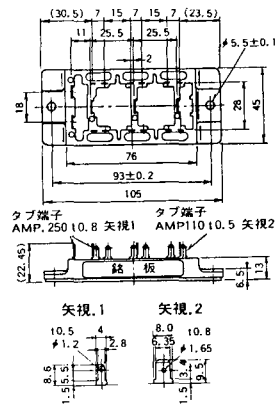


M-3A1A




M-3B1A




M-3B1B

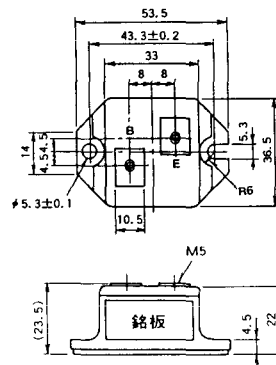


M-4A2B




M-4B2A




M-5A1A




M-5A1B




M-5A2A




M-5B2A




M-5C2A




M-5D2A




M-6A1A

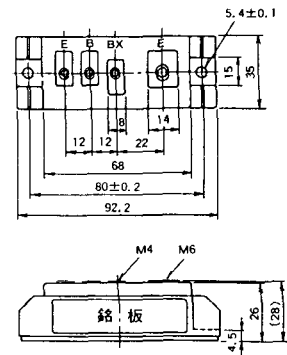


M-7A1A

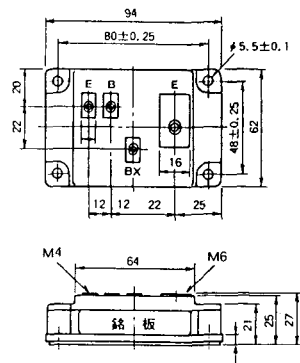


M-7B1A




M-8A1A




M-8A1B




M-8A2A




M-8A2B




M-8B2A

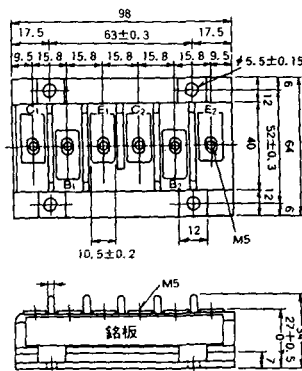


M-9A1A




M-9A2A




M-10A2A




M-10A2B




M-11A2A

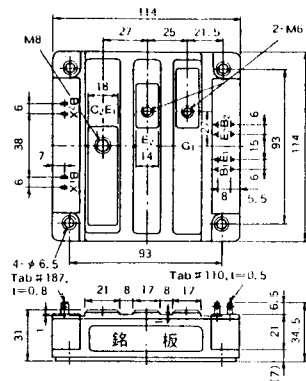


M-12A6A

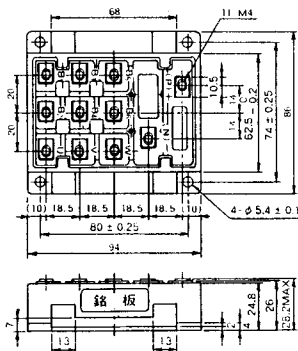


M-12B6A




M-12B6B

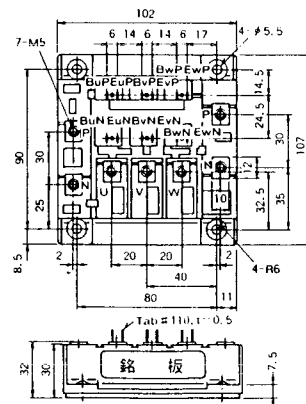


M-4A2D

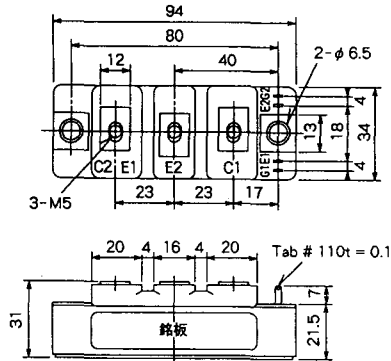


M-4A2E

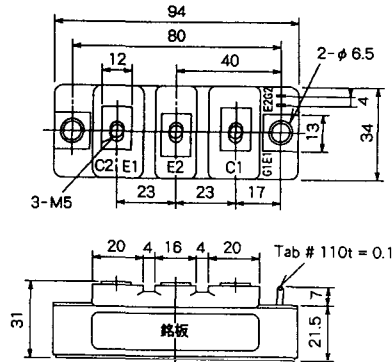


M-4C2A

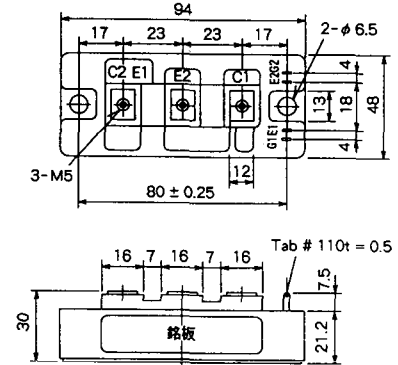


M-4C2B

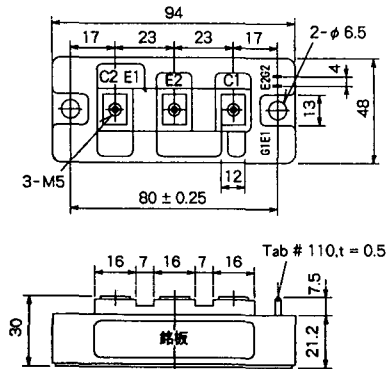


M-9B1C

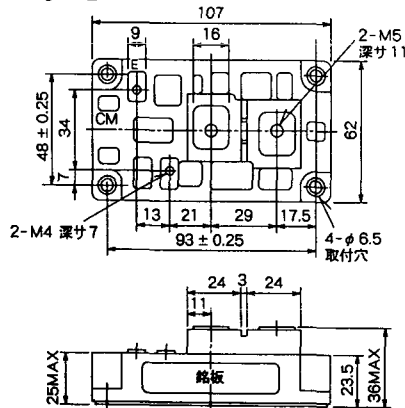


M-9D2A

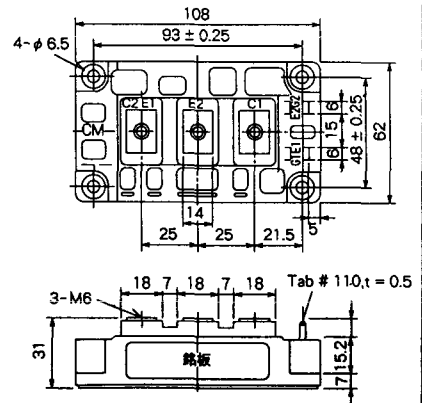




M-9D2B

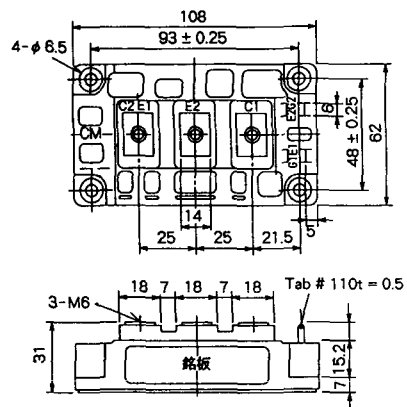

M-10A2C

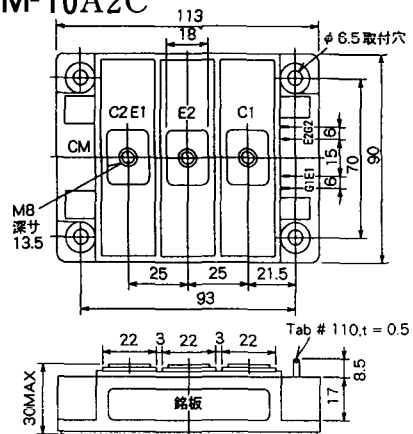


H-101

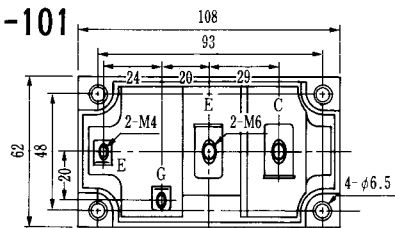


Weight :480g

TERMINALS



H-201

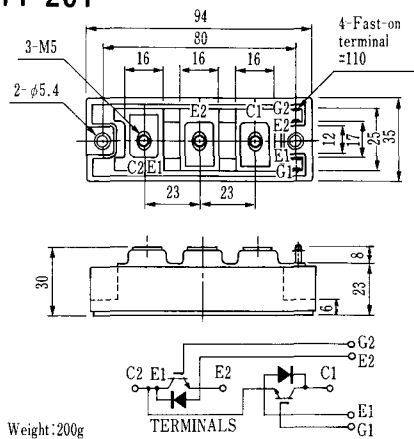



H-202

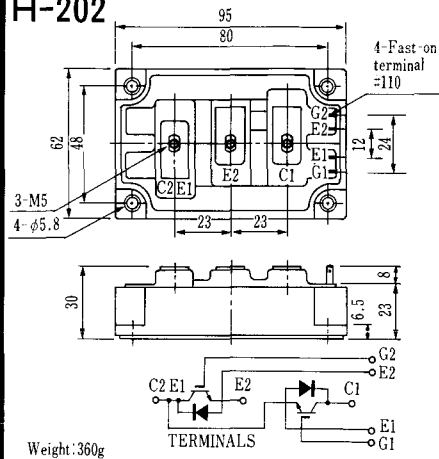


LF-J

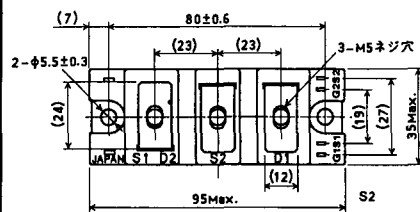


LF-K

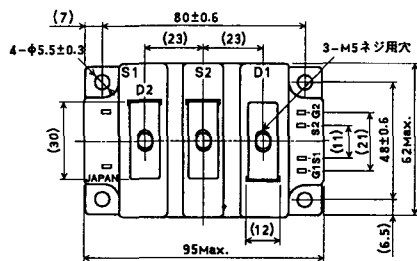


U-1

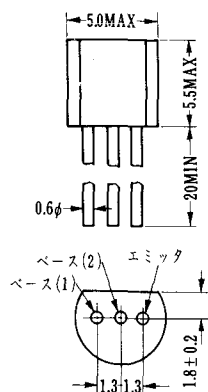


U-2

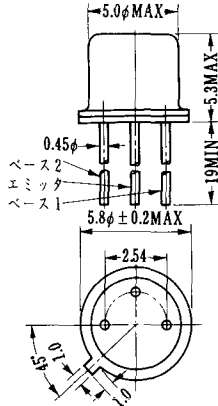

U-3

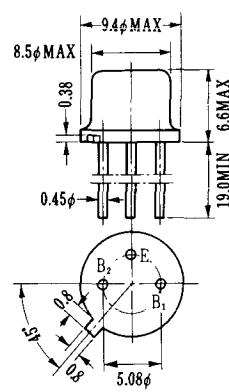


U-4

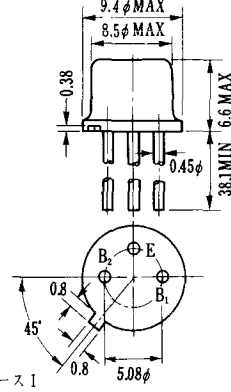

電極接続


B₁: ベース1
B₂: ベース2
E: エミッタ

U-5

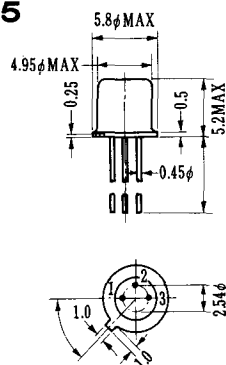


1. BASE1
2. EMITTER
3. BASE2 (CASE)

U-6

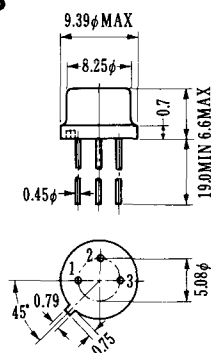

1. BASE(2)
2. EMITTER
3. BASE(1)

U-7

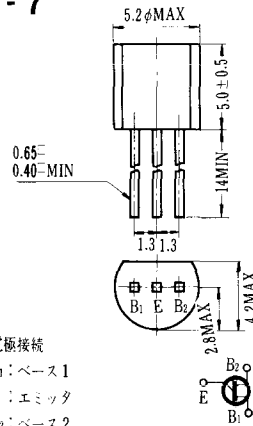

電極接続

B₁: ベース1
E: エミッタ
B₂: ベース2

U-8

