

# ESAC63-004 (20A)

(40V / 20A )

## SCHOTTKY BARRIER DIODE


### ■ Features

- Low VF
- Super high speed switching
- High reliability by planer design

### ■ Applications


- High speed power switching

### ■ Outline drawings, mm

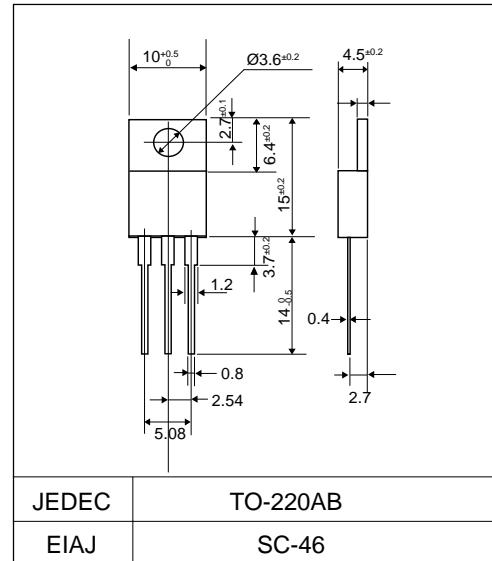

JEDEC TO-220AB  
EIAJ SC-46

### ■ Connection diagram



### ■ Maximum ratings and characteristics

- Absolute maximum ratings






Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		45	V
Non-repetitive peak reverse voltage	$V_{RSM}$	$t_w=500\text{ns}$ , duty=1/40	48	V
Average output current	$I_o$	Square wave, duty=1/2 $T_c=109^\circ\text{C}$	20*	A
Surge current	$I_{FSM}$	Sine wave 10ms	120	A
Operating junction temperature	$T_j$		-40 to +150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to +150	$^\circ\text{C}$

\* Average forward current of centertap full wave connection

- Electrical characteristics (Ta=25°C Unless otherwise specified )

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_{FM}$	$I_{FM}=10\text{A}$	0.6	V
Reverse current	$I_{RRM}$	$V_R=V_{RRM}$	15	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.0	$^\circ\text{C/W}$

## ■ Characteristics

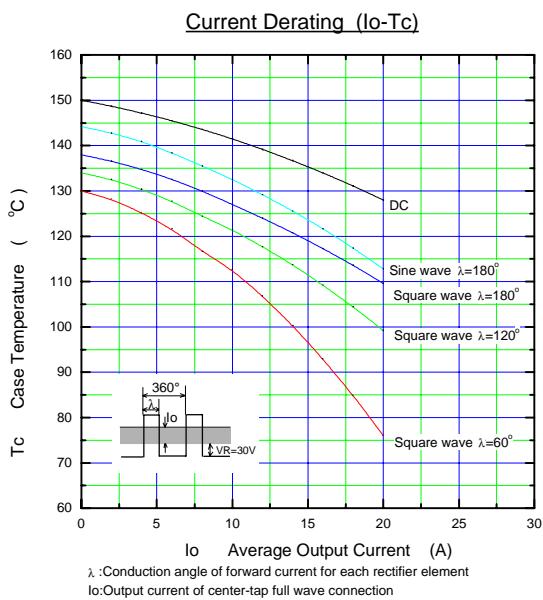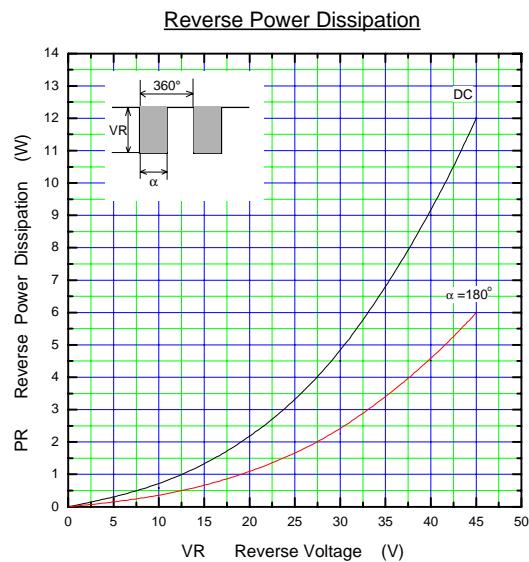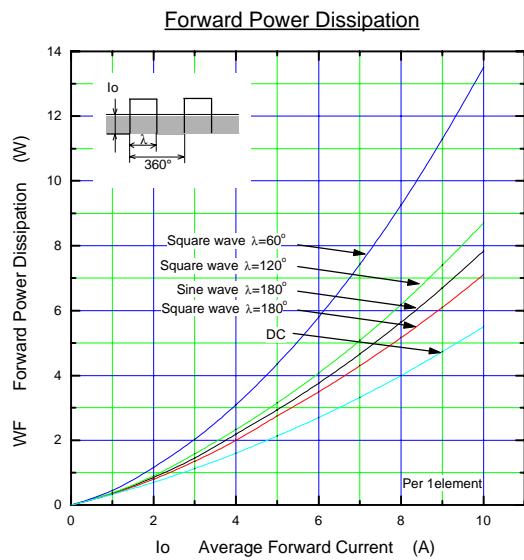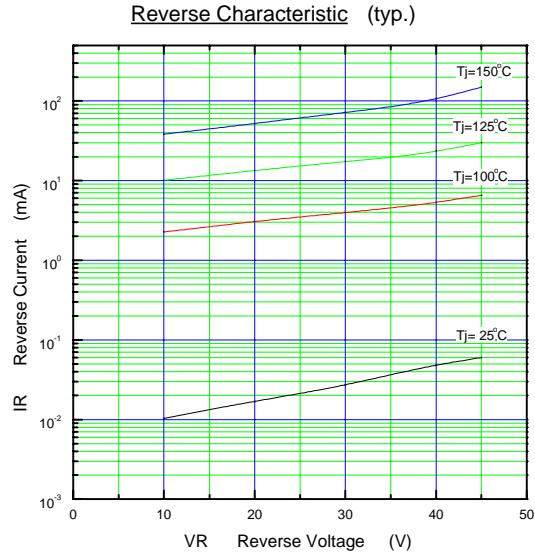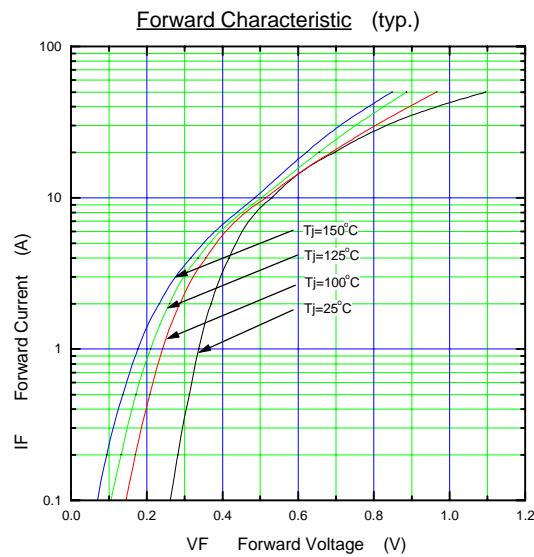

$\lambda$ : Conduction angle of forward current for each rectifier element  
Io: Output current of center-tap full wave connection

