

## 200CNQ... SERIES

### SCHOTTKY RECTIFIER

200 Amp

#### Major Ratings and Characteristics



| Characteristics                               | 200CNQ...  | Units      |
|-----------------------------------------------|------------|------------|
| $I_{F(AV)}$ Rectangular waveform              | 200        | A          |
| $V_{RRM}$ range                               | 35 to 45   | V          |
| $I_{FSM}$ @ $t_p = 5 \mu s$ sine              | 26,000     | A          |
| $V_F$ @ 100Apk, $T_J = 125^\circ C$ (per leg) | 0.49       | V          |
| $T_J$ range                                   | -55 to 150 | $^\circ C$ |

#### Description/Features

The 200CNQ center tap, high current, Schottky rectifier module series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to  $150^\circ C$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ C$   $T_J$  operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

#### CASE STYLE AND DIMENSIONS

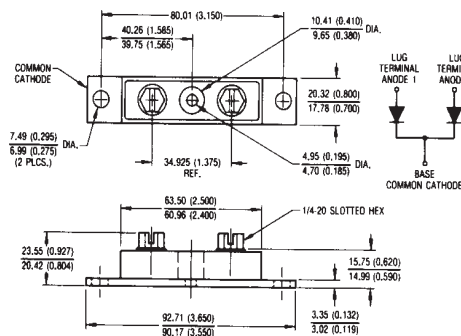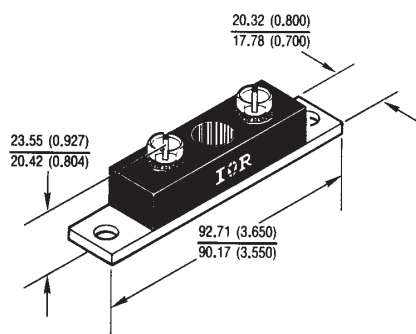

Modified JEDEC Outline TO - 244AB  
Dimensions in millimeters and inches

## 200CNQ... Series

PD-2.257 rev. A 12/97

International  
**IR** Rectifier

### Voltage Ratings

| Part number                                     | 200CNQ035 | 200CNQ040 | 200CNQ045 |
|-------------------------------------------------|-----------|-----------|-----------|
| $V_R$ Max. DC Reverse Voltage (V)               | 35        | 40        | 45        |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |           |           |           |

### Absolute Maximum Ratings

| Parameters                                                                        | 200CNQ | Units | Conditions                                                                                                               |                                                                     |
|-----------------------------------------------------------------------------------|--------|-------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| $I_{F(AV)}$ Max. Average Forward Current<br>* See Fig. 5                          | 200    | A     | 50% duty cycle @ $T_C=108^{\circ}\text{C}$ , rectangular wave form                                                       |                                                                     |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 26,000 | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse                                                                      | Following any rated load condition and with rated $V_{RRM}$ applied |
|                                                                                   | 1550   |       | 10ms Sine or 6ms Rect. pulse                                                                                             |                                                                     |
| $E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)                                | 135    | mJ    | $T_J = 25^{\circ}\text{C}$ , $I_{AS} = 20$ Amps, $L = 0.67$ mH                                                           |                                                                     |
| $I_{AR}$ Repetitive Avalanche Current (Per Leg)                                   | 20     | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |                                                                     |

### Electrical Specifications

| Parameters      |                                                            | 200CNQ | Units | Conditions                                                                  |                                       |
|-----------------|------------------------------------------------------------|--------|-------|-----------------------------------------------------------------------------|---------------------------------------|
| V <sub>FM</sub> | Max. Forward Voltage Drop<br>(Per Leg) * See Fig. 1 (1)    | 0.54   | V     | @ 100A                                                                      | T <sub>J</sub> = 25 °C                |
|                 |                                                            | 0.68   | V     | @ 200A                                                                      |                                       |
|                 |                                                            | 0.49   | V     | @ 100A                                                                      | T <sub>J</sub> = 125 °C               |
|                 |                                                            | 0.64   | V     | @ 200A                                                                      |                                       |
| I <sub>RM</sub> | Max. Reverse Leakage Current<br>(Per Leg) * See Fig. 2 (1) | 10     | mA    | T <sub>J</sub> = 25 °C                                                      | V <sub>R</sub> = rated V <sub>R</sub> |
|                 |                                                            | 400    | mA    | T <sub>J</sub> = 125 °C                                                     |                                       |
| C <sub>T</sub>  | Max. Junction Capacitance (Per Leg)                        | 5200   | pF    | V <sub>R</sub> = 5V <sub>DC</sub> , (test signal range 100Khz to 1Mhz) 25°C |                                       |
| L <sub>S</sub>  | Typical Series Inductance (Per Leg)                        | 7.0    | nH    | From top of terminal hole to mounting plane                                 |                                       |
| dv/dt           | Max. Voltage Rate of Change<br>(Rated V <sub>R</sub> )     | 10,000 | V/ μs |                                                                             |                                       |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

| Parameters                                                               | 200CNQ       | Units              | Conditions                           |
|--------------------------------------------------------------------------|--------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                                    | -55 to 150   | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                                 | -55 to 150   | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)            | 0.40         | $^\circ\text{C/W}$ | DC operation * See Fig. 4            |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)        | 0.20         | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink                  | 0.10         | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight                                                    | 79 (2.80)    | g (oz.)            |                                      |
| T Mounting Torque Base<br>Mounting Torque Center Hole<br>Terminal Torque | Min. 40 (35) | Kg-cm<br>(lbf-in)  |                                      |
|                                                                          | Max. 58 (50) |                    |                                      |
|                                                                          | Typ. 17 (15) |                    |                                      |
|                                                                          | Min. 58 (50) |                    |                                      |
|                                                                          | Max. 86 (75) |                    |                                      |
| Case Style                                                               | TO - 244AB   | Modified JEDEC     |                                      |

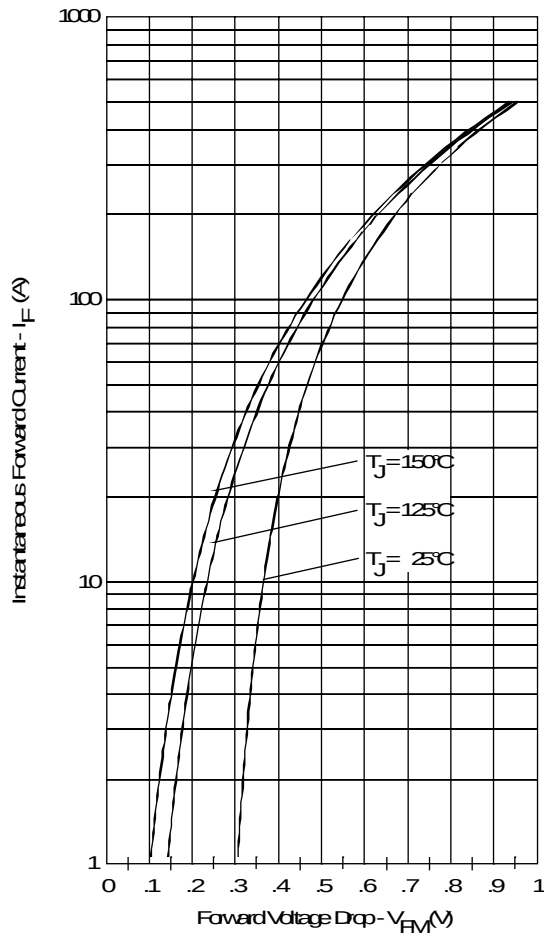


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

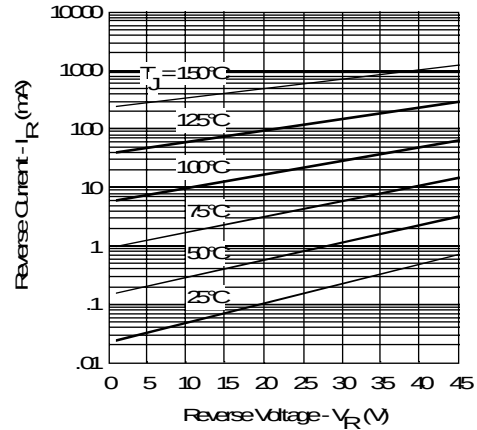


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

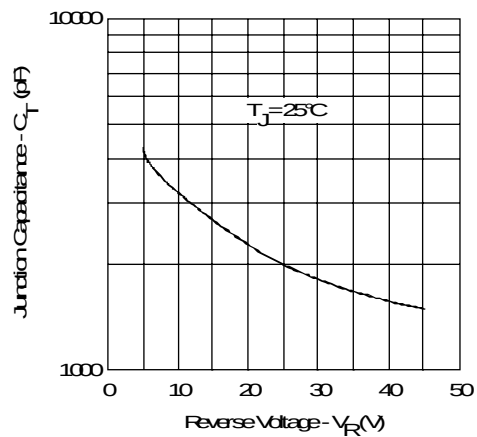


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

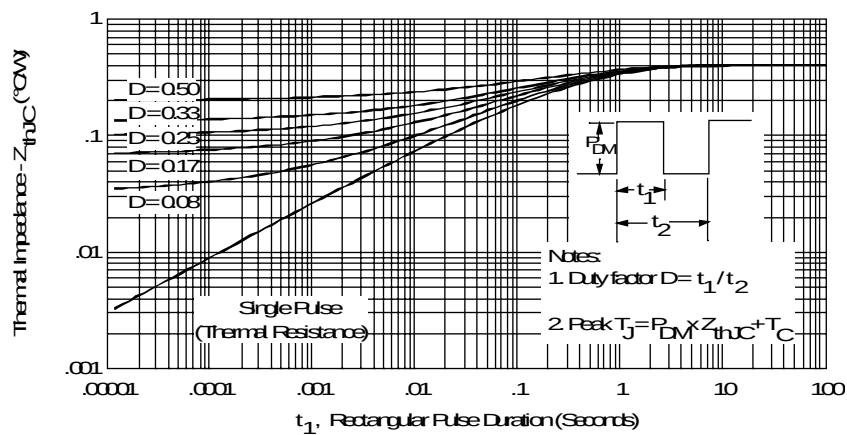


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

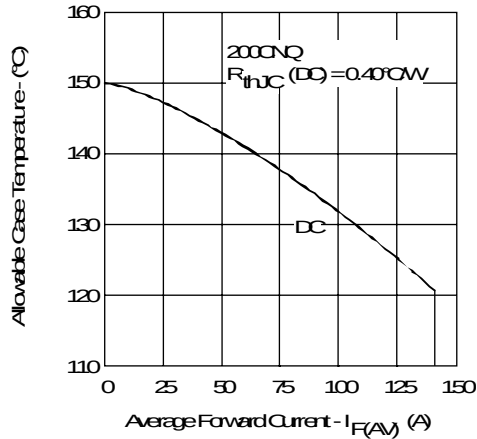


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

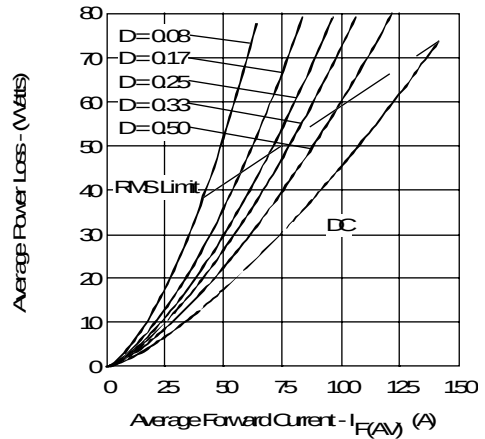


Fig. 6- Forward Power Loss Characteristics (Per Leg)

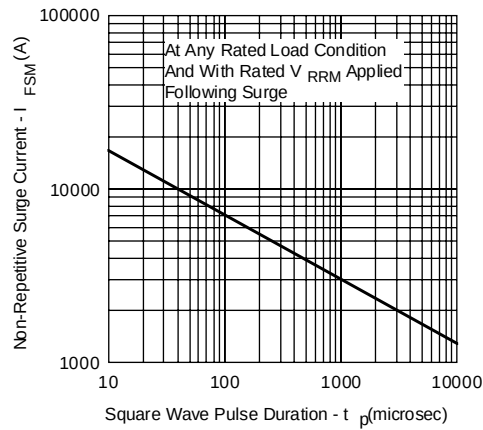


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

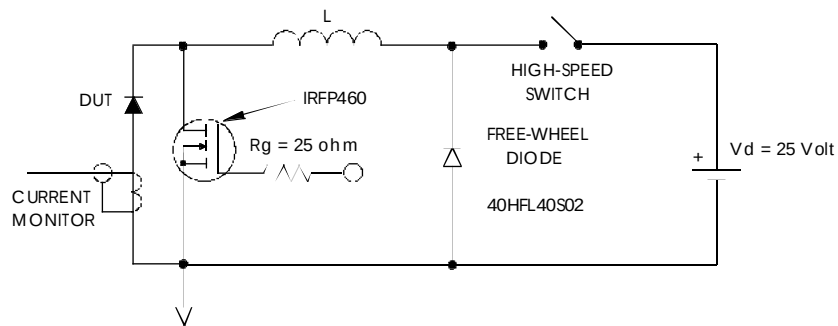


Fig. 8- Unclamped Inductive Test Circuit