


トランジスタ・モジュール (NPN, ダーリントン接続, 1個内蔵)


- ダーリントン・トランジスタ1個内蔵
- フリーホイール・ダイオード付
- 電極と金属ケース部が絶縁されている
- 直流電流増幅率は80以上(定格電流にて)

■等価回路


AL-1



BK-1




BL-1


注1. $T_c = 25^\circ\text{C}$. 注2. A.C. 1分間。

型 名	最 大 定 格 (T _c = 25℃)											電 氣 的 特 性									
	V _{CE0}	V _{CE0 (SUS)}	V _{EB0}	I _c	I _{CP} (1ms)	I _B	I _F	I _{FM} (1ms)	P _c (注1) (W)	T _j (℃)	T _{jstg} (℃)	V _{iso} (注2) (V)	I _{CBO} (mA)	V _{CE0} (V)	I _{EB0} (mA)	V _{EB0} (V)	V _{CE0 (SUS)} (V)	I _c (A)	h _{FE} (最小 最大)	V _{CE} (V)	I _c (A)
	(V)	(V)	(V)	(A)	(A)	(A)	(A)	(A)	(W)	(℃)	(℃)	(V)	(mA)	(V)	(mA)	(V)	(V)	(A)	最小 最大	(V)	(A)
MG15G1AL3	600	600	6	15	30	1.5	15	30	120	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG15H1AL1	600	600	6	15	30	1.5	15	30	120	150	-40~125	2500	1.0	600	200	6	550	0.5	100	5	15
MG25M1BK1	1000	1000	7	25	50	2.5			300	150	-40~125	2500	1.0	1000	200	7	880	1.0	100	5	25
MG30G1BL3	600	600	6	30	60	3.0			250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G1BL4	600	600	6	30	60	3.0			250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G1JL1	600	600	6	30	60	3.0	30	60	250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG50G1BL3	600	600	6	50	100	5.0			300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG50G1JL1	600	600	6	50	100	5.0	50	100	300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG50M1BK1	1000	1000	7	50	100	5.0			350	150	-40~125	2500	1.0	1000	200	7	880	1.0	100	5	50
MG60M1AL1	900	900	10	60	120	6.0	60	120	300	150	-55~150	-	1.0	900	300	10	450	0.5	100	5	60
MG75G1BL1	600	600	6	75	150	10			350	150	-40~125	2500	1.0	600	200	6	450	0.5	80	5	75
MG75M1AL1	900	900	10	75	150	7.5	75	150	350	150	-55~150	-	1.0	900	300	10	450	0.5	100	5	75
MG75M1BK1	1000	1000	7	75	150	5.0			400	150	-40~125	2500	1.0	1000	200	7	880	1.0	75	5	75
MG100G1AL3	600	600	6	100	200	10	100	200	600	150	-40~125	2500	2.0	600	400	6	450	0.5	100	5	100
MG100G1FL1	600	600	6	100	200	10	100	200	600	150	-40~125	2500	2.0	600	400	6	450	0.5	100	5	100
MG100G1JL1	600	600	6	100	200	10	100	200	400	150	-40~125	2500	2.0	600	200	6	450	0.5	100	5	100
MG150H1FL1	600	600	6	150	300	20	150	300	700	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	150
MG160S1UK1	1400	1400	7	160	320	16	160	320	1600	150	-40~125	2500	8.0	1400	600	7	1000	1.0	100	5	160
MG200H1AL2	600	600	6	200	400	25	200	400	800	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	200
MG200H1FL1A	600	600	6	200	400	25	200	400	800	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	200
MG200M1FK1	1000	1000	7	200	400	20	200	400	1400	150	-40~125	2500	8.0	1000	800	7	880	1.0	100	5	200


FK-1



FL-1



JL-1



注3. スイッチング時間の*印はtyp. 値。

(T _a = 25℃)											エミッタ・コレクタ間ダイオード							熱抵抗		等価回路	外形図	記	事	型名
飽和電圧 (V)		I _c	I _B	スイッチング時間 (μs)			I _{B1}	I _{B2}	V _{CE}	R _L	V _F (V)	I _F	t _{rr} (μs)	I _F	V _{BE} (V)	di/dt (A/μs)	R _{th(j-c)} (℃/W)							
V _{CE}	V _{BE}			t _{on}	t _{off}	t _f											R _{th(j-c)} トラジスタ部	R _{th(j-c)} ダイオード部						
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(V)	(Ω)	最大	(A)	最大	(A)	(V)	(A/μs)	最大	最大						
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.5	15	2.0	15	-3	60	1.0	3.5	AL-1	2-22B1A				MG15G1AL3
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-3	60	1.04	3.5	AL-1	2-33F1A				MG15H1AL1
2.5	3.5	25	0.5	2	20	5	0.5	-1.5	600	24							0.41		BK-1	2-33D1A	F Dなし			MG25M1BK1
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10							0.5		BL-1	2-33C1A	F Dなし			MG30G1BL3
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10							0.5		BL-1	2-33F1A	F Dなし			MG30G1BL4
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10	1.6	30	1.0	30	-3	100	0.5	1.8	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG30G1JL1
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6							0.41		BL-1	2-33C1A	F Dなし			MG50G1BL3
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6	1.7	50	1.0	50	-3	100	0.41	1.3	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG50G1JL1
2.5	3.5	50	1.0	2	20	5	1.0	-3.0	600	12							0.36		BK-1	2-33D1A	F Dなし			MG50M1BK1
2.0	2.5	60	1.2	3.5	5	1	1.2	-10	120	2	1.5	60	3.0	60	-5	10	0.42	0.75	AL-1	2-37A1A	非絶縁タイプ			MG60M1AL1
2.0	2.5	75	1.5	2	12	2	1.5	-1.5	300	4							0.36		BL-1	2-33C1A	F Dなし			MG75G1BL1
2.0	2.5	75	1.5	3.5	5	1	1.5	-12	150	2	1.6	75	4.0	75	-5	10	0.35	0.65	AL-1	2-37A1A	非絶縁タイプ			MG75M1AL1
2.5	3.5	75	2.0	1.5	20	5	1.5	-4.5	600	8							0.31		BK-1	2-80B1A	F Dなし			MG75M1BK1
2.0	2.5	100	2.0	1	12	2	2.0	-2.0	300	3	1.5	100	2.0	100	-3	100	0.208	0.65	AL-1	2-68D2A				MG100G1AL3
2.0	2.5	100	2.0	1	12	2	2.0	-2.0	300	3	1.5	100	2.0	100	-3	100	0.208	0.65	FL-1	2-68C1A				MG100G1FL1
2.0	2.7	100	2.0	2	12	2	2.0	-2.0	300	3	1.7	100	1.0	100	-3	100	0.31	1.3	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG100G1JL1
2.0	2.7	150	4.0	2	12	5	4.0	-4.0	300	2	1.5	150	2.0	150	-3	100	0.178	0.65	FL-1	2-68C1A				MG150H1FL1
2.5	3.5	160	3.2	2	16	3	3.2	-9.6	600	3.75	1.8	160	1.2	160	-3	100	0.078	0.325	UK-1	2-109A3A				MG160S1UK1
2.0	2.7	200	6.0	2	12	4	6.0	-6.0	300	1.5	1.5	200	2.0	200	-3	100	0.156	0.65	AL-1	2-68D2A				MG200H1AL2
2.0	2.7	200	6.0	2	12	4	6.0	-6.0	300	1.5	1.5	200	2.0	200	-3	100	0.156	0.65	FL-1	2-98B1A				MG200H1FL1A
2.5	3.5	200	4.0	2	15	5	4.0	-4.0	600	3	1.8	200	1.0	200	-3	100	0.089	0.325	FK-1	2-80D2A				MG200M1FK1

FD-1




FD-2




FD-3




FD-4

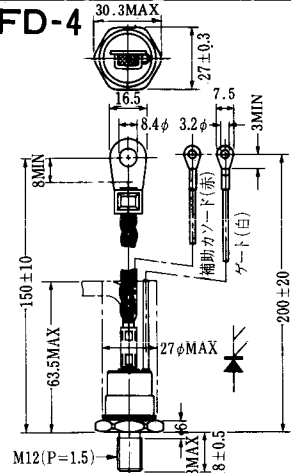


FD-5

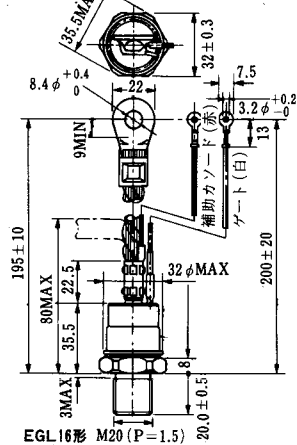


FD-6

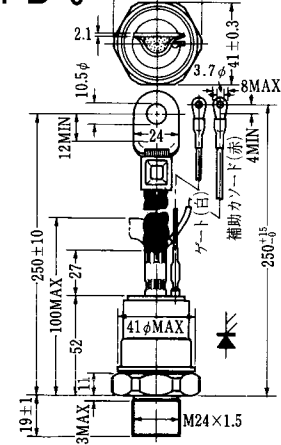


FD-7

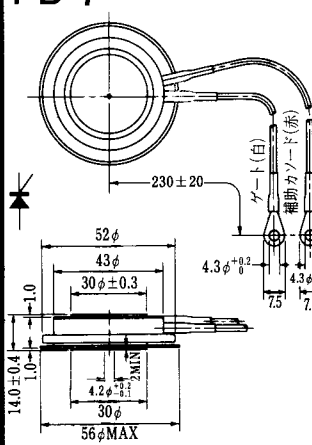


FD-8

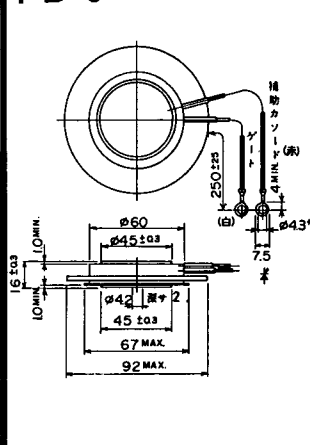


H-1

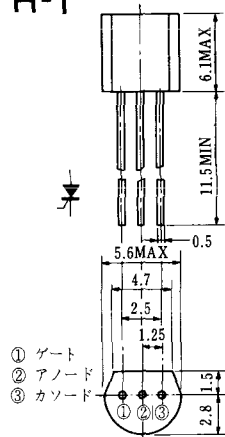


H-2

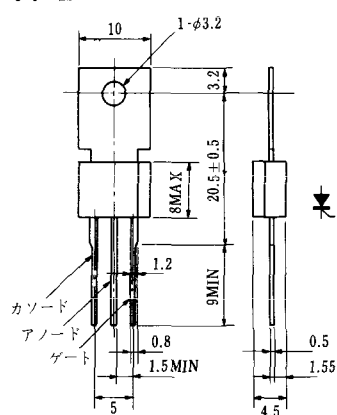


H-3




H-4

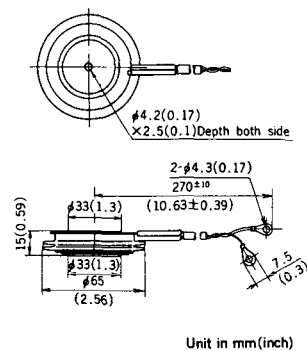


H-5




H-6

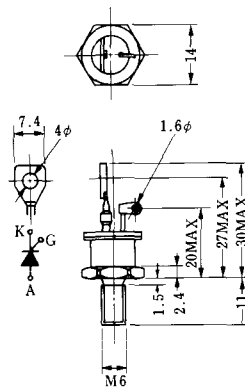


H-7

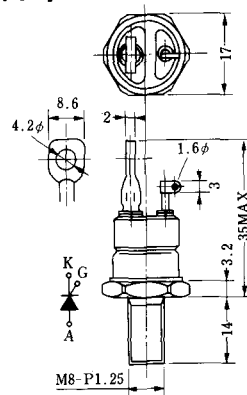

H-8A




H-8B




- ① アノード
② カソード
③ ゲート

H-9A




H-9B




- ① アノード
- ② カソード
- ③ ゲート


H-10

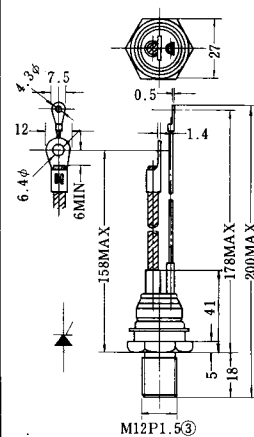


H-11

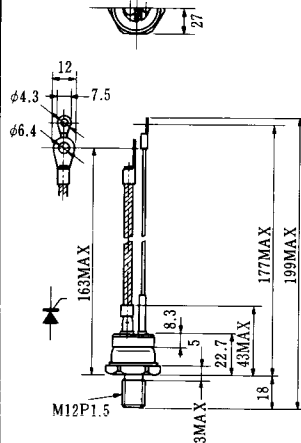


H-12

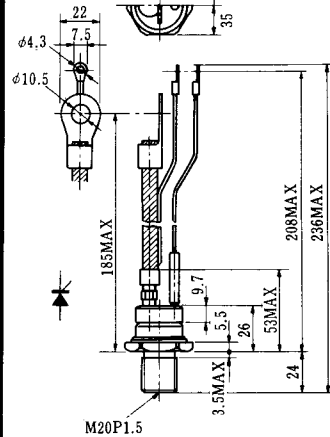

H-13

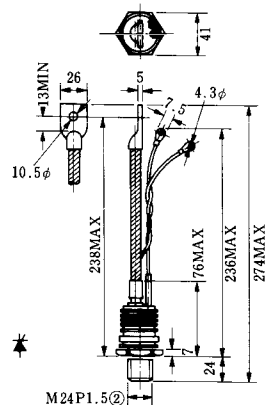


H-14




Unit in mm (inch)

H-15




Unit in mm (inch)

H-16

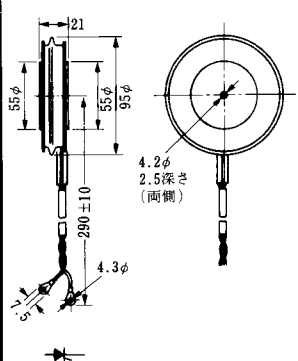

H-17

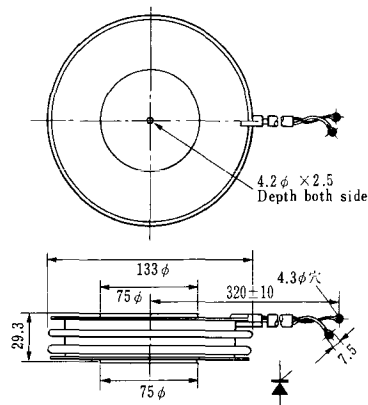

H-18



H-19



H-20



H-21



H-22



H-23



H-24



H-25



H-26



Type	Direction of polarity
CA12	


H-27



Type	Direction of polarity
CF11V	

(注) CC11V: 400 ± 10
CF11V: 250 ± 10

H-28

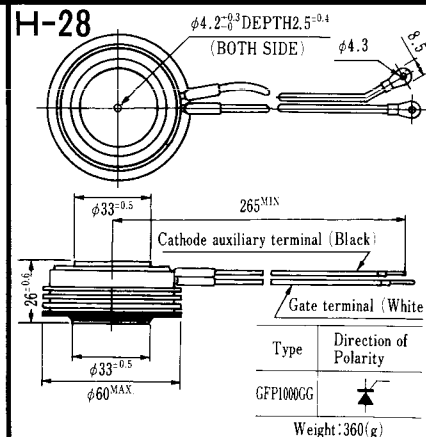

Type	Direction of Polarity
GFP100GG	

Note: The thickness is a dimension in press at the rated mounting force.

H-29



Note : The thickness is a dimension in press at the rated mounting force.

H-30



Note : The thickness is a dimension in press at the rated mounting force.

HT-1



Unit in mm (inch)

HT-2




HT-3



HT-4



HT-5

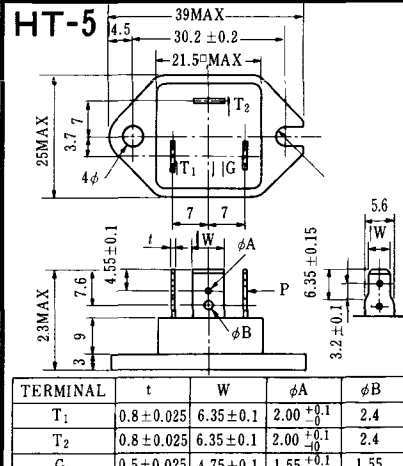

《寸法図単位：mm》


M-1




M-2



M-3

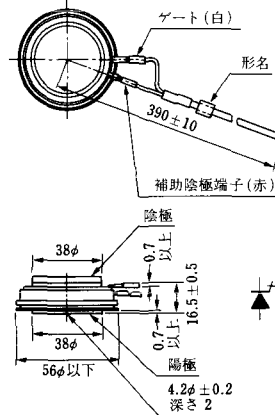

M-4

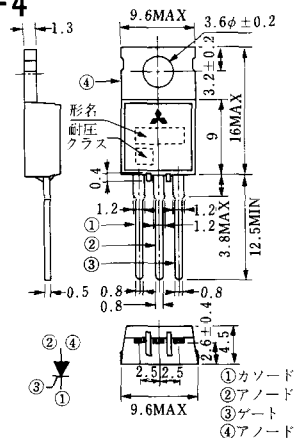


M-5




M-6



M-7

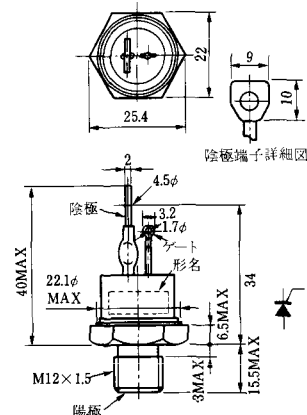

M-8

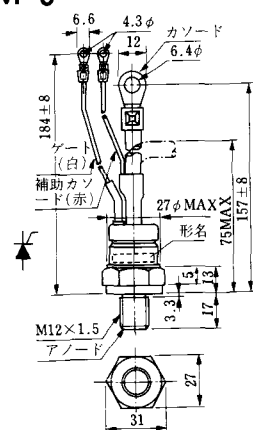


M-9



M-10



M-11

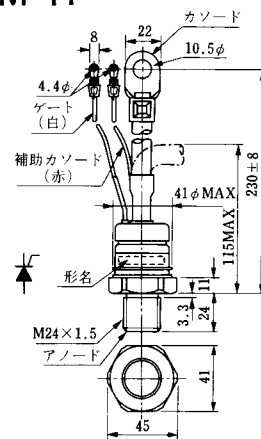

M-12




M-13



M-14



M-15

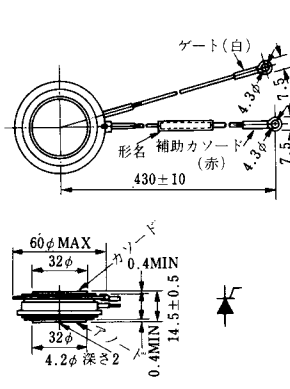


M-16




M-17




M-18

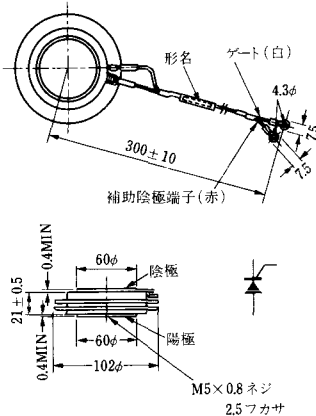


M-19

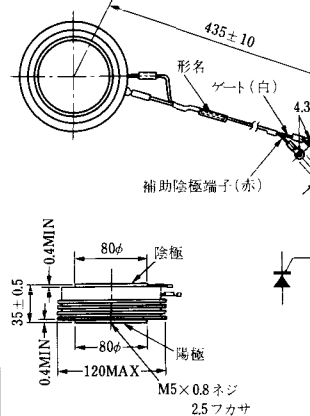


M-20

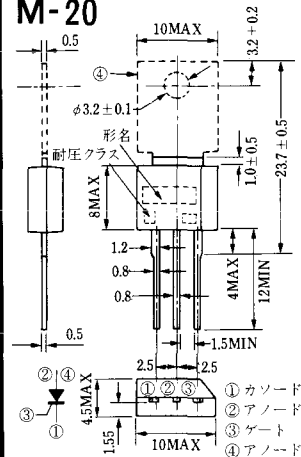


M-21

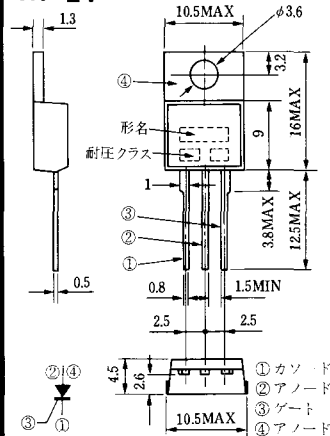


M-22

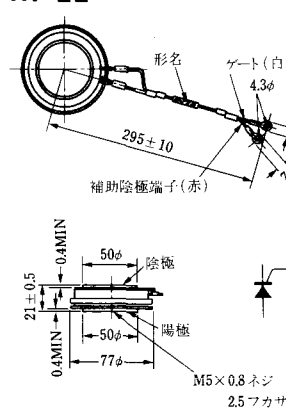

M-23

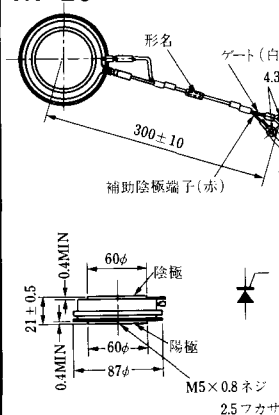

M-24

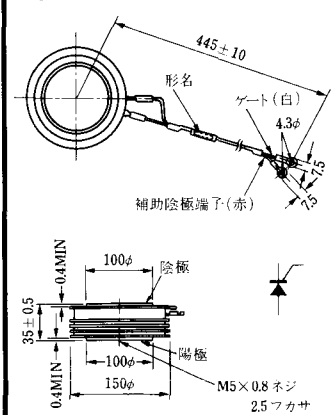

M-25



M-26



M-27



M-28



M-29



M-30



M-31



M-32




M-33




M-34




MT-1

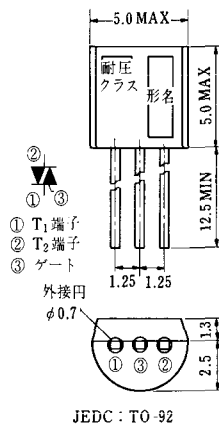


MT-2

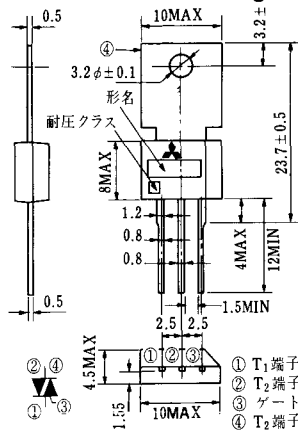

MT-3

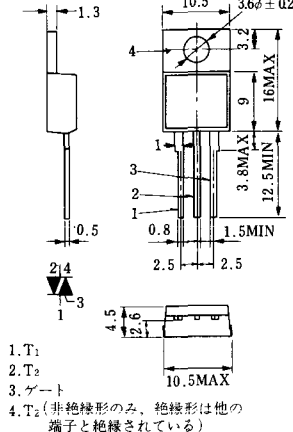

MT-4

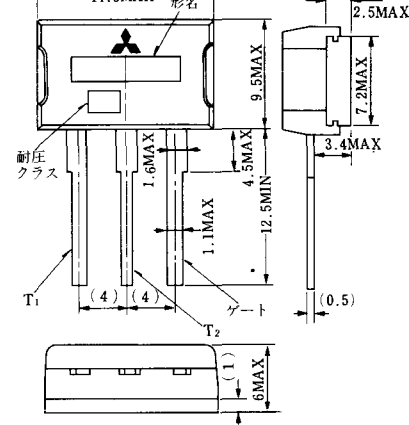


MT-5




MT-6




MT-7

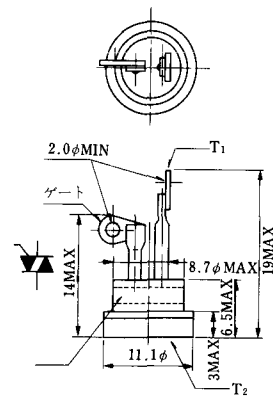


MT-8

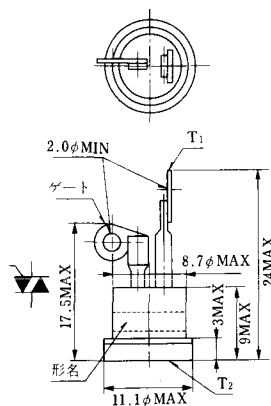


MT-9

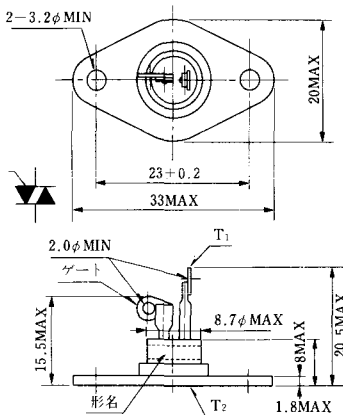


MT-10

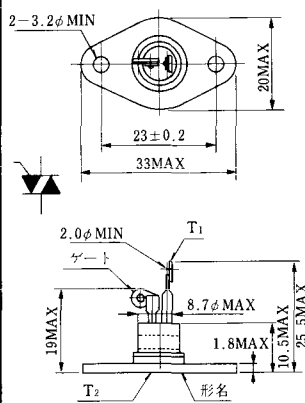


MT-11

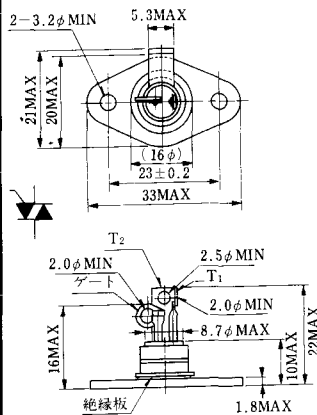


MT-12

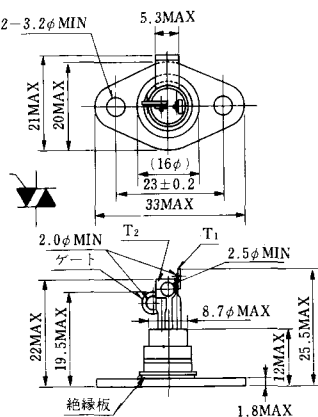


MT-13

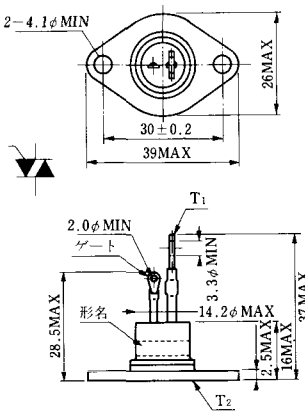

MT-14

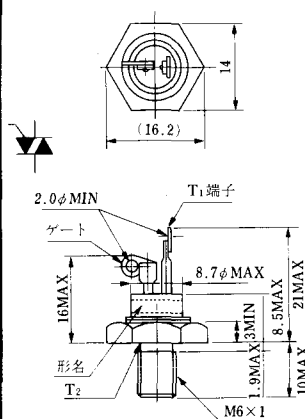

MT-15

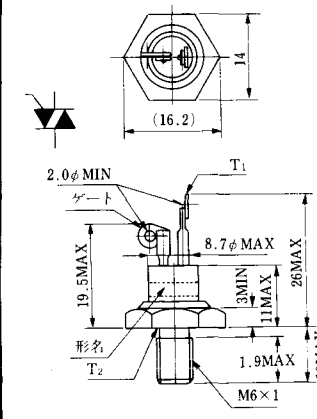

MT-16



MT-17



MT-18



MT-19




MT-20




MT-21




MT-22

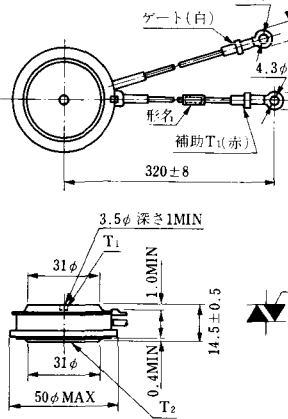

MT-23

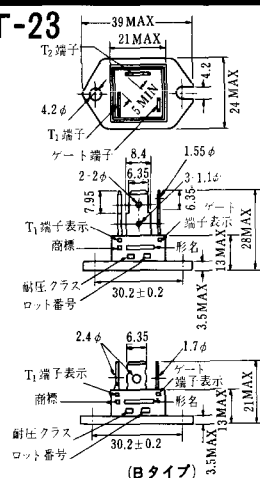

MT-24



TO - 3P

- ① T1 端子
- ② T2 端子
- ③ ゲート 端子
- ④ T2 端子

N-1



電極接続

- ① カソード
- ② ゲート
- ③ アノード

N-2



電極接続

- ① ヤート
- ② アノード
- ③ カソード


N-3



電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-4

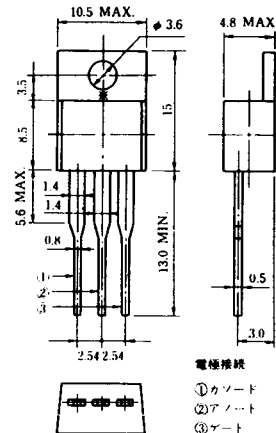


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5




N-6

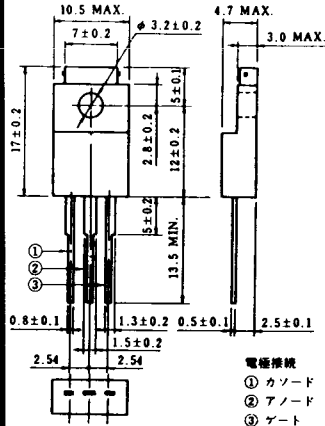


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

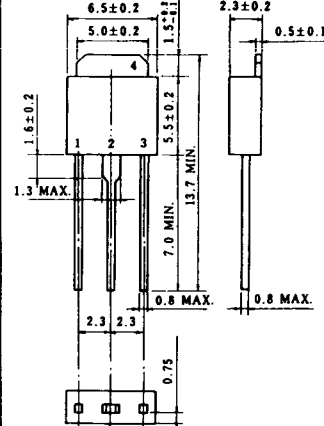

N-8

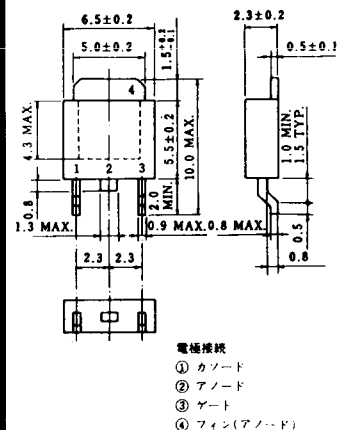

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9




電極接続

K : カソード

A : アノード

G : ゲート

NA-1

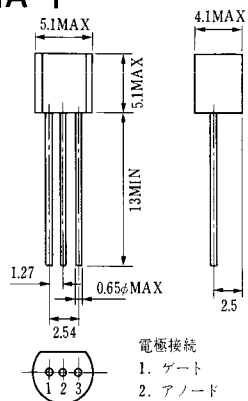

電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2



電極接続

1. カソード
2. アノード
3. ゲート

JEDEC: TO-202AA


NI-16

503PLF
503PLH



NI-17

3003PA




NI-18

353PGA「E



NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA



NI-23

1201PGA「E



NI-24


2001PGB^r JE



NI-25


NI-26

NT-1




電線接続
① T₁
② ゲート
③ T₂

NT-2




電線接続
① T₁
② ゲート
③ T₂

NT-3

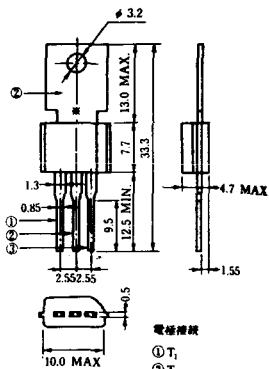


電線接続
① T₁
② T₂
③ ゲート

NT-4

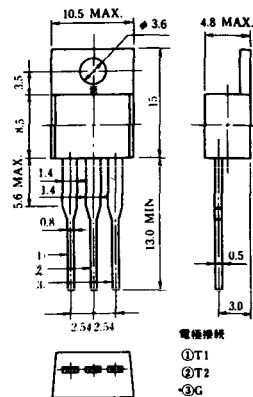


電線接続
① T₁
② T₂
③ G

NT-5

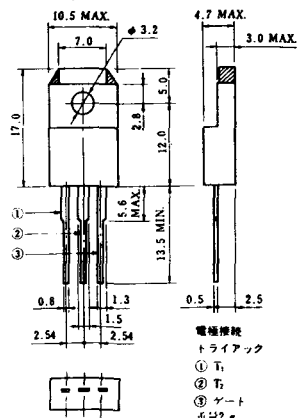


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-6

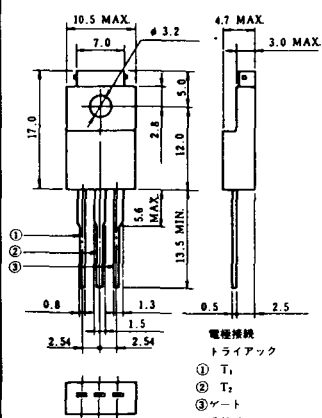


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-7

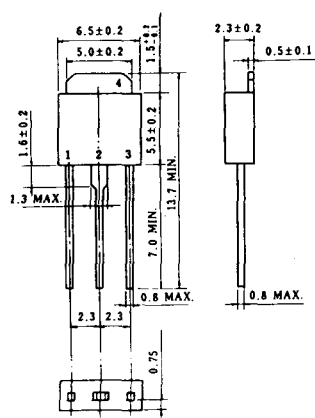

NT-8

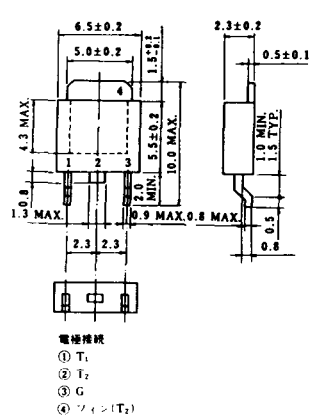


電線接続
① T₁
② T₂
③ G
④ T₁ (T₂)


SA-1




SA-2

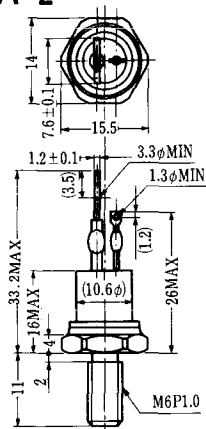


SA-3

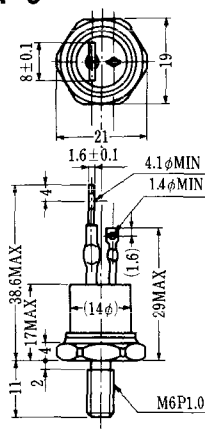


SA-4

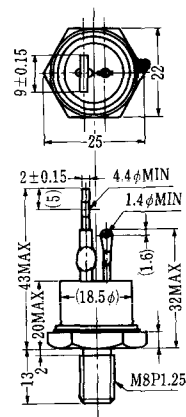

SA-5

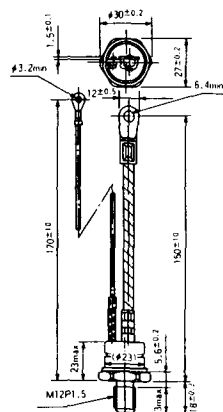


SA-6

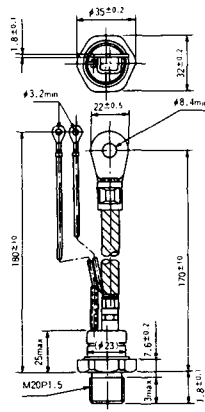


SA-7




SA-8

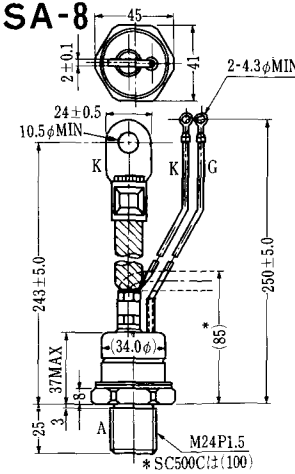


SA-9

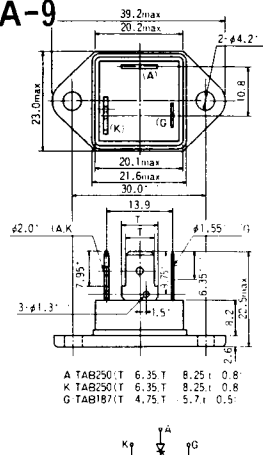


SA-10

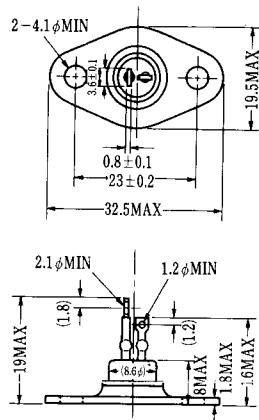


SA-11

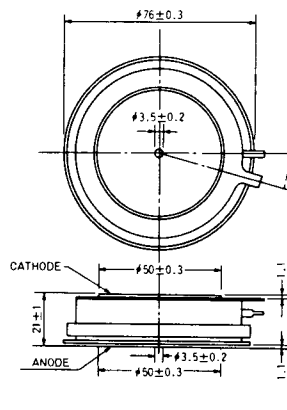

SA-12

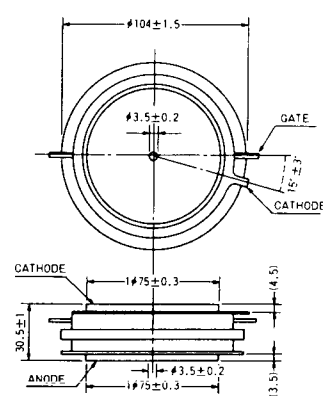

SAT-1

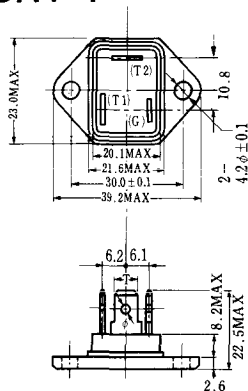


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)

SAT-2



SAT-3

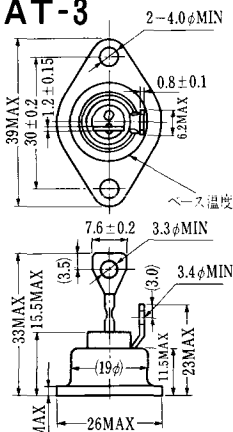

SAT-4



SAT-5



SAT-6




SAT-7



SAT-8




SAT-9.

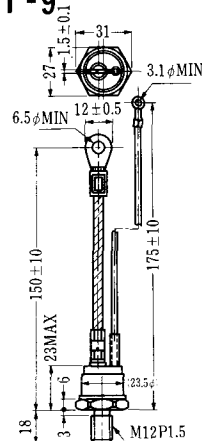


SAT-10




SAT-11

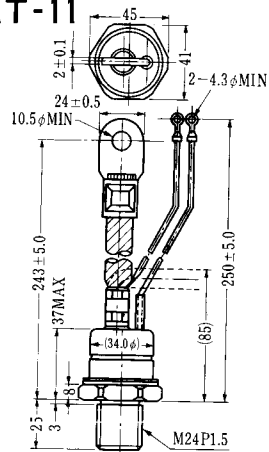


SY-1(1096A)



SY-2(1151)

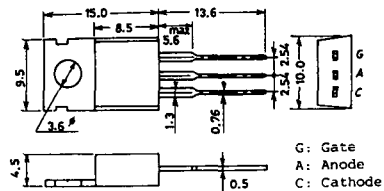

SY-3(1104)



SY-4(1150)



1097A



G: Gate

1102




1141



1142



1144

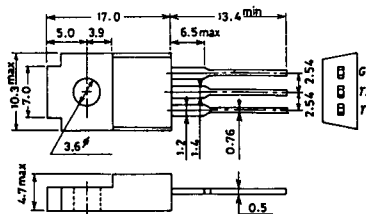

1155




1192A




G: Gate


T-1 (13-5A1A)

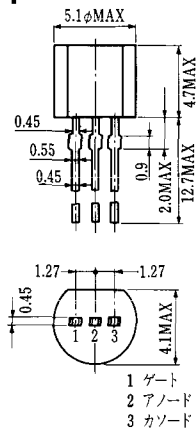

T-2 (13-8A1A)

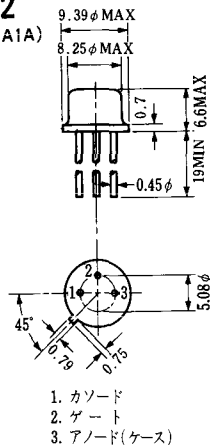


T-3 (13-8C1A)

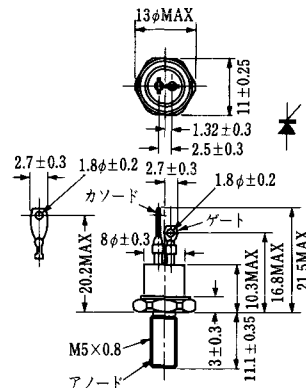


T-4 (13-10A1A)




T-5 (13-10B1A)

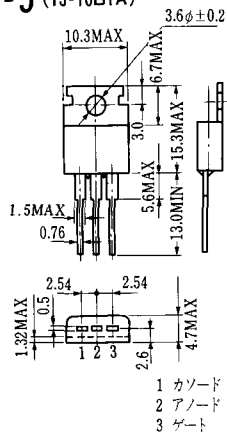


T-6 (13-11D1A)

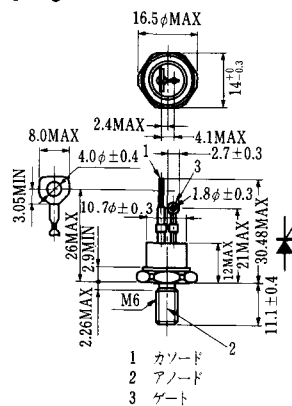

T-7 (13-13A1A)

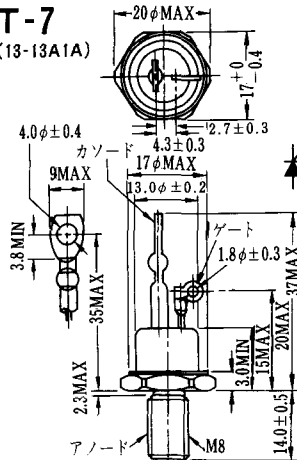

T-8 (13-13B1A)

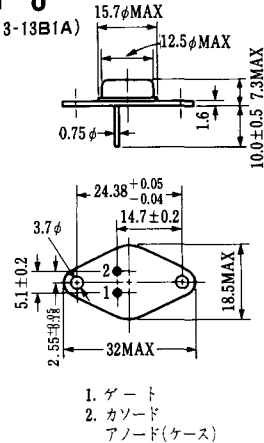

T-17 (13-42A1A)



T-18 (13-45D1A)




T-19 (13-52B1A)




T-20 (13-52C1A)



T-21 (13-60A1A)

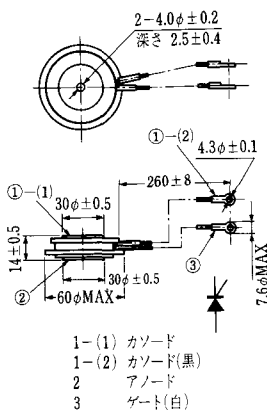

T-22 (13-70C1A)

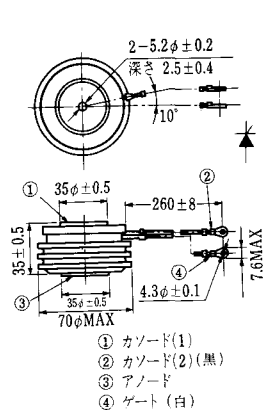

T-23 (13-78A1A)



T-24 (13-100C1A)



T-25 (13-120A2A)




T-26 (13-150A1A)




T-27 (13-37A1A)




T-28 (13-45E1A)

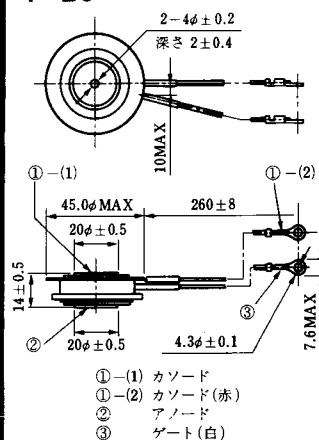


T-29 (13-51A1A)

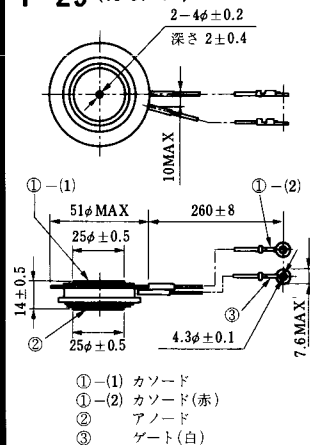


T-30 (13-57A1A)

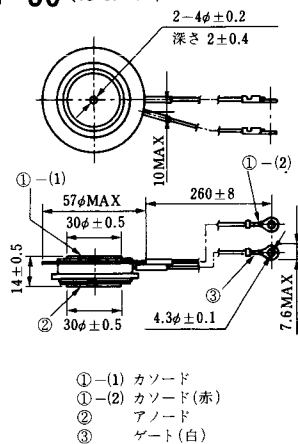

T-31 (13-100E1A)

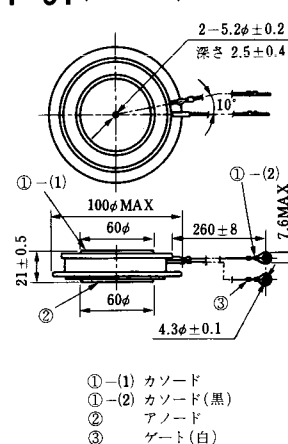

T-32 (13-60E3A)

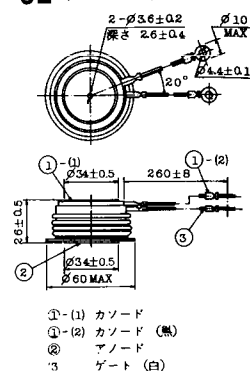


T-41 (13-28A2A)




T-42 (13-45F1A)



T-43 (13-60E2A)

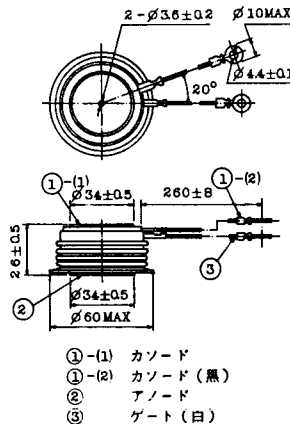

T-44 (13-36A1A)

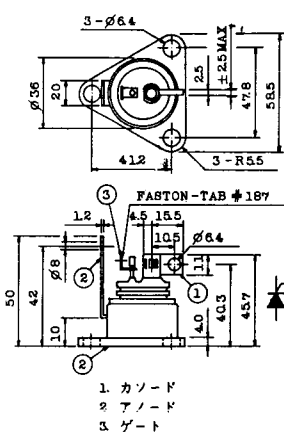


T-45 (13-51B1A)




T-46 (13-36B1A)




T-47 (13-60E1A)

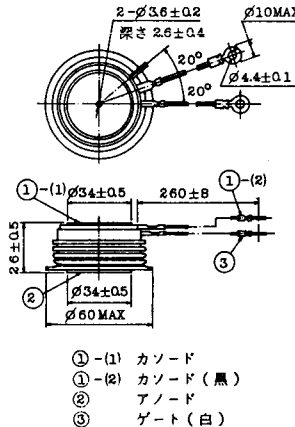

T-48 (13-93C1A)

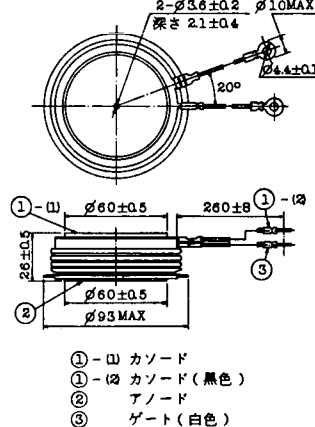


T-49 (13-75A1A)




- 1-(1) カソード
1-(2) カソード (黒)
2 アノード
3 ゲート (白)

T-50 (13-10A3A)




- 1 カソード
2 アノード
3 ゲート

T-51 (13-10D1A)




- 1 カソード
2 アノード
3 ゲート

T-52 (13-10D2A)




- 1 カソード
2 アノード
3 ゲート

T-53 (13-10E1B)




- 1 カソード
2 アノード
3 ゲート

T-54 (13-10F1B)




- 1 カソード
2 アノード
3 ゲート

T-55 (13-5A1D)



- 1 カソード
2 ゲート
3 アノード

T-56 (13-13C1A)




- 1 カソード
2 アノード
3 ゲート


TT-1




TT-2

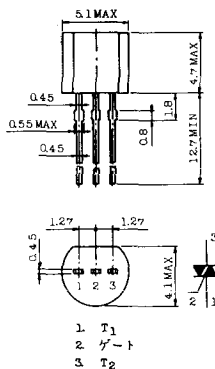


TT-3

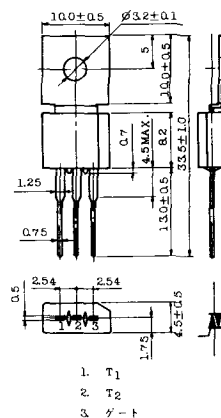


TT-4

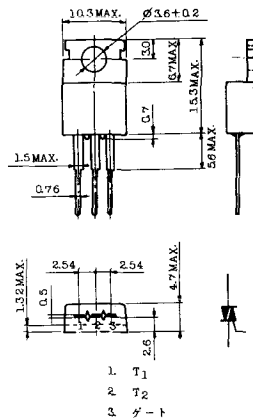


TT-5

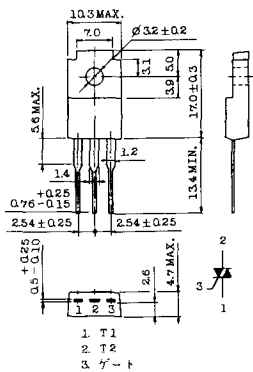


TT-6

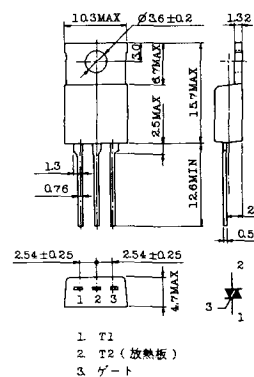

TT-7

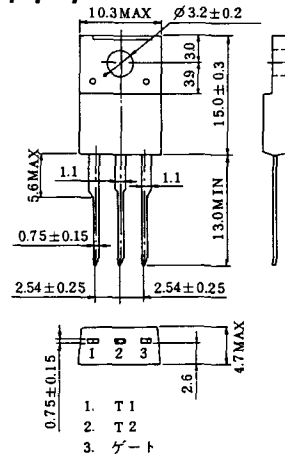

TT-8

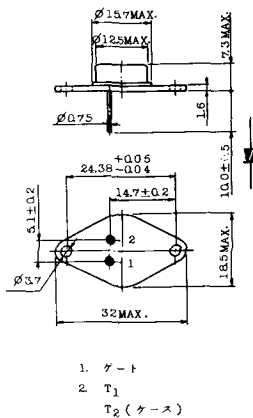

TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10



1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

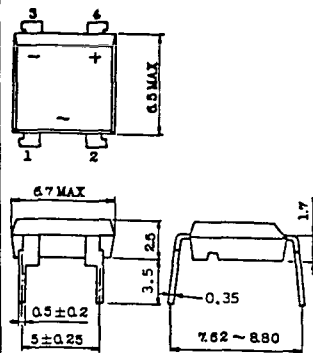


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

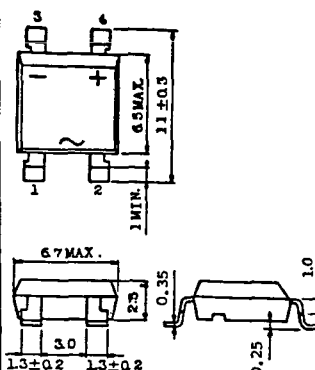


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)






1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)




1. T₁
2. T₂
3. ゲート

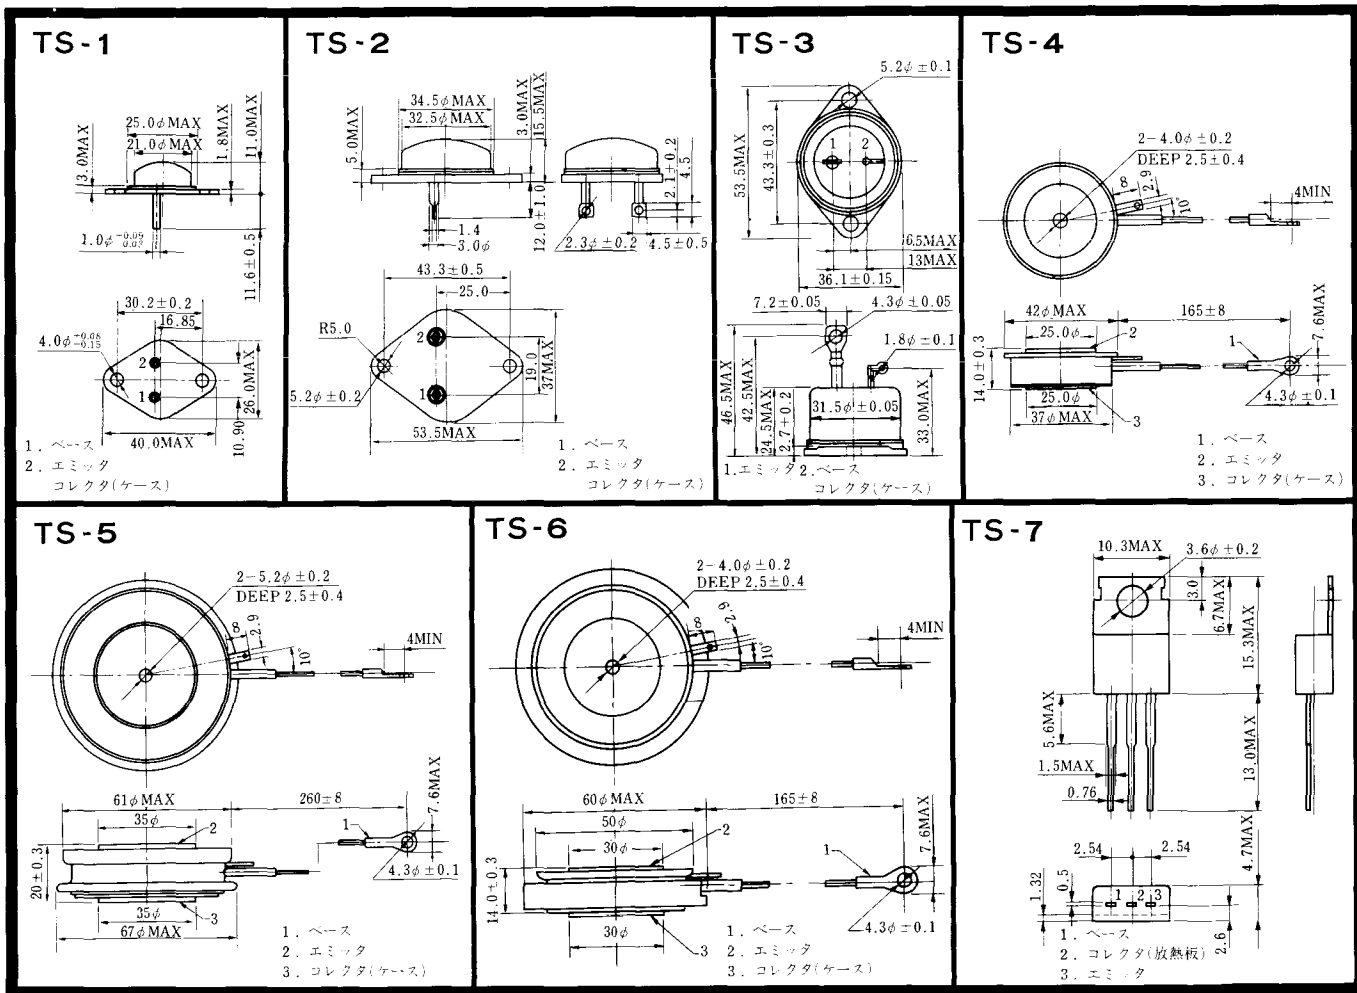





S-94B2A

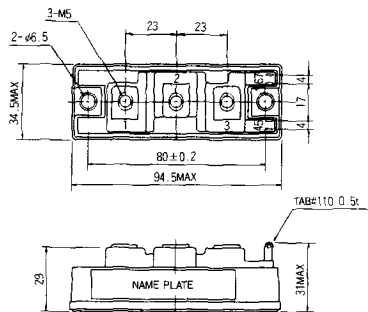


S-94D1A

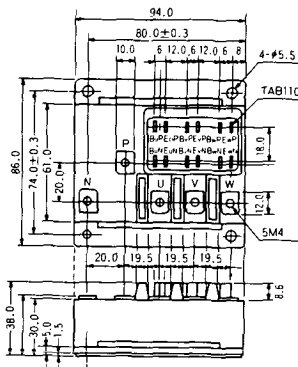


S-95A1A




S-95B1A

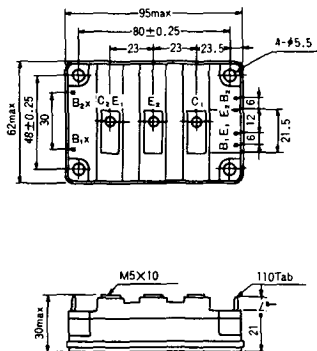

S-98B1B



S-108A2A




S-108B1A



S-108B1B



S-108B1C

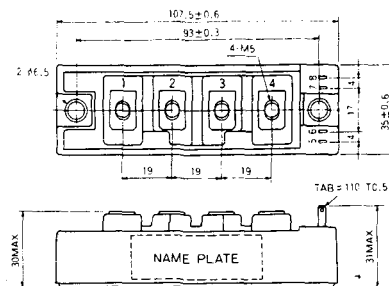

S-108B2A



S-108B2B



2-22B1A



2-27A4A




2-33C1A



2-33D1A



2-33F1A

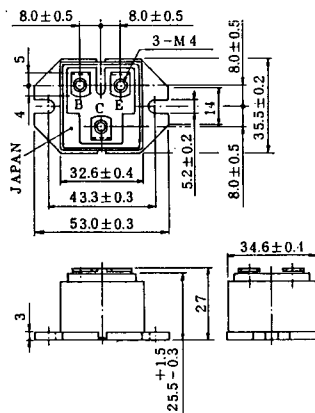

2-37A1A



2-48A3A



2-48A3B



2-48A4A




2-64A2A




2-64A2B




2-68A2A

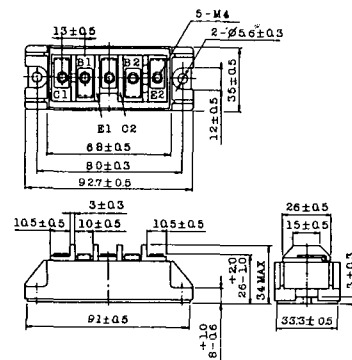


2-68B2A

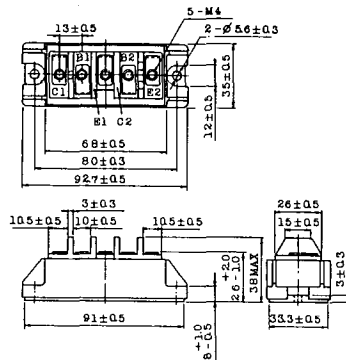


2-68C1A

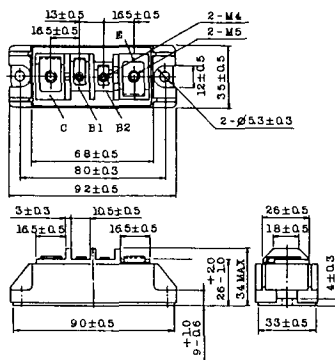


2-68D2A

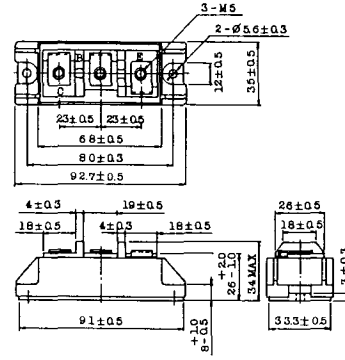


2-72A3A

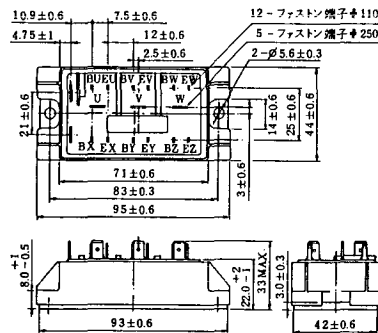


2-80A1A

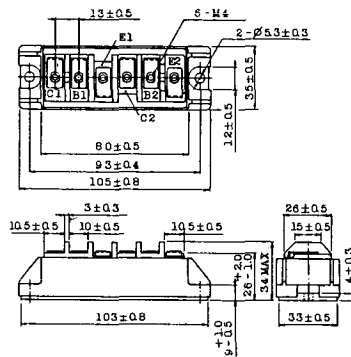


2-80B1A




2-80C1A

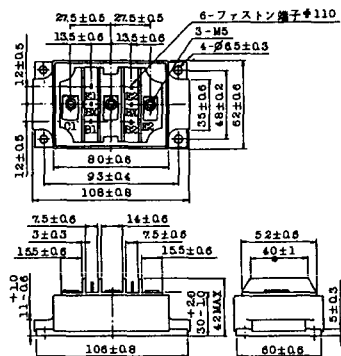


2-80D2A

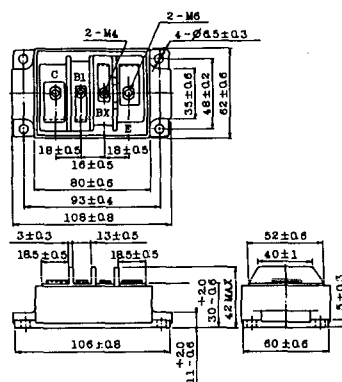


2-94A2A

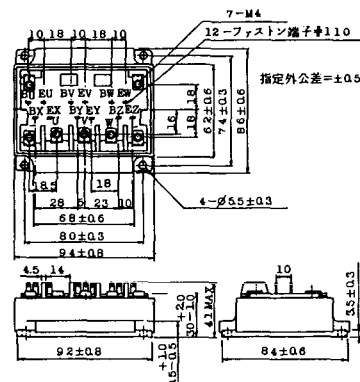


2-94B1A



2-94C2A

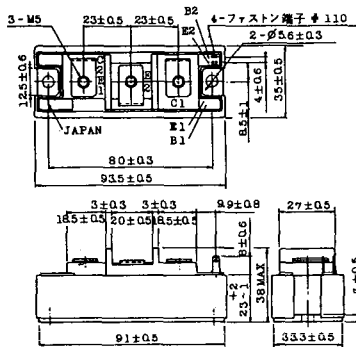


2-94C3A

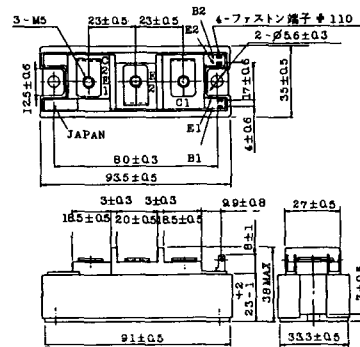


2-108B1A




2-109A3A

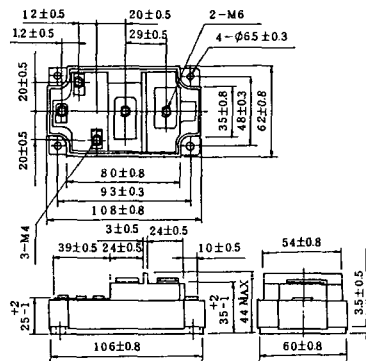


2-109A4A

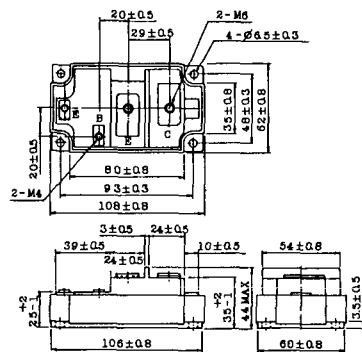

2-109B3A

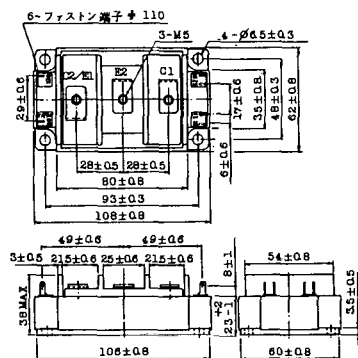


2-109B4A

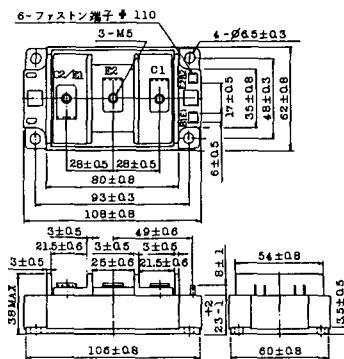


BBT-II

BBTII
1D200A-020



BBT-III

BBTIII
ETN31-055
ETN36-030
ETN36-030
ETN35-030

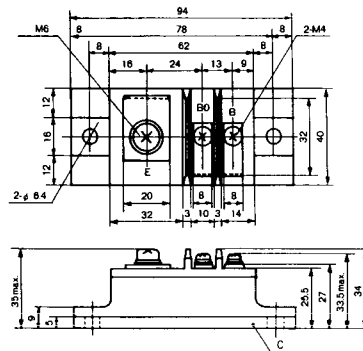


BBT-III






BBTIII
ETN01-055
ET1257



BBT-IV

BBTIV
1D500A-030

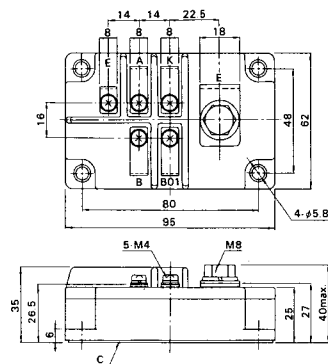

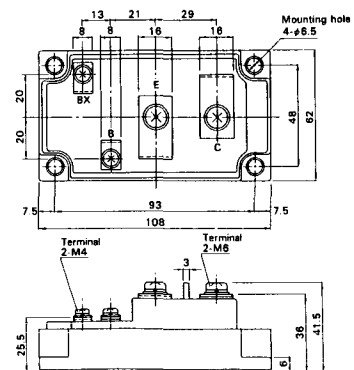

M-107




M-116




M-201




M-202

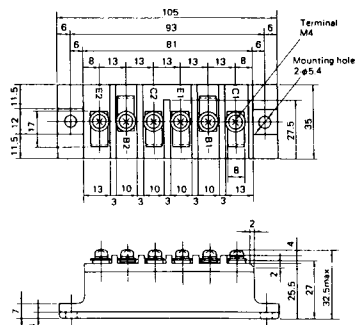


M-203

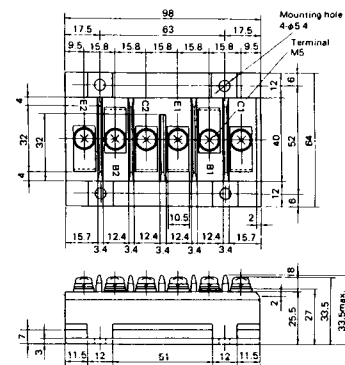


M-204

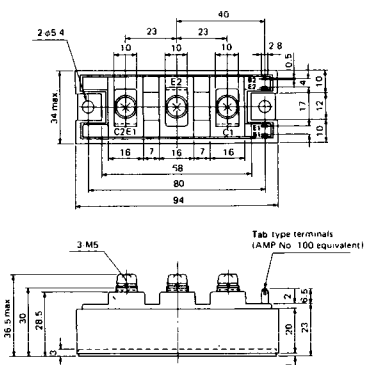

M-205

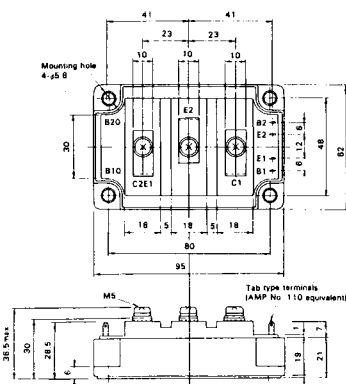


M-206

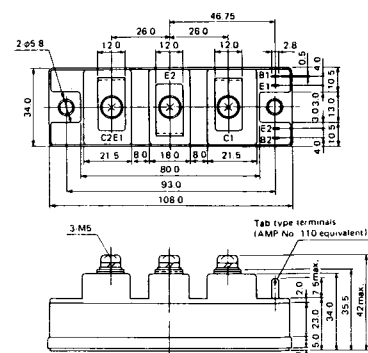


M-207



M-208

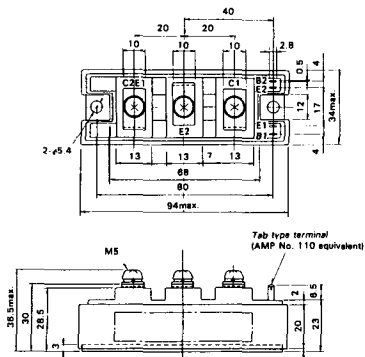

M-209

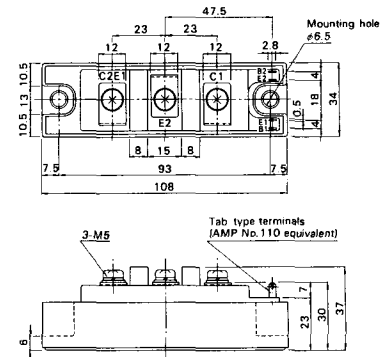


M-210





M-211




M-212






M-215


M-216



M-217



M-218



M-601



M-602



M-603




M-604




M-605



M-606



M-607



M-608




M-609




M-610




M-616




M-1A1A




M-2A1A




M-2B1A




M-2B2A



M-2C2A




M-2D4A

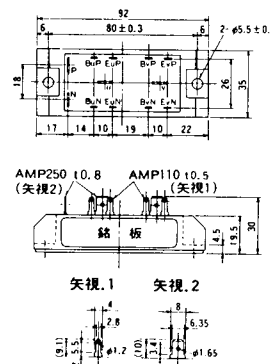

M-2E6A



M-2F6A



M-2G6A




M-3A1A




M-3B1A




M-3B1B

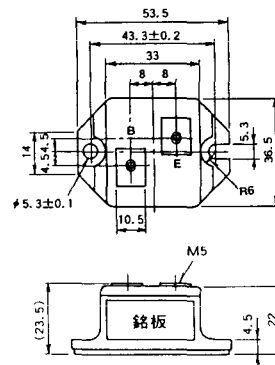


M-3C1A

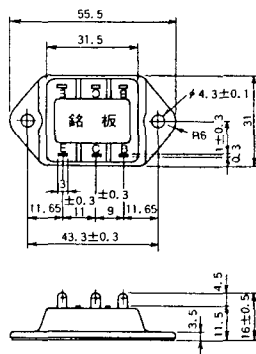

M-3D6A

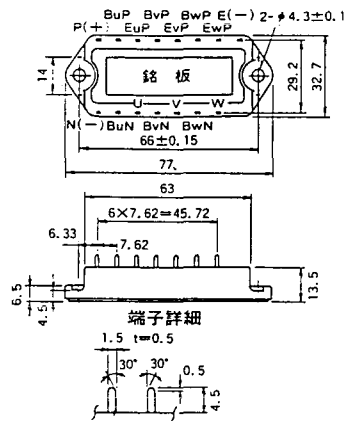


M-3E6A

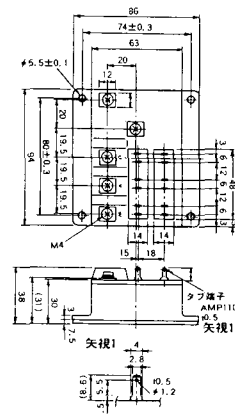


M-4A1A



M-4A2A



M-4A1B



M-4A2B



M-4B2A



M-5A1A



M-5A1B



M-5A2A



M-5B2A




M-5C2A



M-5D2A



M-6A1A

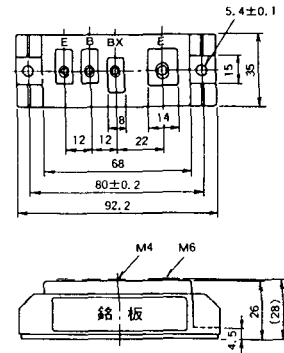

M-7A1A



M-7B1A




M-8A1A



M-8A1B



M-8A2A




M-8A2B




M-8B2A



M-9A1A




M-9A2A




M-9B1A




M-9C2A




M-1A1B

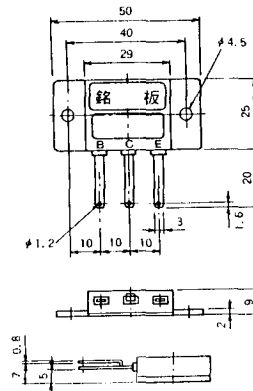


M-1A1C



M-2E6B

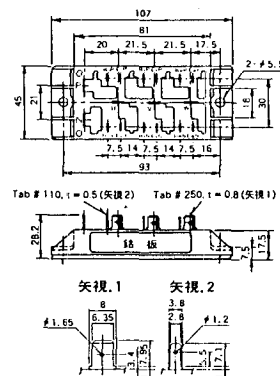


M-2E6C




M-10A2A



M-10A2B




M-11A2A

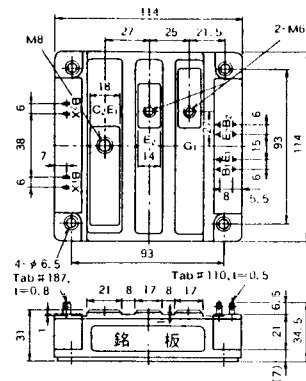


M-12A6A



M-12B6A



M-12B6B

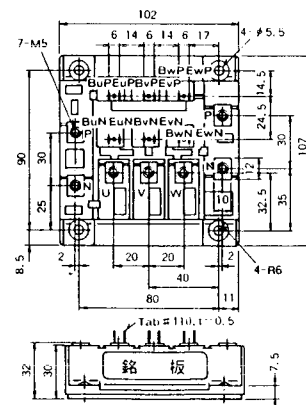

M-4A2D



M-4A2E




M-4C2A




M-4C2B



M-9B1C

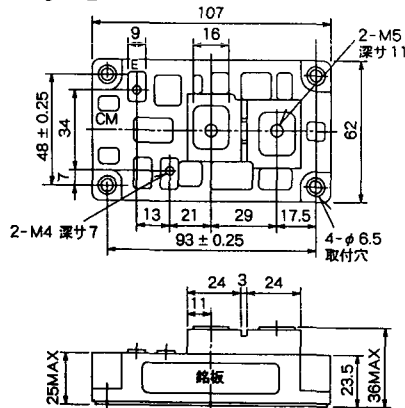

M-9D2A

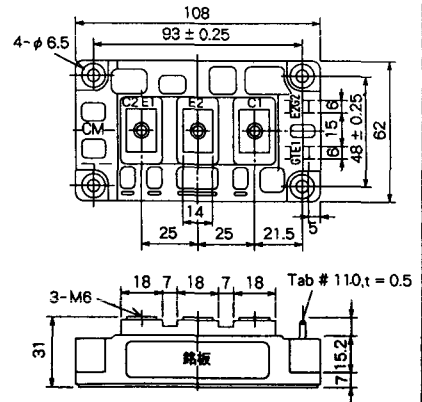

M-9D2B



M-10A2C



H-101




Weight : 480g

TERMINALS



LF-J

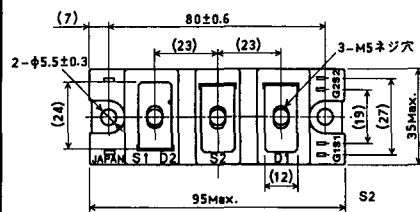


LF-K




U-1




U-2

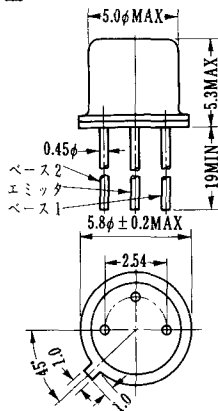


U-3

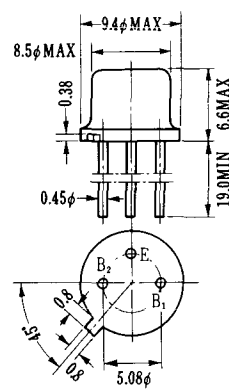

U-4

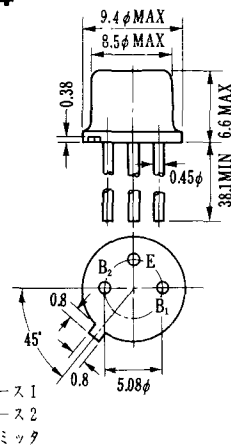


U-5

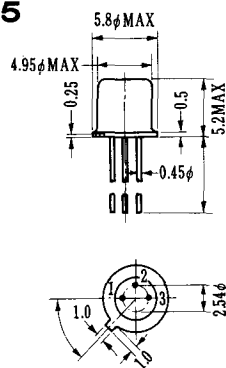


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

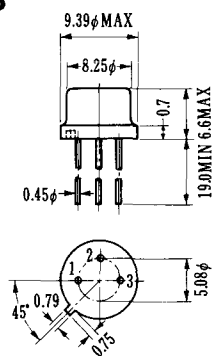

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

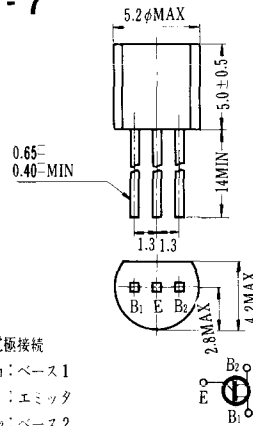

U-8

