

TECHNICAL DATA
DATA SHEET

220CNQ025 SCHOTTKY RECTIFIER




Applications:

- Parallel switching power supply • Free-Wheeling diodes • Reverse battery protection
- Converters • Redundant power subsystems

Features:

- 150°C T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Mechanical Dimensions: In Inches / mm

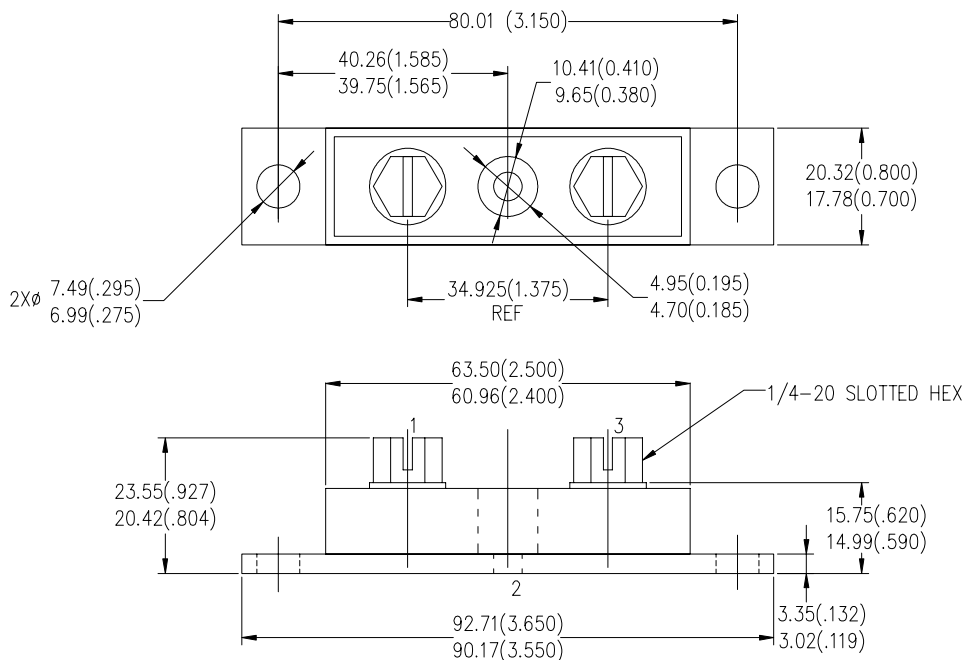

PRM4(Non-Isolated)

**Maximum Ratings:**



Characteristics	Symbol	Condition	Max.	Units
Peak Inverse Voltage	V_{RWM}	-	25	V
Max. Average Forward	$I_{F(AV)}$	50% duty cycle @ $T_C = 74^\circ\text{C}$,	220	A
Max. Peak One Cycle Non-Repetitive Surge Current (per leg)	I_{FSM}	8.3 ms, half Sine pulse	2850	A

Electrical Characteristics:

Characteristics	Symbol	Condition	Max.	Units
Max. Forward Voltage Drop (per leg)*	V_{F1}	@ 110A, Pulse, $T_J = 25^\circ\text{C}$	0.48	V
	V_{F2}	@ 110 A, Pulse, $T_J = 75^\circ\text{C}$	0.40	V
Max. Reverse Current (per leg)*	I_{R1}	@ $V_R = \text{rated } V_R$ $T_J = 25^\circ\text{C}$	10	mA
	I_{R2}	@ $V_R = \text{rated } V_R$ $T_J = 125^\circ\text{C}$	560	mA
Max. Junction Capacitance (per leg)	C_T	@ $V_R = 5\text{V}$, $T_C = 25^\circ\text{C}$ $f_{SIG} = 1\text{MHz}$	7400	pF
Typical Series Inductance (per leg)	L_S	Measured lead to lead 5 mm from package body	7.0	nH
Max. Voltage Rate of Change	dv/dt	-	10,000	V/ μs

* Pulse Width < 300 μs , Duty Cycle <2%**Thermal-Mechanical Specifications:**

Characteristics	Symbol	Condition	Specification		Units
Max. Junction Temperature	T _J	-	-55 to +150		°C
Max. Storage Temperature	T _{stg}	-	-55 to +150		°C
Maximum Thermal Resistance Junction to Case (per leg)	R _{θJC}	DC operation	0.40		°C/W
Maximum Thermal Resistance Junction to Case (per package)	R _{θJC}	DC operation	0.20		°C/W
Maximum Thermal Resistance, Case to Heat Sink	R _{θCS}	Mounting surface, smooth and greased	0.10		°C/W
Approximate Weight	wt	-	79		g
Mounting Torque	T _M	-	Mounting Torque Base	24 (min) 35 (max)	Kg-cm
			Mounting Torque Center Hole	13.5 (Typ)	
			Terminal Torque	35(min) 46 (max)	
Case Style	PRM4(Non-Isolated)				

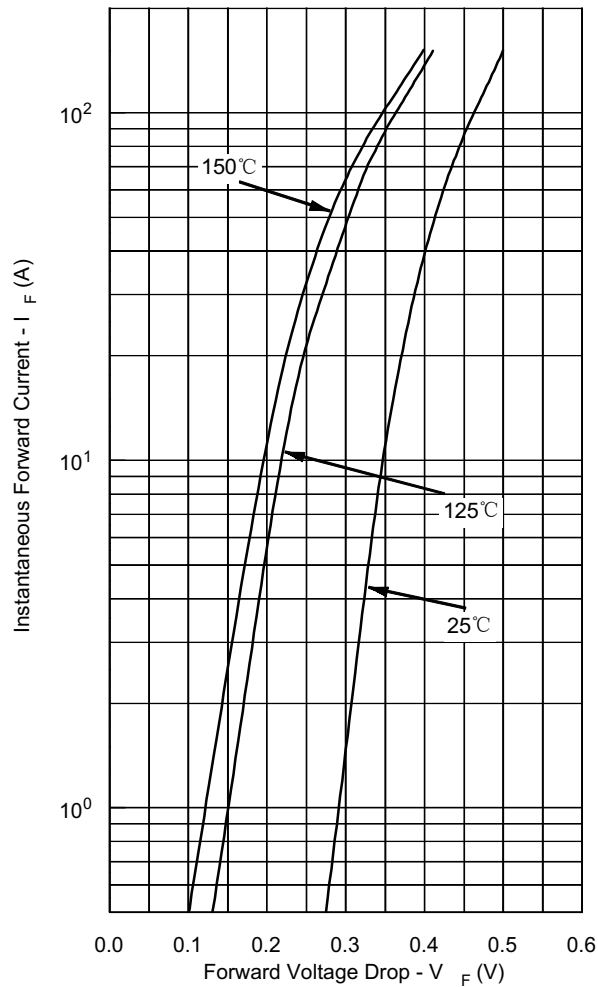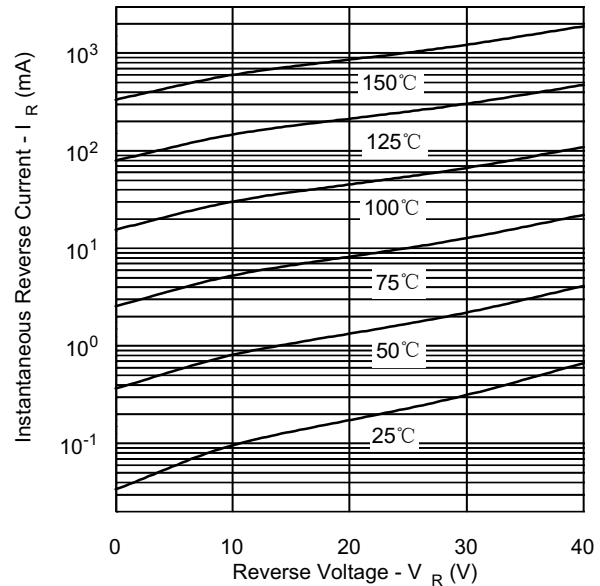**Typical Forward Characteristics****Typical Reverse Characteristics****Typical Junction Capacitance**