


トランジスタ・モジュール (NPN, ダーリントン接続, 4個/6個内蔵)


- ダーリントン・トランジスタを4個/6個内蔵
- フリーホイール・ダイオード付
- 電極と金属ケース部が絶縁されている
- ファストン端子による接続
- 直流電流増幅率は80以上(定格電流にて)

■等価回路

EL-1

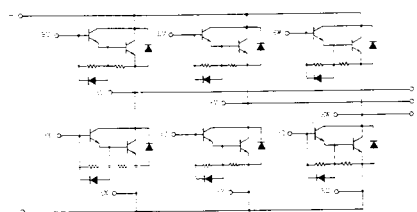


EL-2

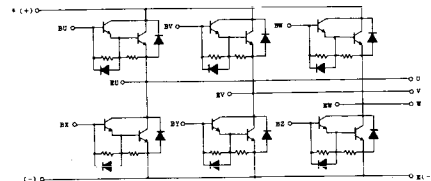

注1. $T_c = 25^\circ\text{C}$.

注2. AC, 1分間。

型 名	最 大 定 格 (T _a =25℃)											電 氣 的 特 性									
	V _{CE0}	V _{CEX(SUS)}	V _{EBO}	I _C	I _{CP}	I _B	I _F	I _{FM}	P _C	T _J	T _{stg}	V _{iso}	I _{CBO}	I _{EBO}	V _{CE0(SUS)}	h _{FE}					
	(V)	V _{CEO #}	(V)	(A)	(A)	(A)	(A)	(A)	(W)	(℃)	(℃)	(V)	(mA)	V _{CB}	(mA)	V _{EB}	(V)	I _C	h _{FE}	I _C	
		最大											(V)	最大	(V)	最小	最大	(V)	(A)		
MG15G4GL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG20G4GL1	600	600 #	6	20	40	2.0	20	40	125	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	20
MG10G6EL1	500	500	6	10	20	1.0	10	20	80	150	-40~125	2500	1.0	500	100	6	400	0.5	100	5	10
MG10G6EL2	600	600	6	10	20	1.0	10	20	80	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	10
MG10Q6EK1	1200	1200	7	10	20	1.0	10	20	100	150	-40~125	2500	1.0	1200	200	7	900	0.5	100	5	10
MG15G6EL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG15G6EL2	500	500	6	15	30	1.0	15	30	80	150	-40~125	2500	1.0	500	100	6	400	0.5	100	5	15
MG15H6EL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	500	0.5	100	5	15
MG15N6EK1	1100	1100	7	15	30	1.5	15	30	150	150	-40~125	2500	1.0	1100	200	7	900	1.0	100	5	15
MG20G6EL1	600	600	6	20	40	2.0	20	40	125	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	20
MG20G6EL2	600	600	6	20	40	2.0	20	40	100	150	-40~125	2500	1.0	600	100	6	400	0.5	100	5	20
MG20Q6EK1	1200	1200	7	20	40	2.0	20	40	200	150	-40~125	2500	1.0	1200	200	7	900	0.5	100	5	20
MG25N6EK1	1100	1100	7	25	50	2.5	25	50	300	150	-40~125	2500	1.0	1100	200	7	900	0.5	100	5	25
MG30G6EL1	600	600	6	30	60	3.0	30	60	250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G6EL2	600	600	6	30	60	2.0	30	60	200	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG50G6EL1	600	600	6	50	100	5.0	50	100	300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG75G6EL1	600	600	6	75	150	10	75	150	350	150	-40~125	2500	1.0	600	200	6	450	0.5	80	5	75
MG75H6EL1	600	600	6	75	150	10	75	150	350	150	-40~125	2500	1.0	600	200	6	500	0.5	80	5	75

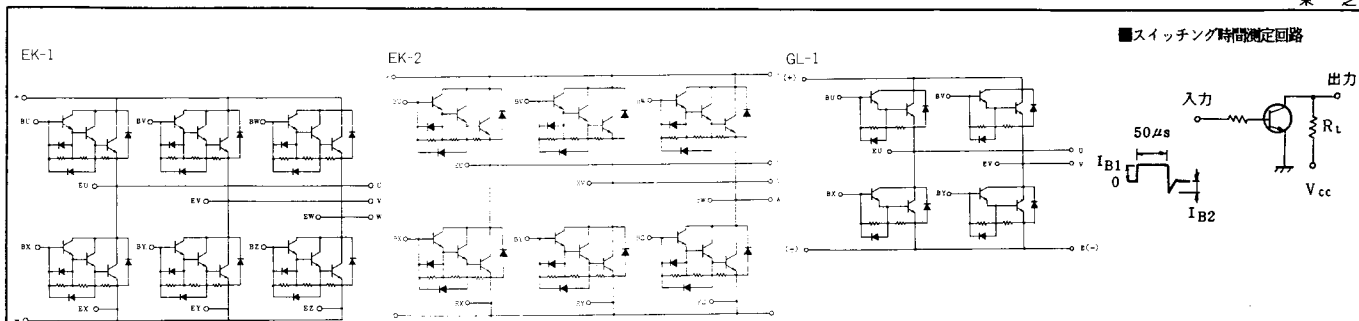

注3. スwitching時間の * 印はtyp.値.

(T _a = 25℃)											エミッタ・コレクタ間ダイオード						熱抵抗		等 価 回 路	外形図	記 事	型 名
飽和電圧 (V)		I _c (A)	I _B (A)	スイッチング時間 (μs)			I _{B1} (A)	I _{B2} (A)	V _{CC} (V)	R _L (Ω)	V _F (V)	t _{rr} (μs)			di/dt (A/μs)	R _{th(j-c)} (℃/W)						
V _{CE}	V _{BE}			t _{on}	t _{stg}	t _f						I _F	V _{BE}	トランジスタ部		ダイオード部						
最大	最大			最大	最大	最大						(A)	(A)	最大		最大	最大					
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-2	60	1.25		GL-1	2-48A3A	単相ブリッジ接続	MG15G4GL1
2.0	2.5	20	0.5	1	12	2	0.5	-0.5	300	15	1.6	20	0.7	20	-2	60	1.0		GL-1	2-48A3A	単相ブリッジ接続	MG20G4GL1
2.0	2.5	10	0.25	1	12	2	0.25	0.25	300	30	1.6	10	0.7	10	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG10G6EL1
2.0	2.5	10	0.3	1	12	2	0.3	-0.3	300	30	1.6	10	0.7	10	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG10G6EL2
2.5	3.5	10	0.2	2	14	6	0.2	-0.6	600	60	1.8	10	2.0	10	-3	60	1.25	3.6	EK-1	2-72A3A	三相ブリッジ接続	MG10G6EK1
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-2	60	1.25		EL-2	2-64A2A	三相ブリッジ接続	MG15G6EL1
2.0	2.5	15	0.4	1	10	3	0.4	-0.4	300	20	1.7	15	0.7	15	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG15G6EL2
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.7	15	0.7	15	-2	60	1.25	2.8	EL-2	2-64A2A	三相ブリッジ接続	MG15SH6EL1
2.5	3.5	15	0.3	2	11	6	0.3	-0.9	600	40	1.5	15	1.0	15	-3	60	0.83	1.3	EK-2	2-94B1A	三相ブリッジ接続	MG15N6EX1
2.0	2.5	20	0.5	1	12	2	0.5	-0.5	300	15	1.6	20	0.7	20	-2	60	1.0		EL-2	2-64A2A	三相ブリッジ接続	MG20G6EL1
2.0	2.5	20	0.5	1	10	3	0.5	-0.5	300	15	1.7	20	0.7	20	-2	60	1.25		EL-2	2-64A2A	三相ブリッジ接続	MG20G6EL2
2.5	3.5	20	0.4	2	14	6	0.4	-1.2	600	30	1.8	20	2.0	20	-3	60	0.625	1.8	EK-1	2-72A3A	三相ブリッジ接続	MG20G6EK1
2.5	3.5	25	0.5	2	14	6	0.5	-1.5	600	24	1.7	25	1.0	25	-3	100	0.41	1.3	EK-2	2-94B1A	三相ブリッジ接続	MG25N6EX1
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10	1.5	30	1.0	30	-3	100	0.5	1.8	EL-2	2-94A2A	三相ブリッジ接続	MG30G6EL1
2.0	2.5	30	0.6	1	12	3	0.6	-0.6	300	10	1.6	30	0.7	30	-2	60	0.625	1.8	EL-1	2-27A4A	三相ブリッジ接続	MG30G6EL2
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6	1.5	50	1.0	50	-3	100	0.41	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG50G6EL1
2.0	2.5	75	2.0	2	12	3	2.0	-2.0	300	4	1.7	75	1.0	75	-3	100	0.36	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG75G6EL1
2.0	2.5	75	2.0	2	12	4	2.0	-3.0	300	4	1.7	75	1.0	75	-3	100	0.36	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG75SH6EL1

FD-1



FD-2




FD-3




FD-4




FD-5

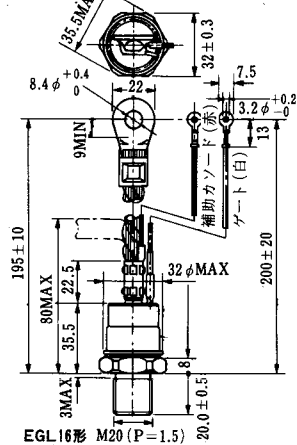


FD-6

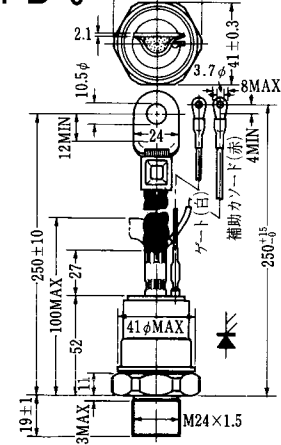

FD-7

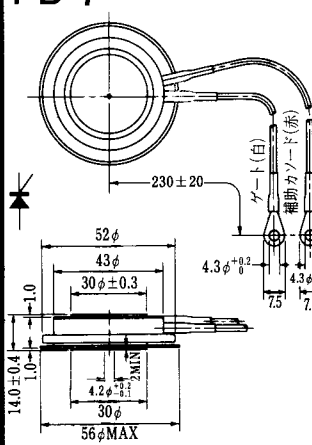


FD-8

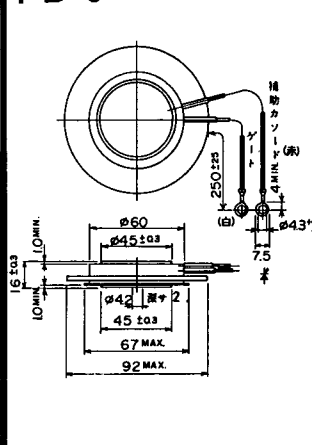

FD-9






FD-10

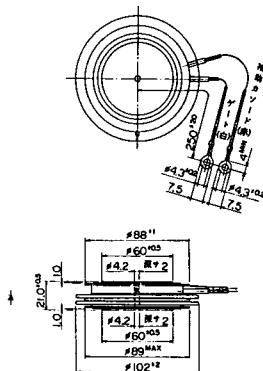


FD-11







FD-12

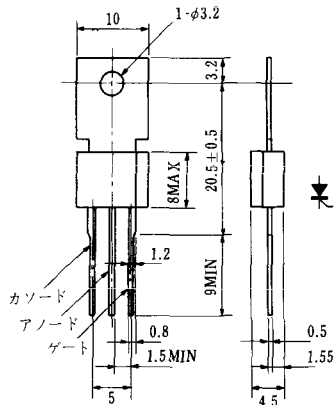

Unit in mm(inch)




Unit in mm(inch)

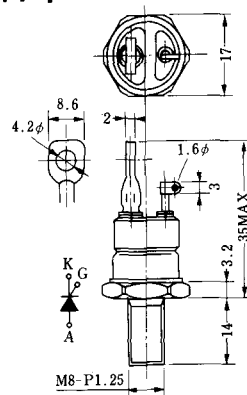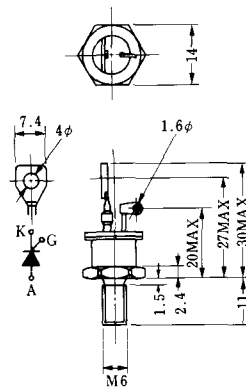


K_C

- ①アノード
②カソード
③ゲート

H-9A




H-9B




- ① アノード
- ② カソード
- ③ ゲート

H-10

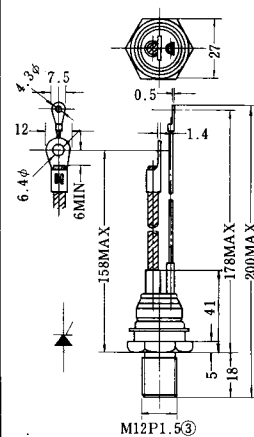


M12P1.5③

H-11

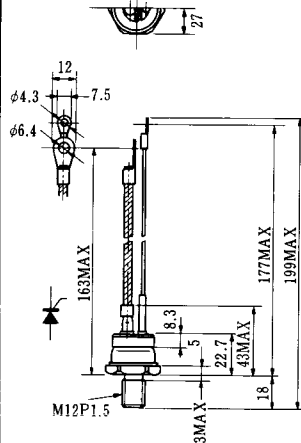


M12P1.5

H-12

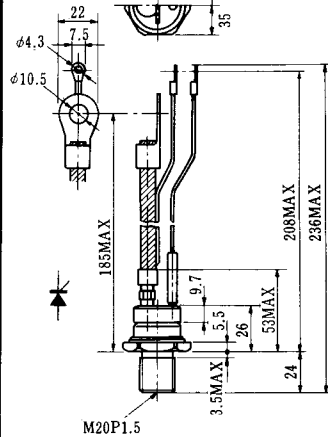


M20P1.5

H-13

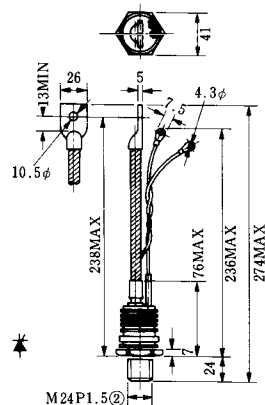


M24P1.5②

H-14




Unit in mm (inch)

H-15




Unit in mm (inch)

H-16

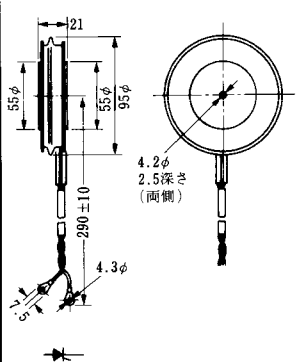

H-17

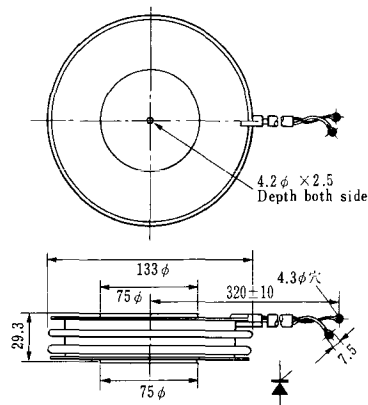

H-18



H-19



H-20



H-21



H-22




H-23



H-24



H-25

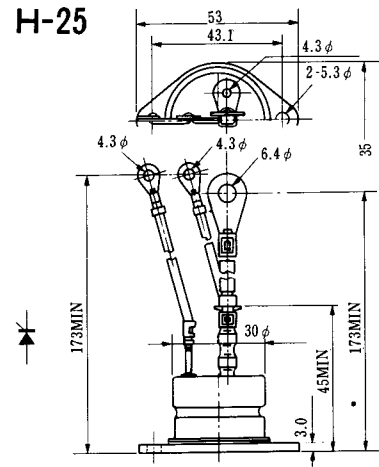

H-26




Type	Direction of polarity
CA12	

H-27



Type	Direction of polarity
CF11V	

H-28

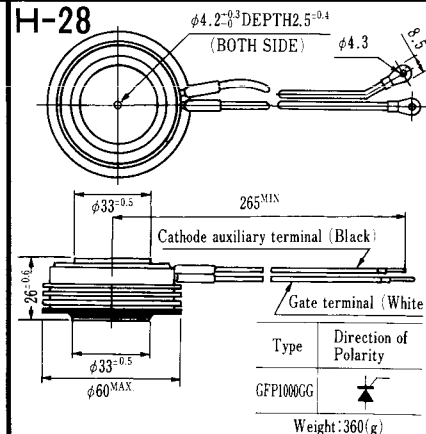

Note: The thickness is a dimension in press at the rated mounting force.

H-29



Note : The thickness is a dimension in press at the rated mounting force.

H-30



Note : The thickness is a dimension in press at the rated mounting force.

HT-1



Unit in mm (inch)

HT-2




HT-3



HT-4



HT-5

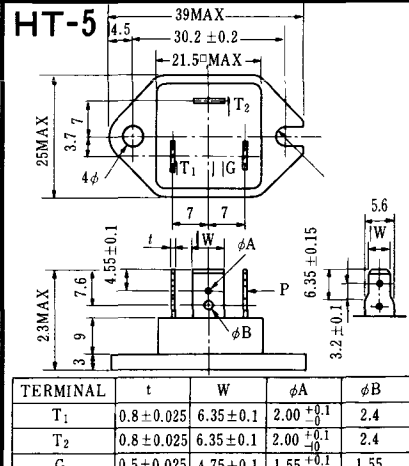


《寸法図単位：mm》

M-1




M-2

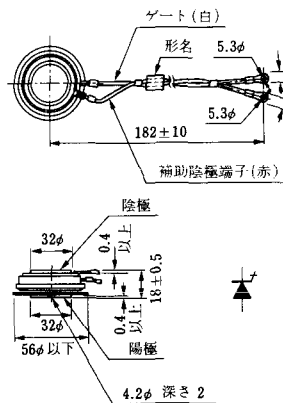


M-3



M-4

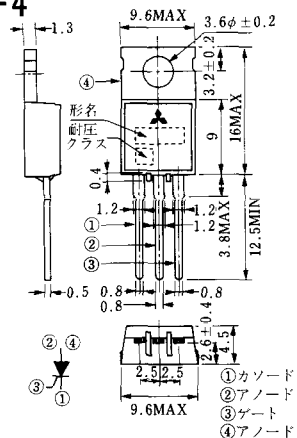


M-5

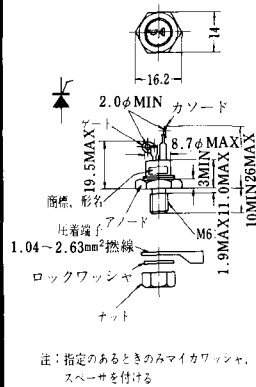


M-6



M-7

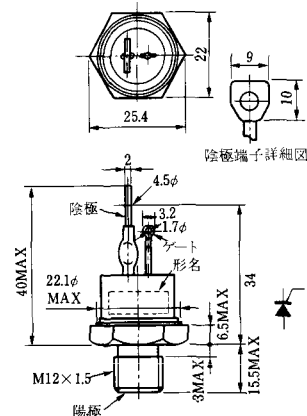

M-8

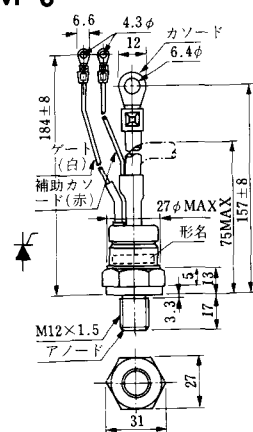


M-9



M-10



M-11

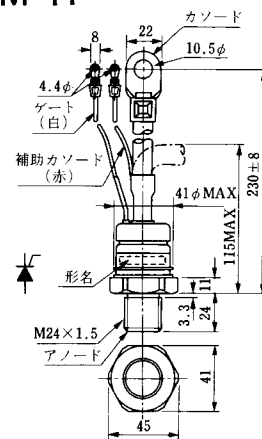

M-12




M-13



M-14



M-15

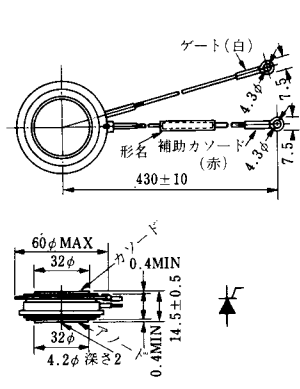

M-16



M-17



M-18



M-19




M-20



M-21



M-22

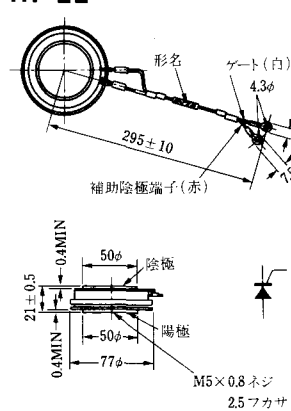

M-23



M-24



M-25




M-26



M-27



M-28

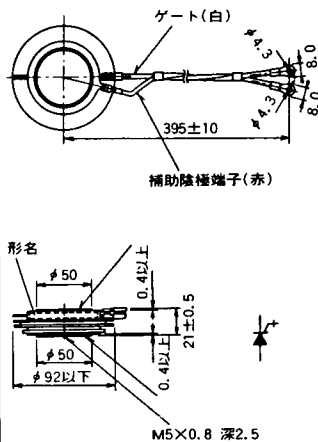

M-29



M-30



M-31



M-32



M-33




M-34




MT-1




MT-2

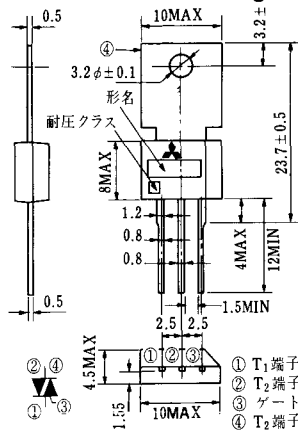

MT-3

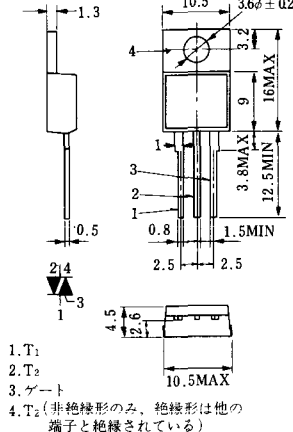

MT-4

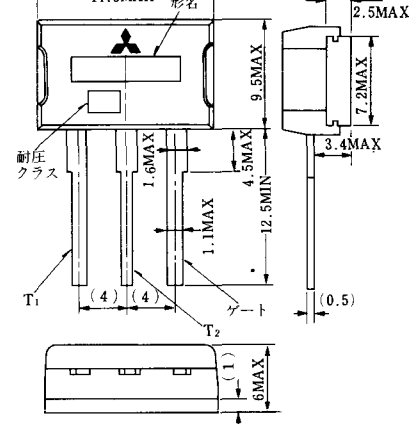


MT-5




MT-6




MT-7

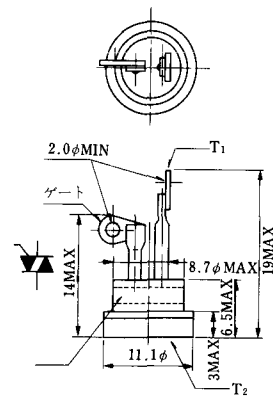


MT-8

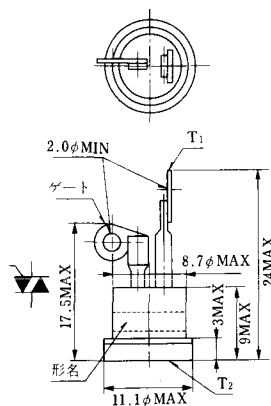


MT-9

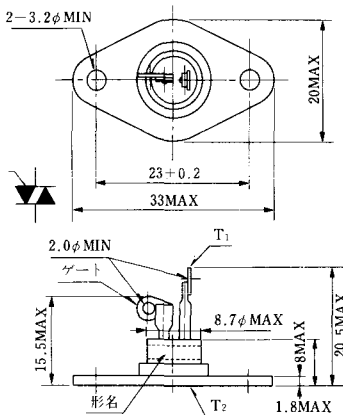


MT-10

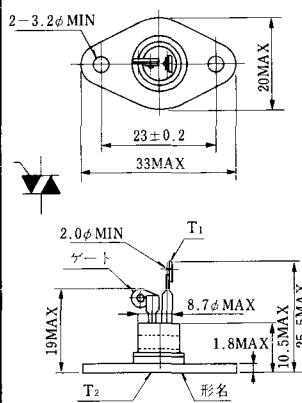


MT-11

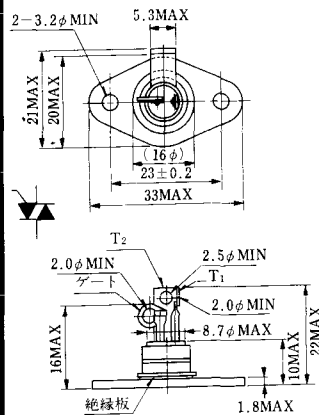


MT-12

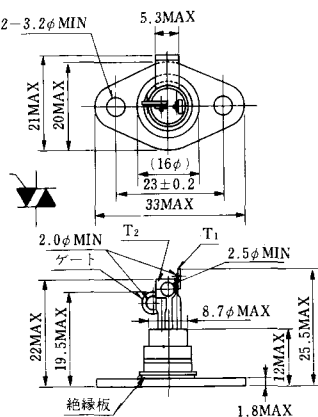


MT-13

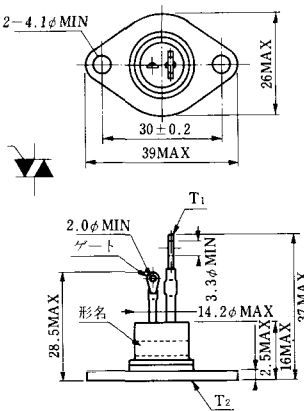

MT-14

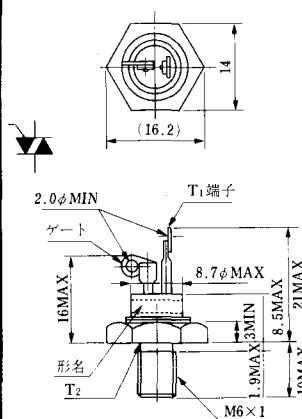

MT-15

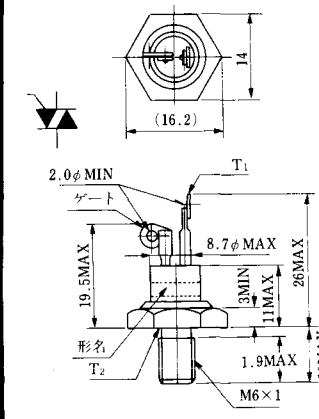

MT-16



MT-17



MT-18



MT-19




MT-20



MT-21



MT-22

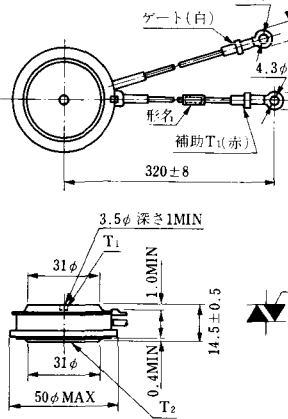

MT-23



MT-24



- ① T1 端子
 - ② T2 端子
 - ③ ゲート 端子
 - ④ T2 端子
- TO - 3P

N-1



電極接続

- ① カソード
- ② ゲート
- ③ アノード

N-2



電極接続

- ① ヤート
- ② アノード
- ③ カソード


N-3



電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-4

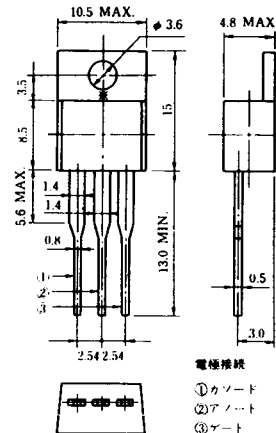


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5




N-6

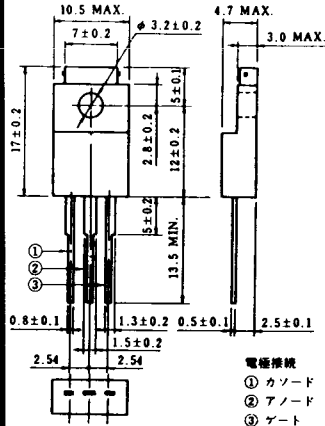


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

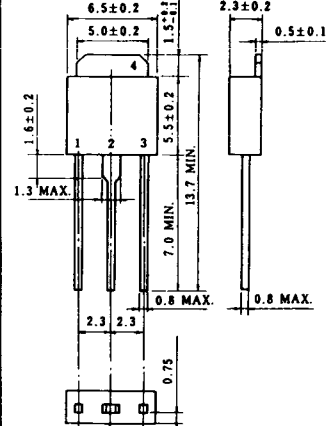

N-8

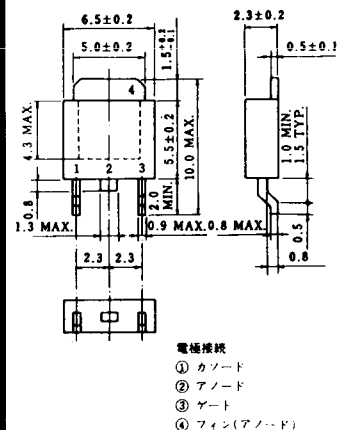

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9



電極接続

K : カソード

A : アノード

G : ゲート

NA-1



電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2




電極接続

1. カソード
2. アノード
3. ゲート

JEDEC: TO-202AA


NI-9

259RW
309RW

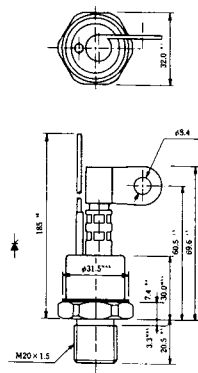


NI-10

259RW_JL
309RW_JL

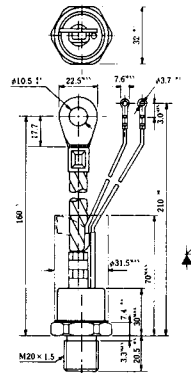

NI-11


103PA
253PA
503PA
553PA
803PA
103PLE
103PLG
103PLH
203PLG
253PLE
253PLH
353PLG
403PLE
403PLH



型名	103PA, 103PLE, 103PLG, 103PLH	253PA, 203PLG, 253PLE, 253PLH	503PA, 553PA, 353PLG, 403PLE, 403PLH	803PA
寸法				
A	40	46	55.5	55.5
B	16	22	30	32
C	36	42	50.5	50.5


NI-12

403PAB
503PAB
503PLB




NI-13

1003PA
1003PAB
1003PLF
1003PLH
1503PA




NI-14

358RGA



NI-15

359RGA




NI-16

503PLF
503PLH



NI-17

3003PA




NI-18

353PGA「J」E




NI-19

603PGA, 603PGA「J」A, 803PGA




NI-20

603PGA「J」E




NI-21

1001PGB「J」E




NI-22

1201PGA, 1201PGA「J」A, 1401PGA



NI-23

1201PGA「J」E



NI-24

2001PGB^r JE



NI-25

NI-26

NT-1



電極接続
① T_1
② ゲート
③ T_2

NT-2



電極接続
① T_1
② ゲート
③ T_2

NT-3




電極接続
① T_1
② T_2
③ ゲート

NT-4




電極接続
① T_1
② T_2
③ G

NT-5

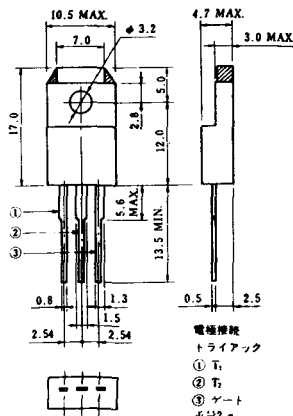


電極接続
トリアック
① T_1
② T_2
③ ゲート
※ 2g

NT-6

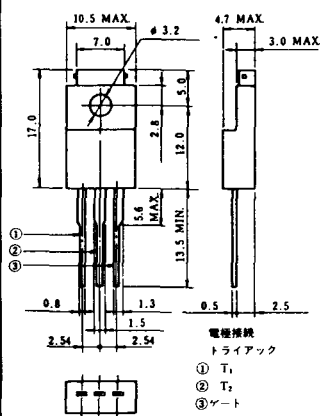


電極接続
トリアック
① T_1
② T_2
③ ゲート
※ 2g

NT-7

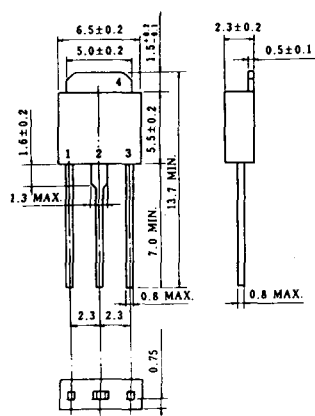

NT-8

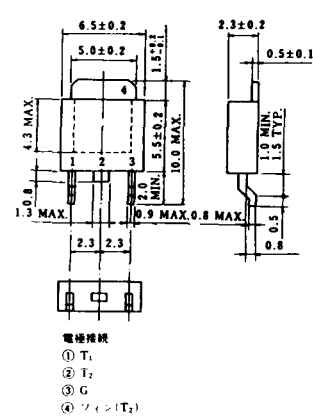

電極接続
① T_1
② T_2
③ G
④ T_1 (T_2)

S-1




ST-1




SA-1




SA-2

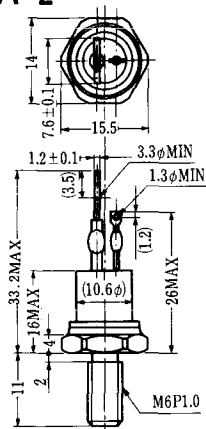


SA-3

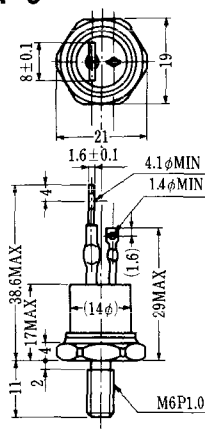


SA-4

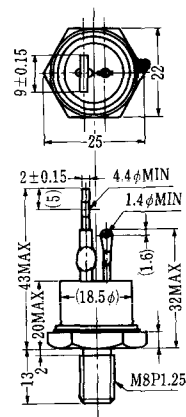

SA-5

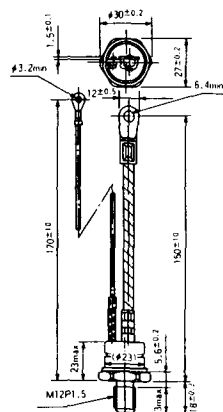


SA-6

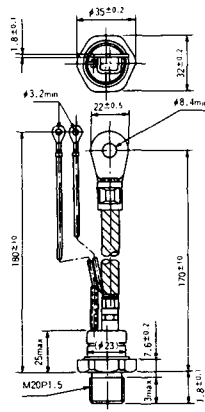


SA-7



SA-8

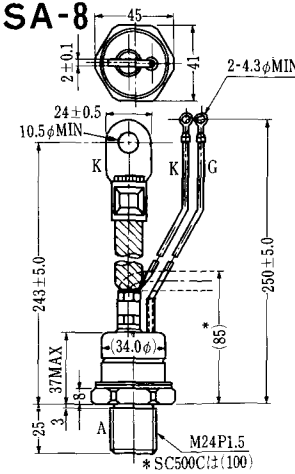

SAT-1

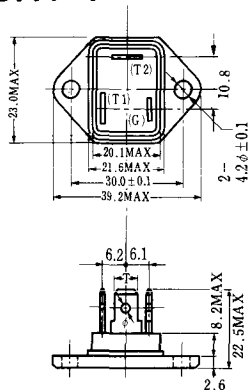


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)

SAT-2



SAT-3

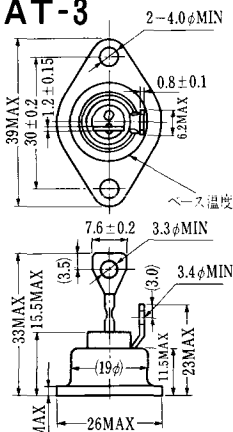

SAT-4



SAT-5



SAT-6




SAT-7



SAT-8




SAT-9.

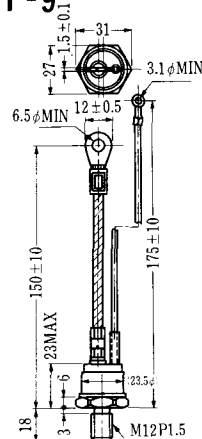

SAT-10




SAT-11

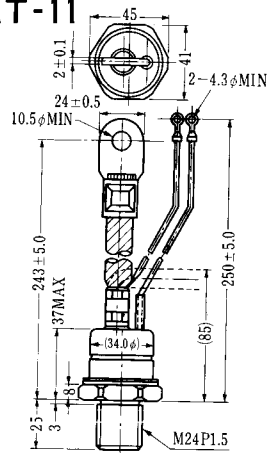


SY-1(1096A)



SY-2(1151)

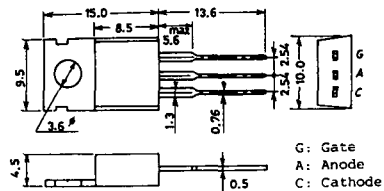

SY-3(1104)



SY-4(1150)



1097A



G: Gate

1102




1141




1142




1144

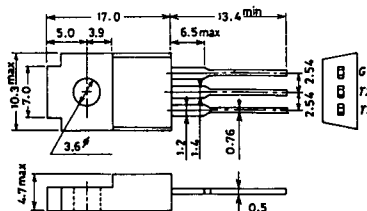

1155

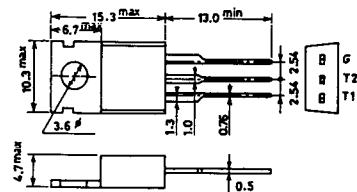

1192A




G: Gate


T-1 (13-5A1A)



T-2 (13-8A1A)

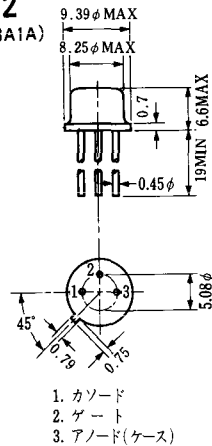

T-3 (13-8C1A)

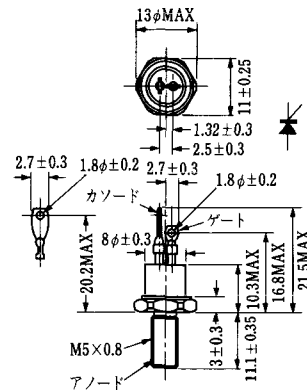


T-4 (13-10A1A)



T-5 (13-10B1A)




T-6 (13-11D1A)

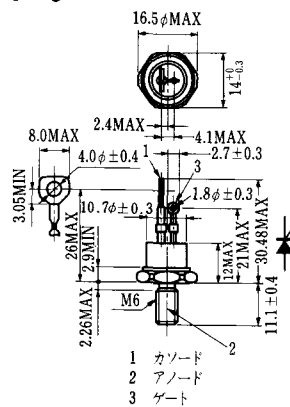

T-7 (13-13A1A)



T-8 (13-13B1A)

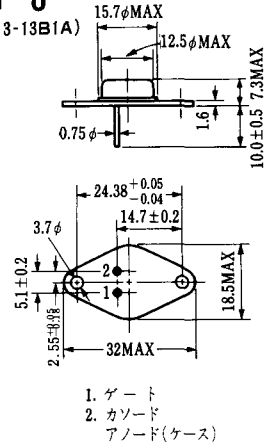

T-17 (13-42A1A)



T-18 (13-45D1A)




T-19 (13-52B1A)




T-20 (13-52C1A)




T-21 (13-60A1A)

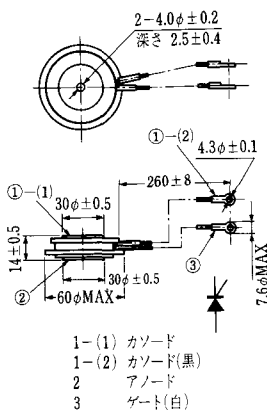

T-22 (13-70C1A)

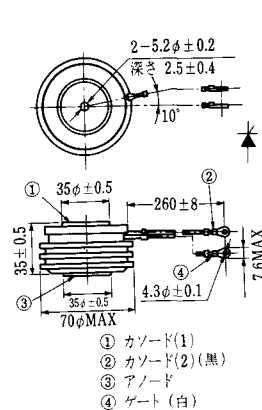

T-23 (13-78A1A)

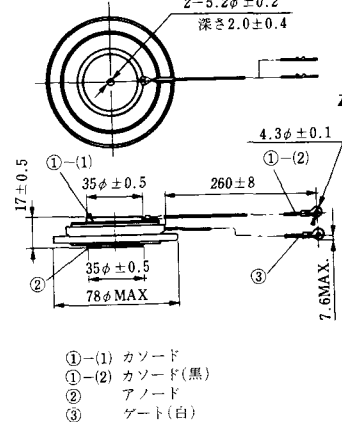

T-24 (13-100C1A)



T-25 (13-120A2A)




T-26 (13-150A1A)




T-27 (13-37A1A)




T-28 (13-45E1A)

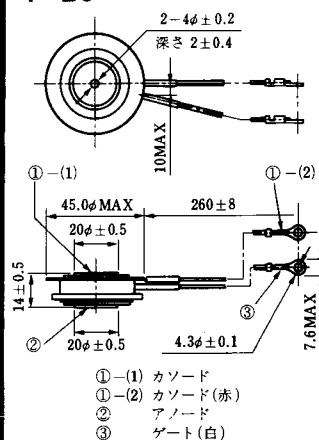


T-29 (13-51A1A)

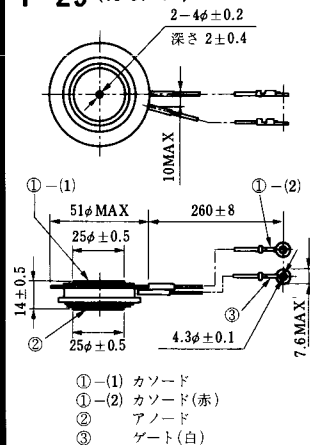


T-30 (13-57A1A)

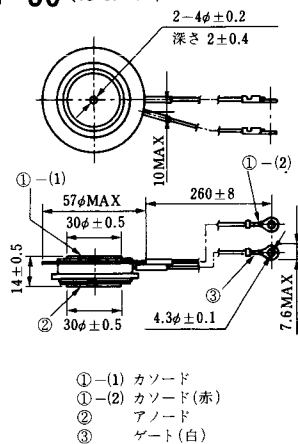


T-31 (13-100E1A)

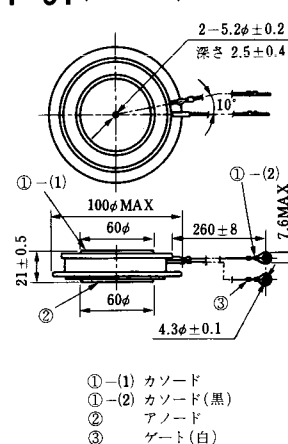

T-32 (13-60E3A)

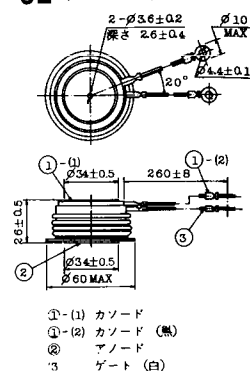


T-33 (13-78B1A)




- ① カソード
② アノード
③ ゲート

T-34 (13-66A1A)

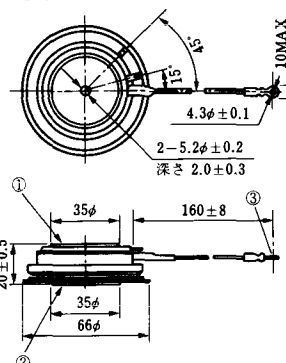


- ① カソード
② アノード
③ ゲート

T-35 (13-100D1A)

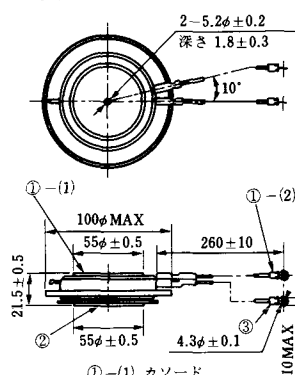


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-36 (13-120E1A)

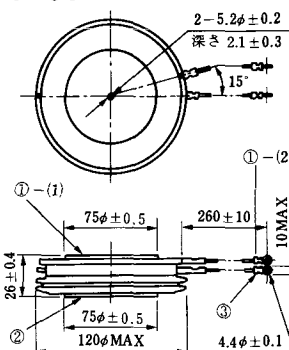


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-37 (13-120A1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-38 (13-120C1A)




- ① カソード
② アノード
③ ゲート

T-39 (13-80B1A)



- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-40 (13-28A1A)

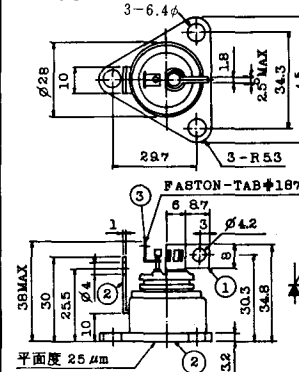

1. カソード
2. アノード
3. ゲート


T-41 (13-28A2A)




T-42 (13-45F1A)



T-43 (13-60E2A)

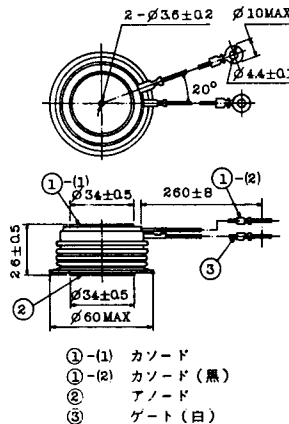

T-44 (13-36A1A)

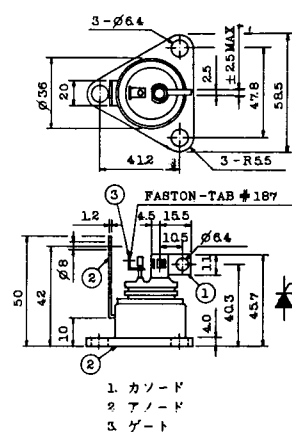


T-45 (13-51B1A)




T-46 (13-36B1A)




T-47 (13-60E1A)

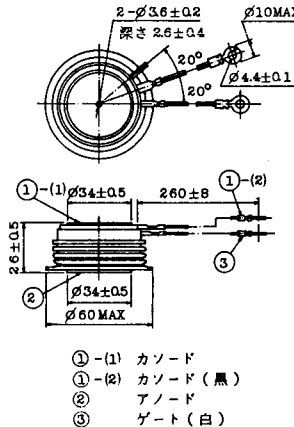

T-48 (13-93C1A)

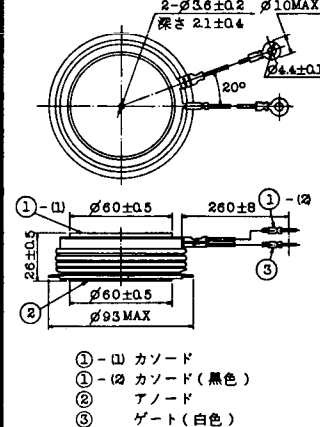


T-49 (13-75A1A)




- 1 ①-(1) カソード
1 ①-(2) カソード (黒)
2 アノード
3 ゲート (白)

T-50 (13-10A3A)




- 1 カソード
2 アノード
3 ゲート

T-51 (13-10D1A)




- 1 カソード
2 アノード
3 ゲート

T-52 (13-10D2A)




- 1 カソード
2 アノード
3 ゲート

T-53 (13-10E1B)




- 1 カソード
2 アノード
3 ゲート

T-54 (13-10F1B)




- 1 カソード
2 アノード
3 ゲート

T-55 (13-5A1D)



- 1 カソード
2 ゲート
3 アノード

T-56 (13-13C1A)




- 1 カソード
2 アノード
3 ゲート


TT-1




TT-2

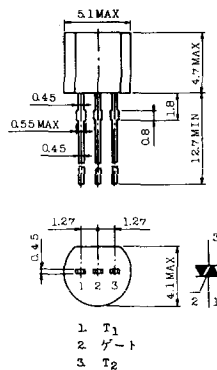


TT-3

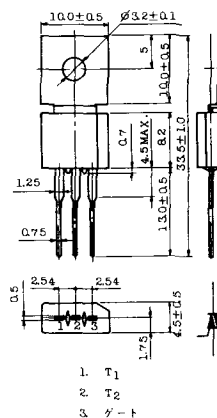


TT-4

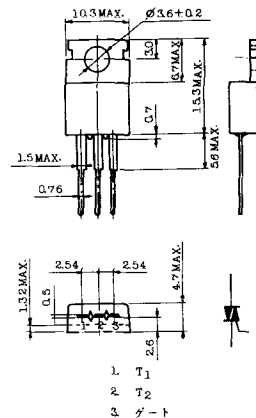


TT-5

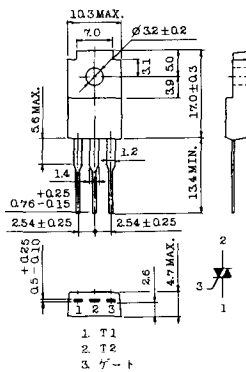


TT-6

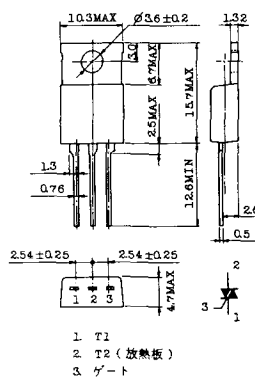

TT-7

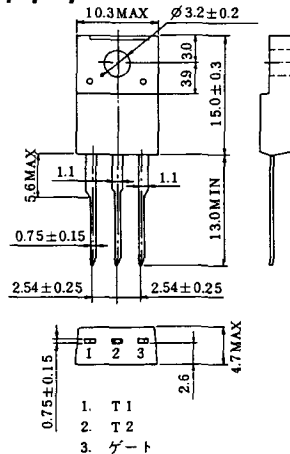

TT-8

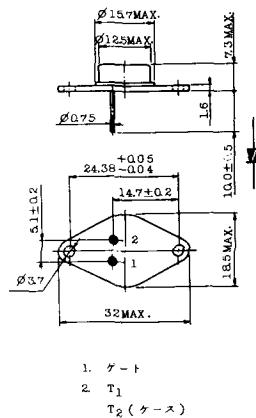

TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10



1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

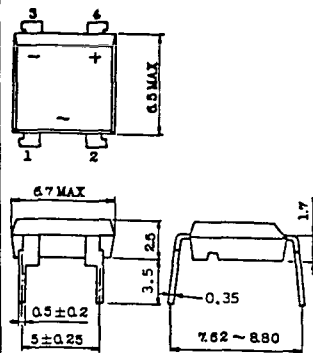


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

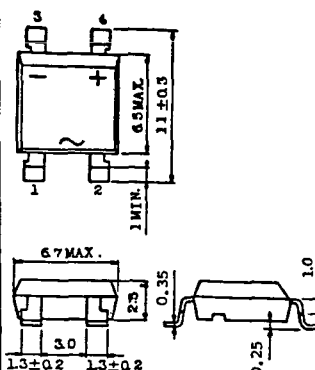


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)



1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)




1. T₁
2. T₂
3. ゲート


TS-1




TS-2

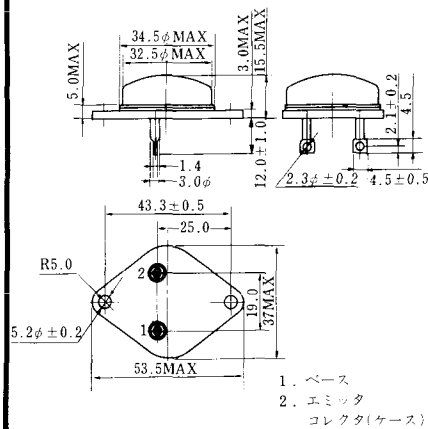

TS-3

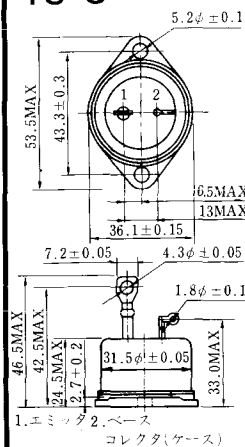


TS-4

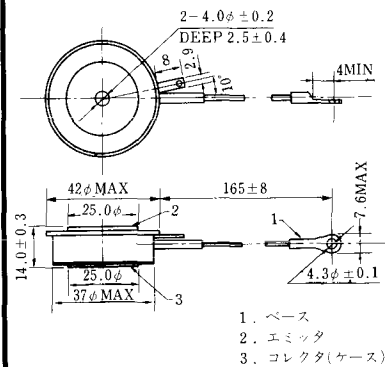


TS-5





TS-6

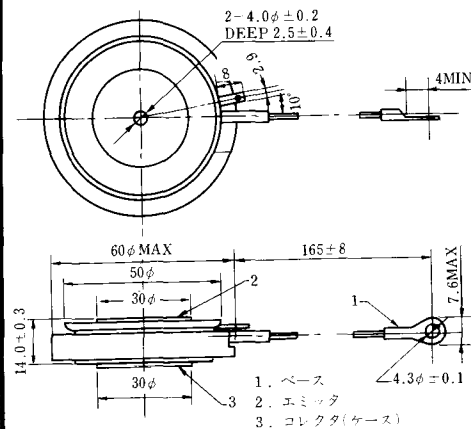


TS-7

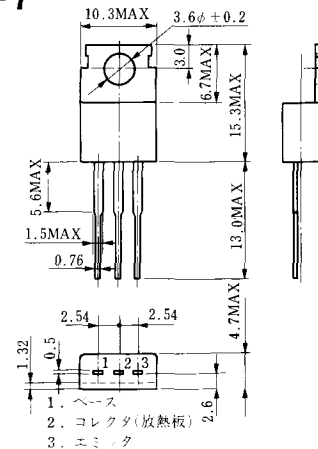





S-94B2A

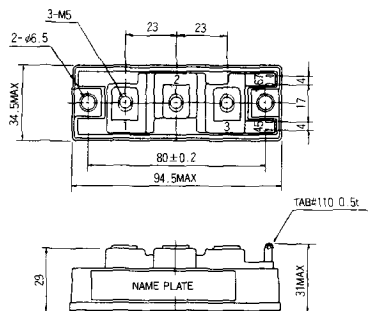


S-94D1A

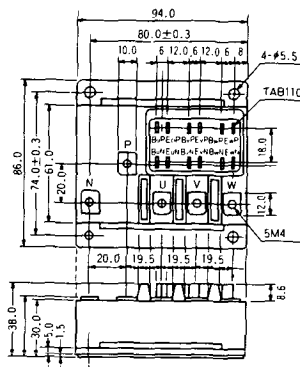


S-95A1A




S-95B1A

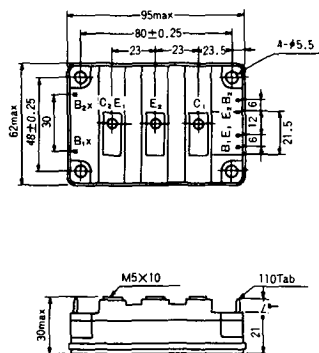

S-98B1B

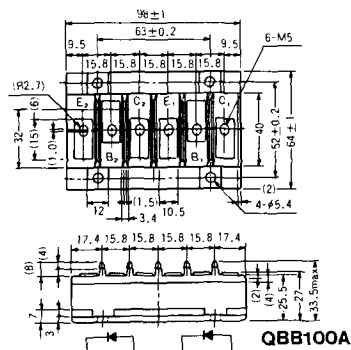


S-108A2A




S-108B1A



S-108B1B




S-108B1C

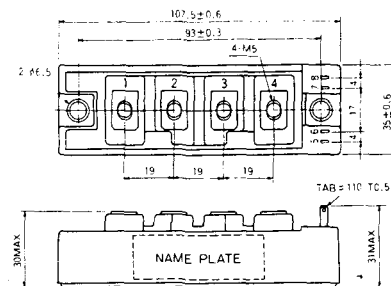

S-108B2A



S-108B2B

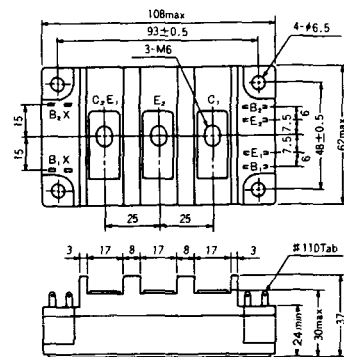

2-22B1A



2-27A4A




2-33C1A



2-33D1A



2-33F1A

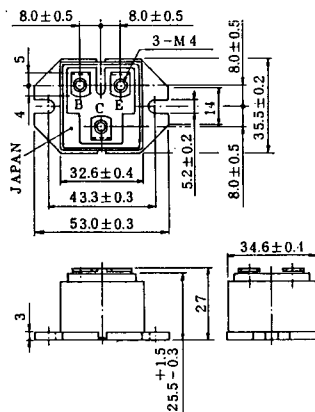

2-37A1A




2-48A3A



2-48A3B



2-48A4A




2-64A2A




2-64A2B




2-68A2A

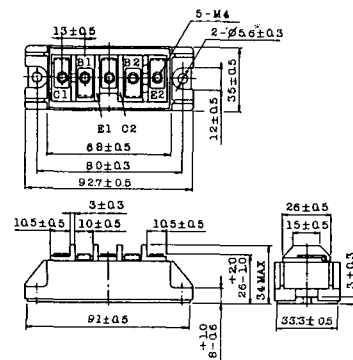


2-68B2A

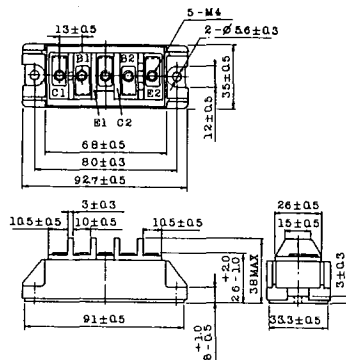


2-68C1A

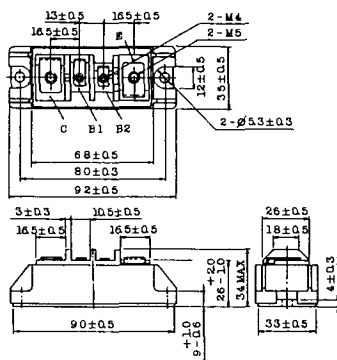


2-68D2A

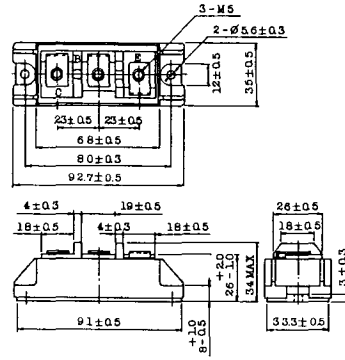


2-72A3A

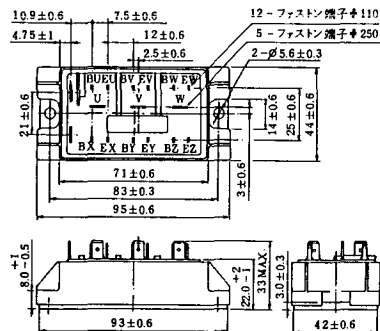

2-80A1A

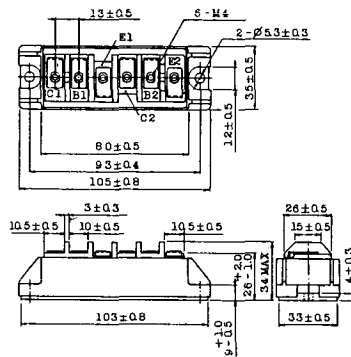


2-80B1A




2-108B1A




2-109A3A

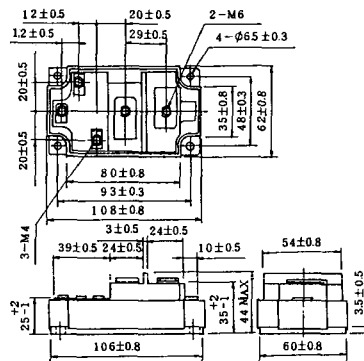


2-109A4A

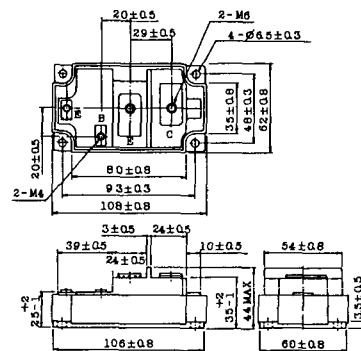

2-109B3A

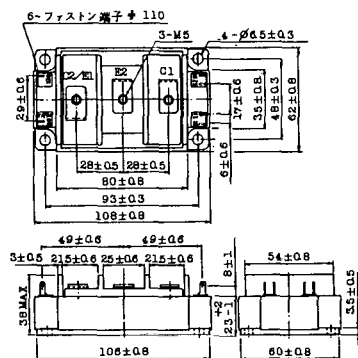

2-109B4A

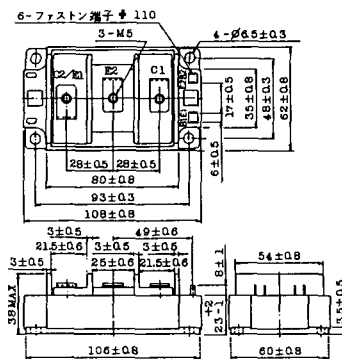

BBT-II

BBTII
1D200A-020



BBT-III

BBTIII
ETN31-055
ETN36-030
ETN36-030
ETN35-030



BBT-III






BBTIII
ETN01-055
ET1257



BBT-IV

BBTIV
1D500A-030



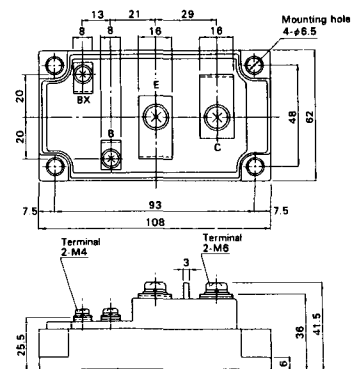

M-107




M-116



M-201




M-202

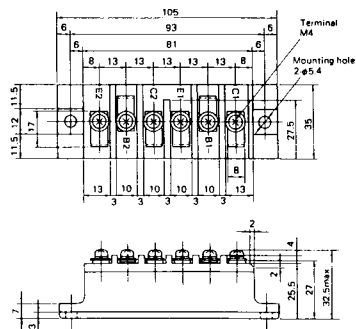


M-203




M-204

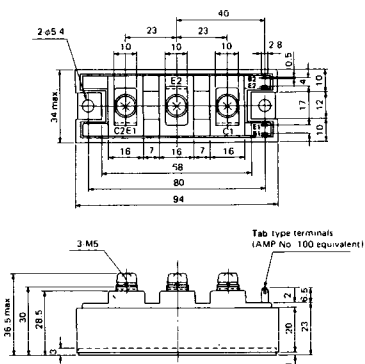


M-205

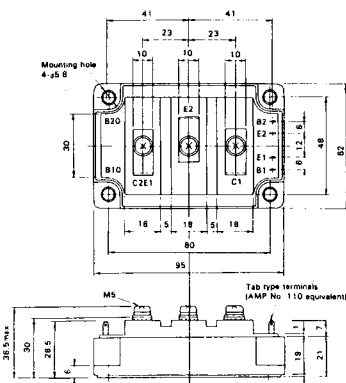


M-206

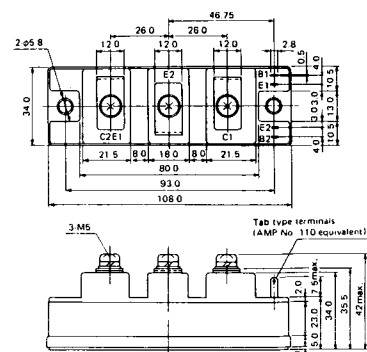


M-207

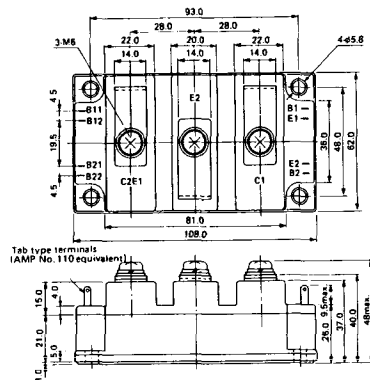


M-208

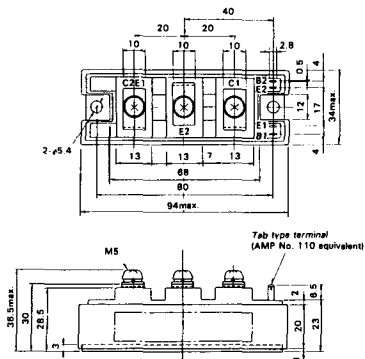

M-209

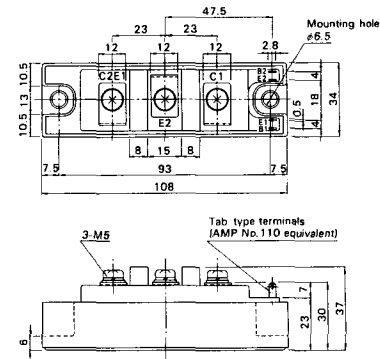


M-210


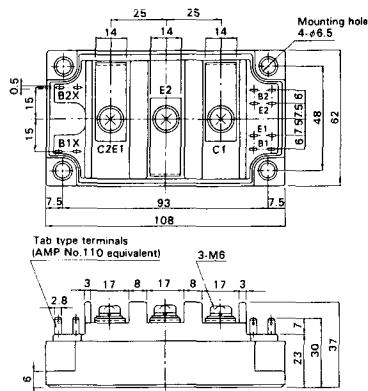


M-211




M-212






M-215


M-216



M-217



M-218



M-601



M-602



M-603



M-604




M-605




M-606



M-607



M-608




M-609



M-610




M-616



M-2E6A



M-2F6A



M-2G6A




M-3A1A




M-3B1A




M-3B1B

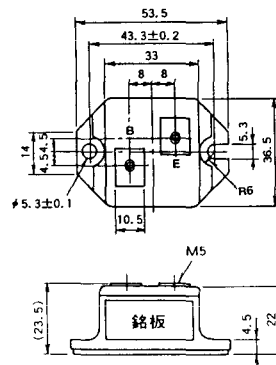


M-3C1A

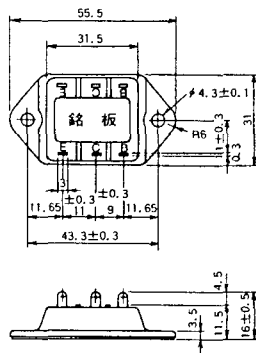

M-3D6A

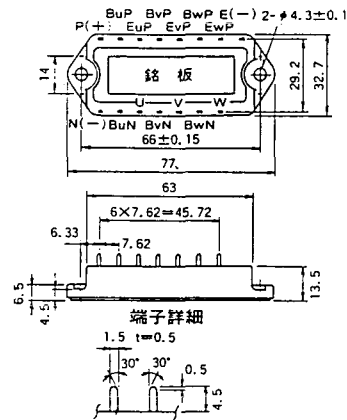


M-3E6A

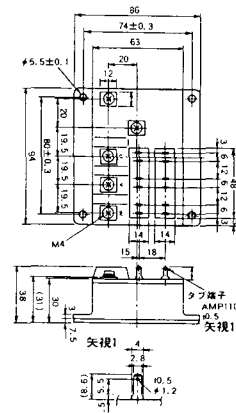


M-4A1A



M-4A2A



M-4A1B




M-4A2B




M-4B2A



M-5A1A




M-5A1B



M-5A2A



M-5B2A




M-5C2A



M-5D2A



M-6A1A

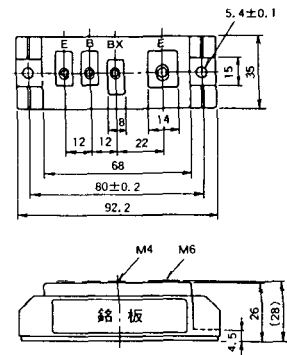

M-7A1A



M-7B1A



M-8A1A



M-8A1B



M-8A2A




M-8A2B



M-8B2A



M-9A1A




M-9A2A




M-9B1A




M-9C2A




M-1A1B

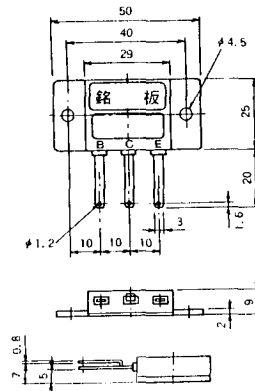


M-1A1C



M-2E6B

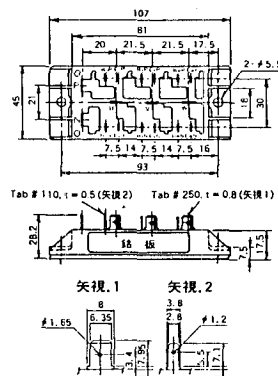


M-2E6C




M-10A2A



M-10A2B




M-11A2A

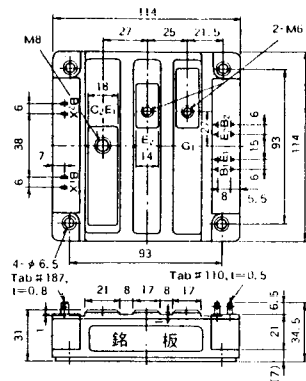


M-12A6A



M-12B6A



M-12B6B

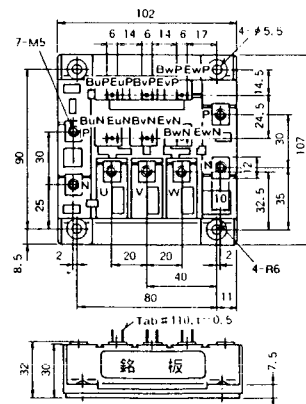

M-4A2D



M-4A2E




M-4C2A




M-4C2B



M-9B1C

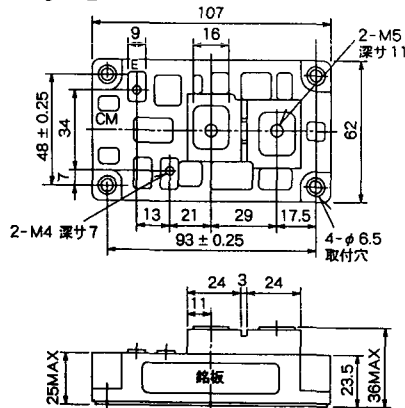

M-9D2A

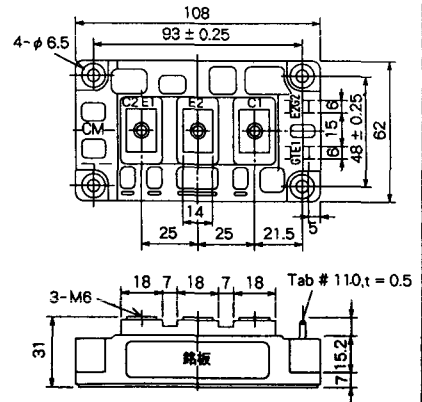


M-9D2B



M-10A2C



H-101




Weight :480g

TERMINALS




LF-J

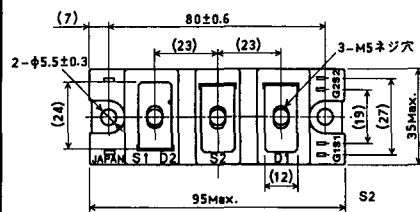


LF-K




U-1

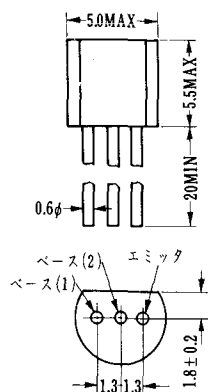


U-2

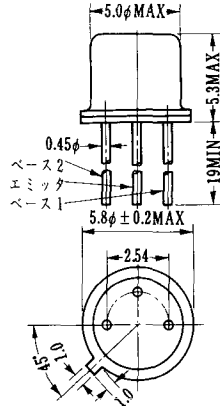


U-3

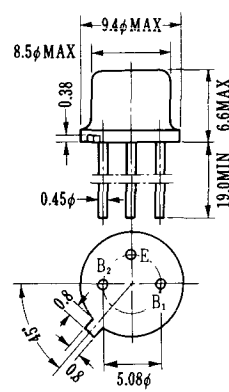

U-4

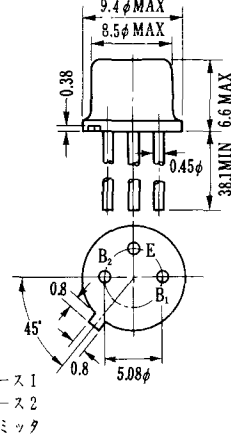


U-5

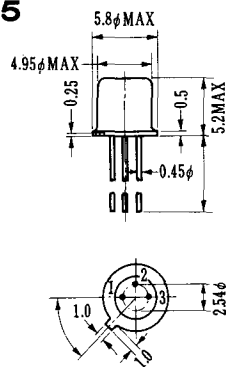


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

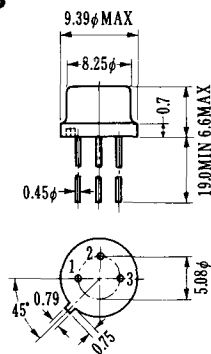

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

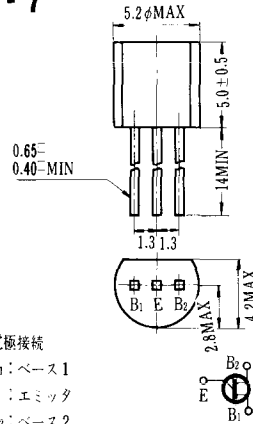

U-8

