


トランジスタ・モジュール (NPN, ダーリントン接続, 4個/6個内蔵)


- ダーリントン・トランジスタを4個/6個内蔵
- フリーホイール・ダイオード付
- 電極と金属ケース部が絶縁されている
- ファストン端子による接続
- 直流電流増幅率は80以上(定格電流にて)

■等価回路

EL-1

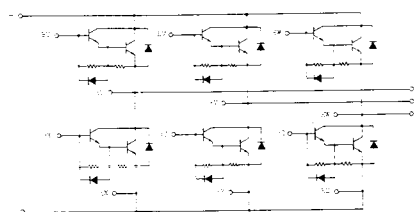


EL-2

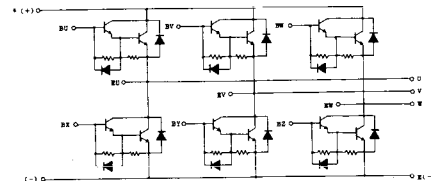

注1. $T_c = 25^\circ\text{C}$.

注2. AC, 1分間。


型 名	最 大 定 格 ($T_a=25^{\circ}\text{C}$)											電 氣 的 特 性									
	V_{CE0}	$V_{CEX(SUS)}$	V_{EBO}	I_C	I_{CP}	I_B	I_F	I_{FM}	P_C	T_J	T_{stg}	V_{iso}	I_{CBO}	I_{EBO}	$V_{CE0(SUS)}$	h_{FE}					
	$V_{CEO \#}$				(Ims)			(Ims)	(W)	($^{\circ}\text{C}$)	($^{\circ}\text{C}$)	(V)	(mA)	V_{CB}	(mA)	V_{EB}	(V)	I_C			
	(V)	(V)	(V)	(A)	(A)	(A)	(A)	(A)					最大	最大	最大	最小	最小	V_{CE}	I_C		
MG15G4GL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG20G4GL1	600	600 #	6	20	40	2.0	20	40	125	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	20
MG10G6EL1	500	500	6	10	20	1.0	10	20	80	150	-40~125	2500	1.0	500	100	6	400	0.5	100	5	10
MG10G6EL2	600	600	6	10	20	1.0	10	20	80	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	10
MG10Q6EK1	1200	1200	7	10	20	1.0	10	20	100	150	-40~125	2500	1.0	1200	200	7	900	0.5	100	5	10
MG15G6EL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG15G6EL2	500	500	6	15	30	1.0	15	30	80	150	-40~125	2500	1.0	500	100	6	400	0.5	100	5	15
MG15H6EL1	600	600	6	15	30	1.5	15	30	100	150	-40~125	2500	1.0	600	100	6	500	0.5	100	5	15
MG15N6EK1	1100	1100	7	15	30	1.5	15	30	150	150	-40~125	2500	1.0	1100	200	7	900	1.0	100	5	15
MG20G6EL1	600	600	6	20	40	2.0	20	40	125	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	20
MG20G6EL2	600	600	6	20	40	2.0	20	40	100	150	-40~125	2500	1.0	600	100	6	400	0.5	100	5	20
MG20Q6EK1	1200	1200	7	20	40	2.0	20	40	200	150	-40~125	2500	1.0	1200	200	7	900	0.5	100	5	20
MG25N6EK1	1100	1100	7	25	50	2.5	25	50	300	150	-40~125	2500	1.0	1100	200	7	900	0.5	100	5	25
MG30G6EL1	600	600	6	30	60	3.0	30	60	250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G6EL2	600	600	6	30	60	2.0	30	60	200	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG50G6EL1	600	600	6	50	100	5.0	50	100	300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG75G6EL1	600	600	6	75	150	10	75	150	350	150	-40~125	2500	1.0	600	200	6	450	0.5	80	5	75
MG75H6EL1	600	600	6	75	150	10	75	150	350	150	-40~125	2500	1.0	600	200	6	500	0.5	80	5	75

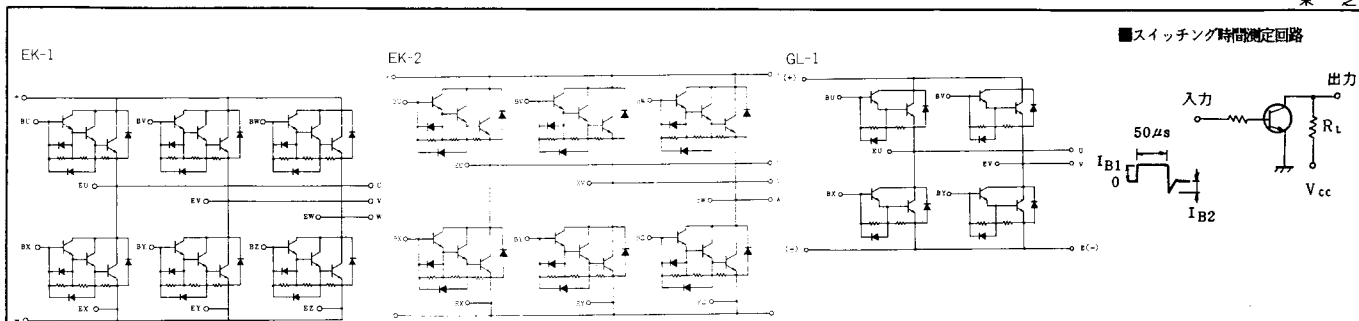


注3. スwitching時間の * 印はtyp.値.

(T _a = 25℃)											エミッタ・コレクタ間ダイオード						熱抵抗		等 価 回 路	外形図	記 事	型 名
飽和電圧 (V)		I _C	I _B	スイッチング時間 (μs)			I _{B1}	I _{B2}	V _{CC}	R _L	V _F (V)	I _F (A)	t _{rr} (μs)	I _F (A)	V _{BE} (V)	di/dt (A/μs)	R _{th(j-c)} (℃/W)					
V _{CE}	V _{BE}			t _{on}	t _{stg}	t _f											トランジスタ部	ダイオード部				
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(V)	(Ω)	最大	最大	最大	最大	最大	最大	最大	最大				
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-2	60	1.25		GL-1	2-48A3A	単相ブリッジ接続	MG15G4GL1
2.0	2.5	20	0.5	1	12	2	0.5	-0.5	300	15	1.6	20	0.7	20	-2	60	1.0		GL-1	2-48A3A	単相ブリッジ接続	MG20G4GL1
2.0	2.5	10	0.25	1	12	2	0.25	0.25	300	30	1.6	10	0.7	10	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG10G6EL1
2.0	2.5	10	0.3	1	12	2	0.3	-0.3	300	30	1.6	10	0.7	10	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG10G6EL2
2.5	3.5	10	0.2	2	14	6	0.2	-0.6	600	60	1.8	10	2.0	10	-3	60	1.25	3.6	EK-1	2-72A3A	三相ブリッジ接続	MG10G6EK1
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-2	60	1.25		EL-2	2-64A2A	三相ブリッジ接続	MG15G6EL1
2.0	2.5	15	0.4	1	10	3	0.4	-0.4	300	20	1.7	15	0.7	15	-2	60	1.56		EL-2	2-64A2A	三相ブリッジ接続	MG15G6EL2
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.7	15	0.7	15	-2	60	1.25	2.8	EL-2	2-64A2A	三相ブリッジ接続	MG15SH6EL1
2.5	3.5	15	0.3	2	11	6	0.3	-0.9	600	40	1.5	15	1.0	15	-3	60	0.83	1.3	EK-2	2-94B1A	三相ブリッジ接続	MG15N6EX1
2.0	2.5	20	0.5	1	12	2	0.5	-0.5	300	15	1.6	20	0.7	20	-2	60	1.0		EL-2	2-64A2A	三相ブリッジ接続	MG20G6EL1
2.0	2.5	20	0.5	1	10	3	0.5	-0.5	300	15	1.7	20	0.7	20	-2	60	1.25		EL-2	2-64A2A	三相ブリッジ接続	MG20G6EL2
2.5	3.5	20	0.4	2	14	6	0.4	-1.2	600	30	1.8	20	2.0	20	-3	60	0.625	1.8	EK-1	2-72A3A	三相ブリッジ接続	MG20G6EK1
2.5	3.5	25	0.5	2	14	6	0.5	-1.5	600	24	1.7	25	1.0	25	-3	100	0.41	1.3	EK-2	2-94B1A	三相ブリッジ接続	MG25N6EX1
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10	1.5	30	1.0	30	-3	100	0.5	1.8	EL-2	2-94A2A	三相ブリッジ接続	MG30G6EL1
2.0	2.5	30	0.6	1	12	3	0.6	-0.6	300	10	1.6	30	0.7	30	-2	60	0.625	1.8	EL-1	2-27A4A	三相ブリッジ接続	MG30G6EL2
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6	1.5	50	1.0	50	-3	100	0.41	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG50G6EL1
2.0	2.5	75	2.0	2	12	3	2.0	-2.0	300	4	1.7	75	1.0	75	-3	100	0.36	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG75G6EL1
2.0	2.5	75	2.0	2	12	4	2.0	-3.0	300	4	1.7	75	1.0	75	-3	100	0.36	1.3	EL-2	2-94A2A	三相ブリッジ接続	MG75SH6EL1


FD-1

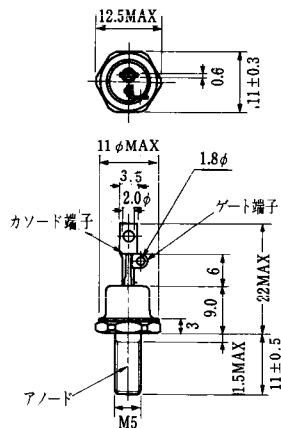


FD-2

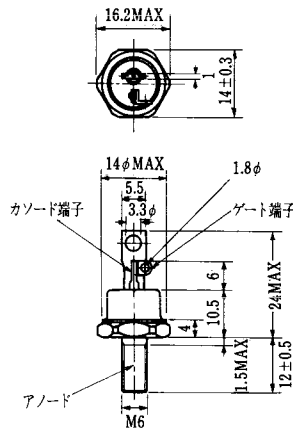


FD-3

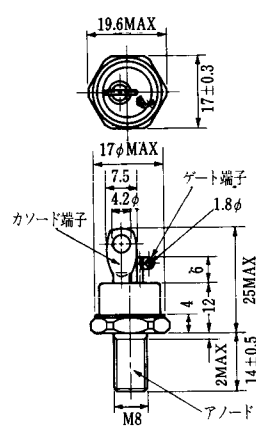


FD-4

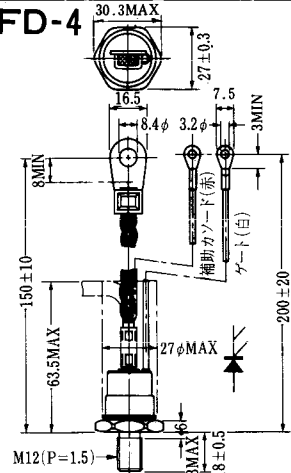


FD-5

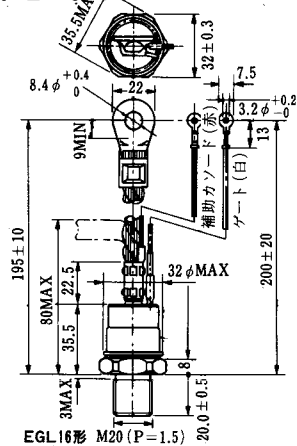


FD-6

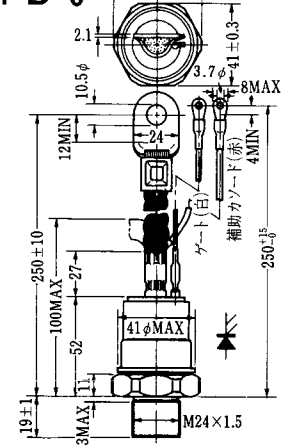


FD-7

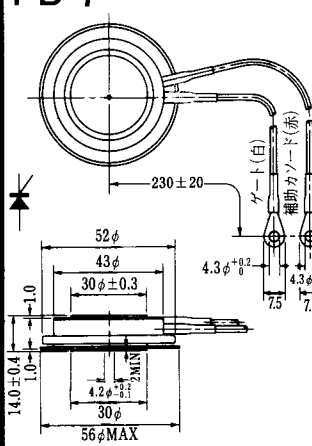


FD-8

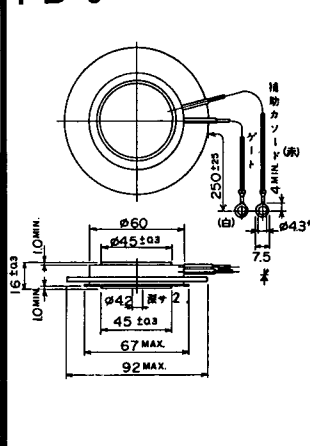

FD-9



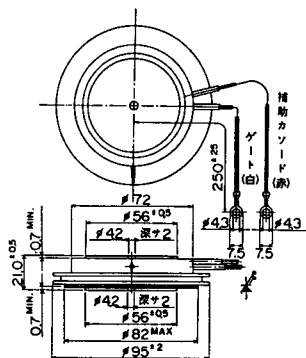


FD-10

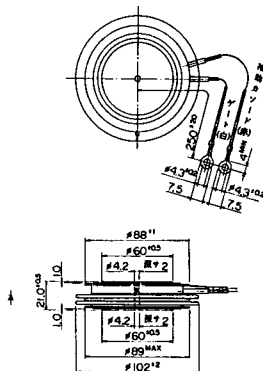


FD-11







FD-12

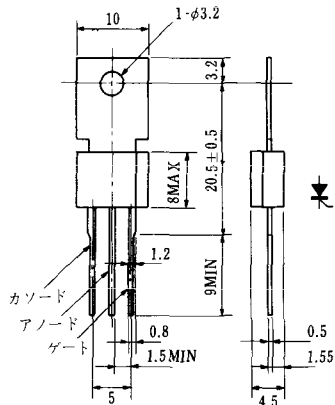

Unit in mm(inch)




Unit in mm(inch)

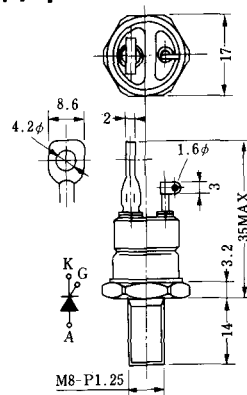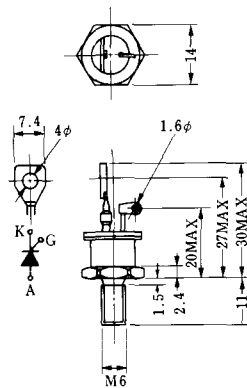


- ①アノード
②カソード
③ゲート

H-9A




H-9B




- ① アノード
- ② カソード
- ③ ゲート


H-10

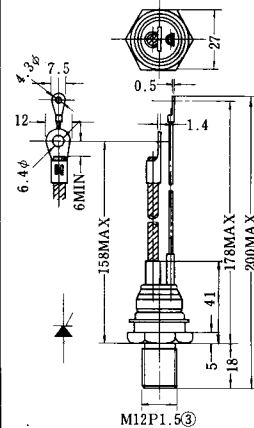


H-11

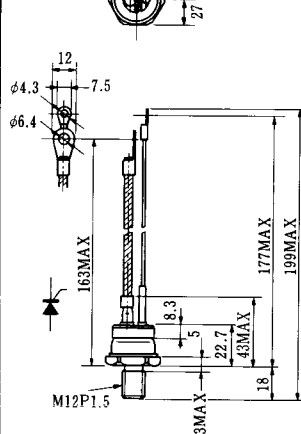


H-12

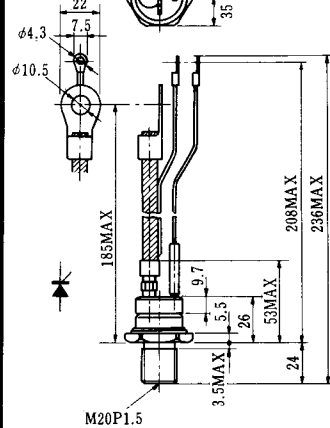

H-13

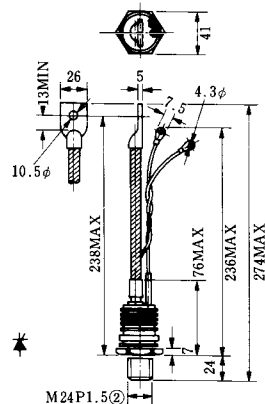


H-14




Unit in mm (inch)

H-15




Unit in mm (inch)


H-16

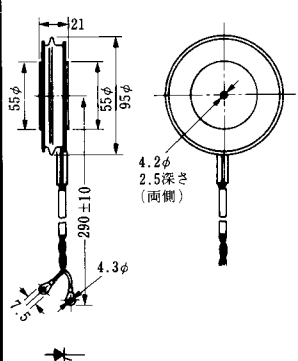


H-17

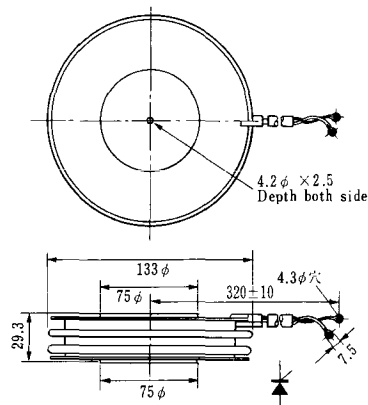


H-18




H-19

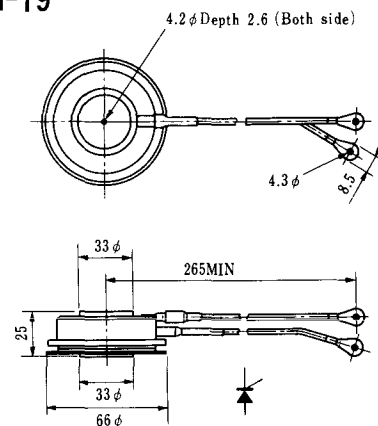


H-20

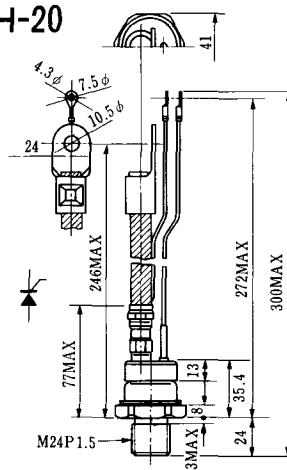


H-21

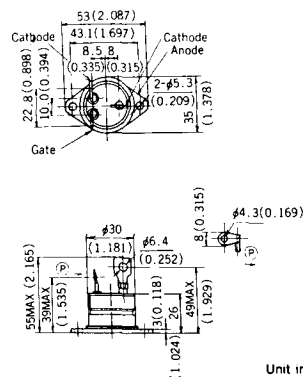


H-22

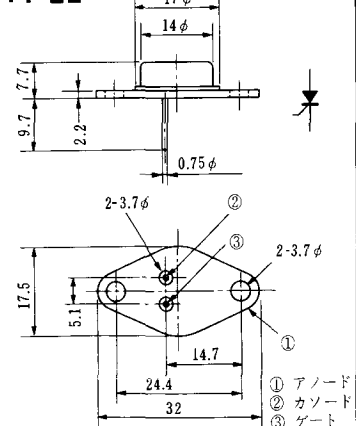


H-23

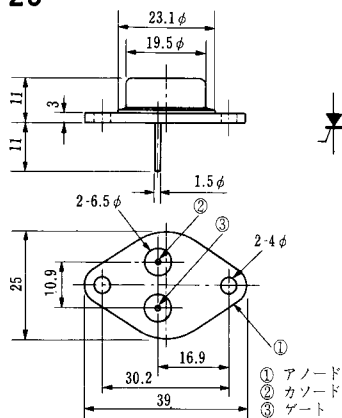


H-24

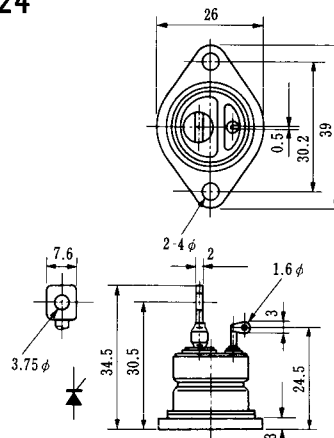

H-25

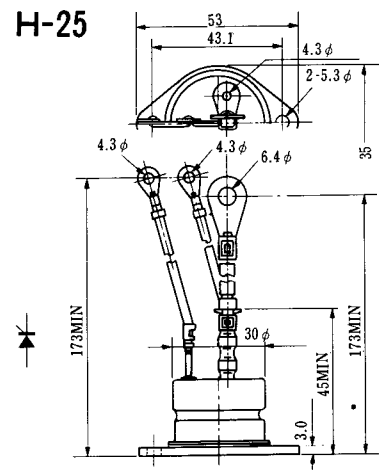


H-26

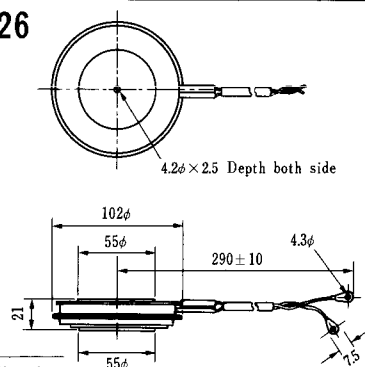


Type	Direction of polarity
CA12	

H-27




Type	Direction of polarity
CF11V	

H-28

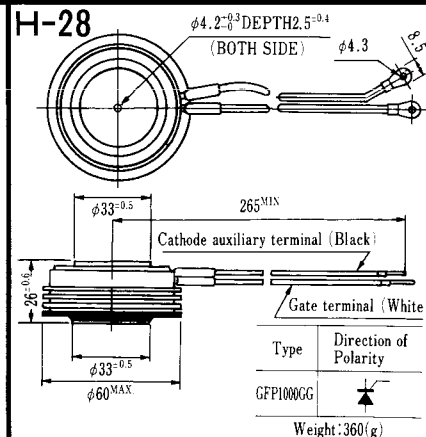


Note: The thickness is a dimension in press at the rated mounting force.

H-29

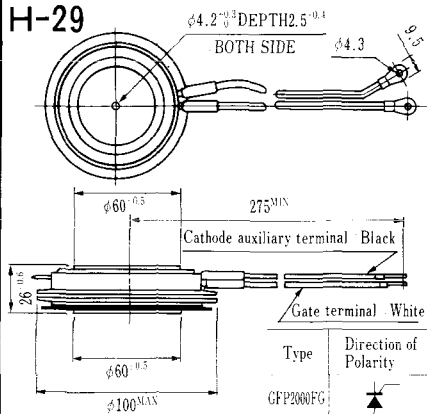


Note : The thickness is a dimension in press at the rated mounting force. Weight: 870(g)

H-30

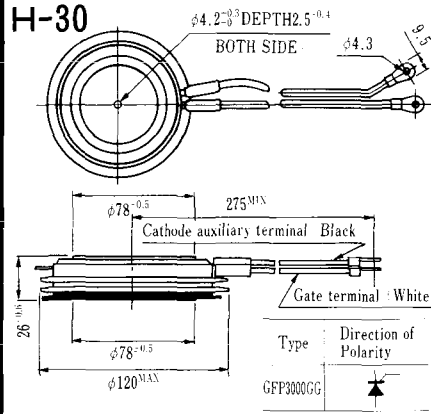



Note : The thickness is a dimension in press at the rated mounting force. Weight: 1,460(g)

HT-1

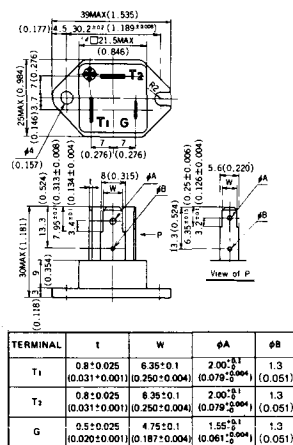


Unit in mm (inch)


HT-2

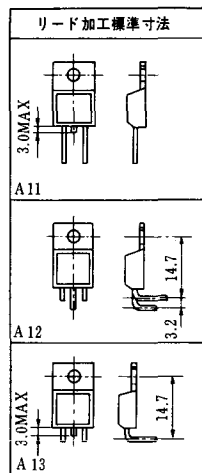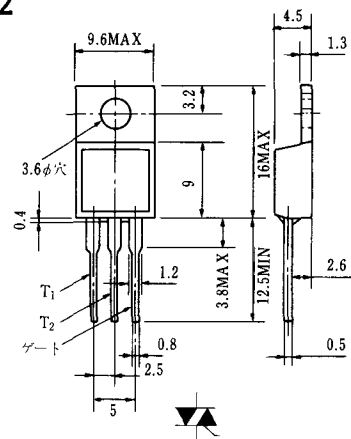


HT-3

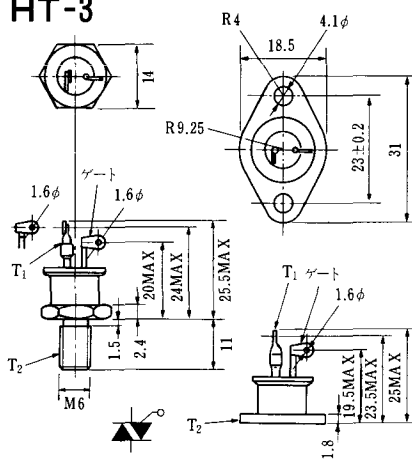

HT-4

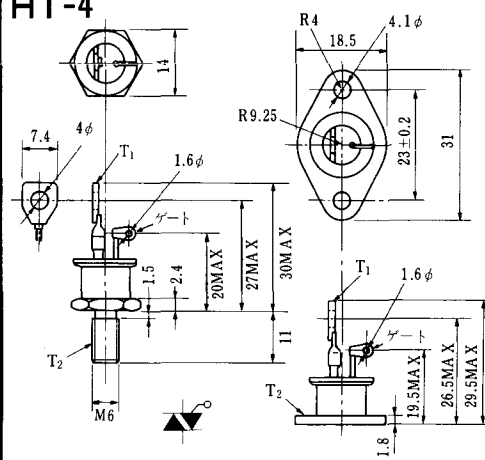


HT-5

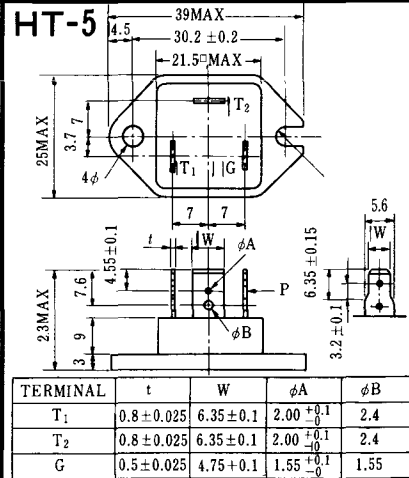


《寸法図単位：mm》


M-1

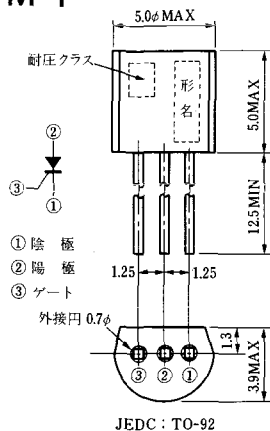


M-2

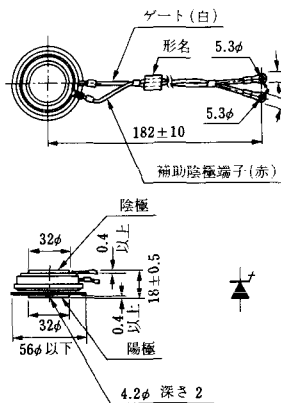


M-3

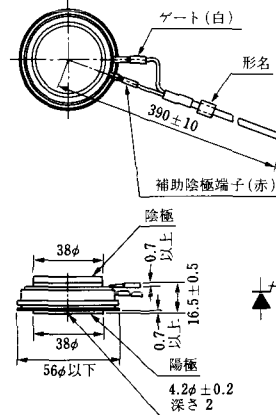


M-4

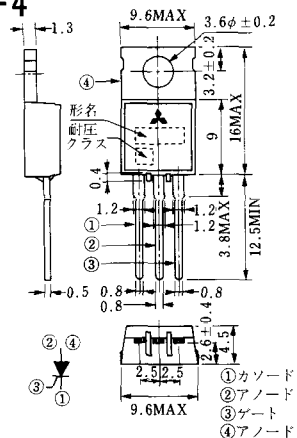


M-5

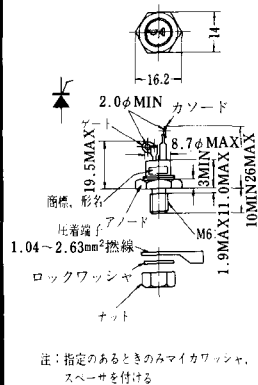


M-6

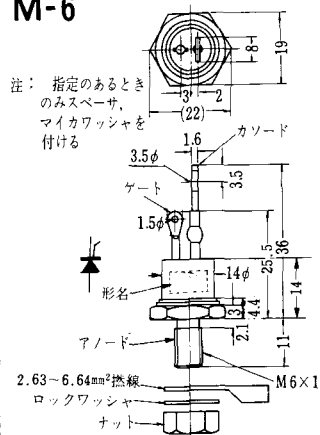


M-7

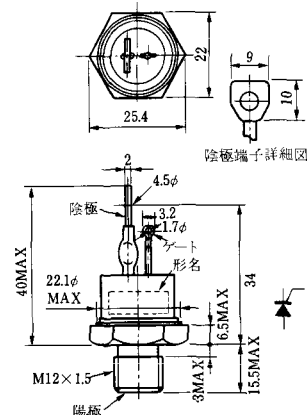


M-8

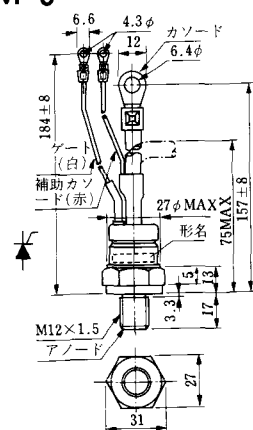


M-9

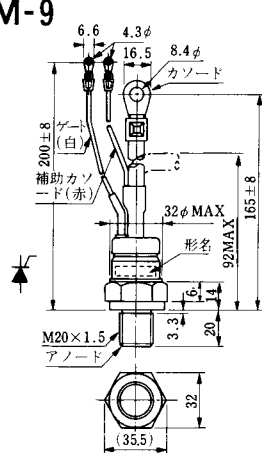


M-10

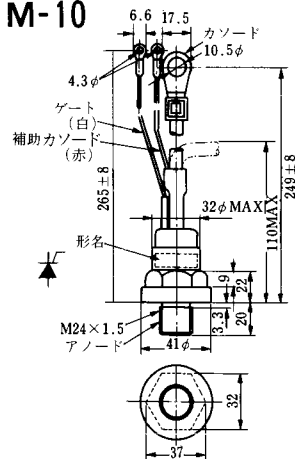


M-11

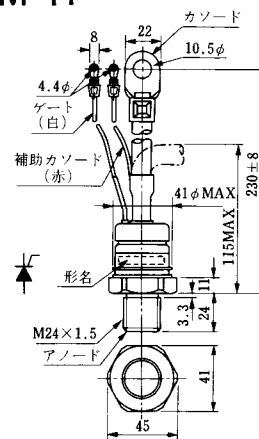


M-12

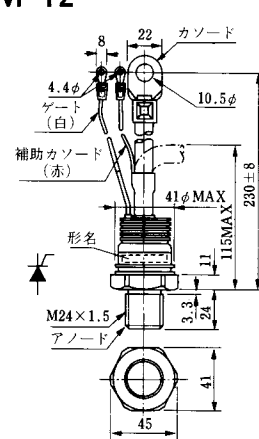


M-13

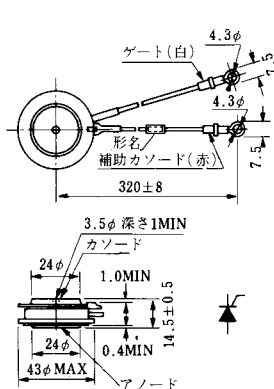


M-14

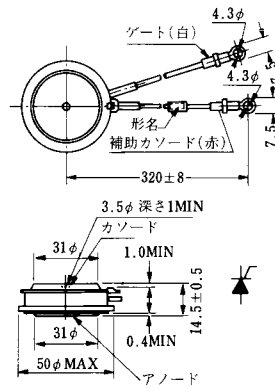


M-15

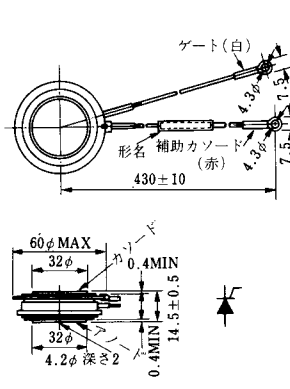


M-16

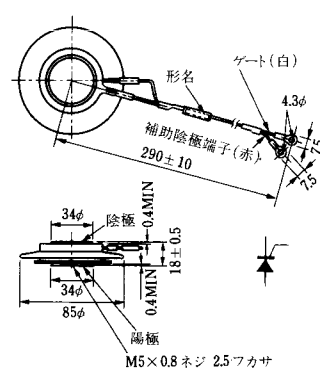


M-17

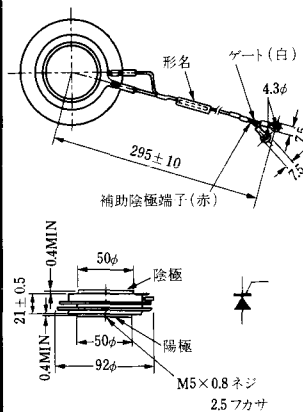


M-18

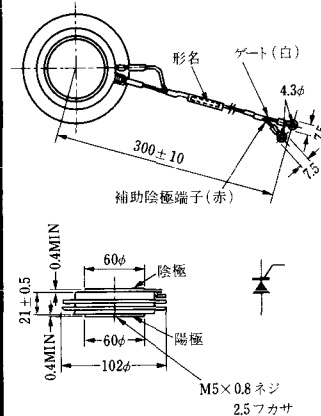


M-19

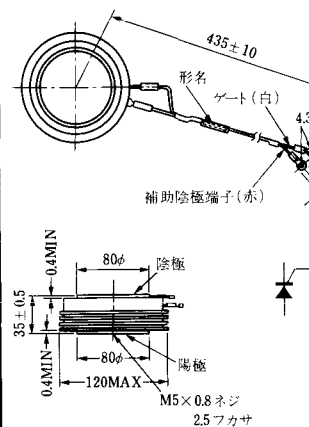


M-20

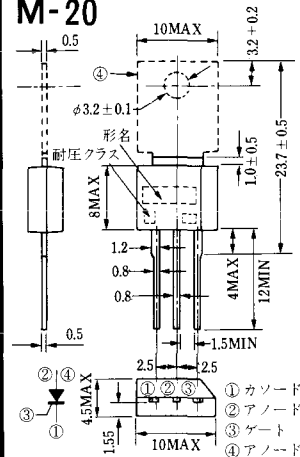


M-21

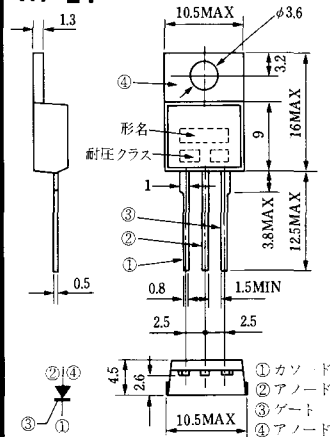


M-22

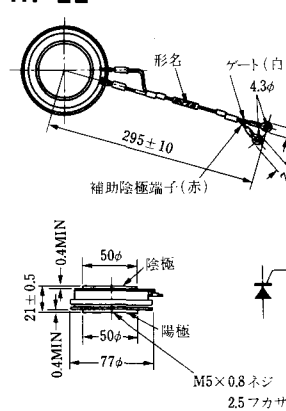


M-23

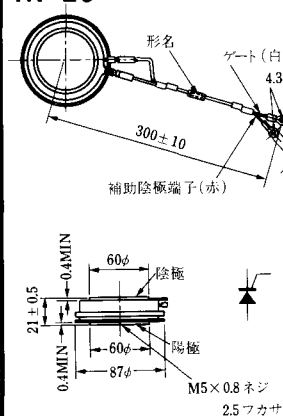


M-24

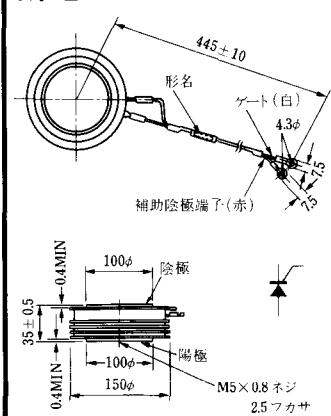


M-25

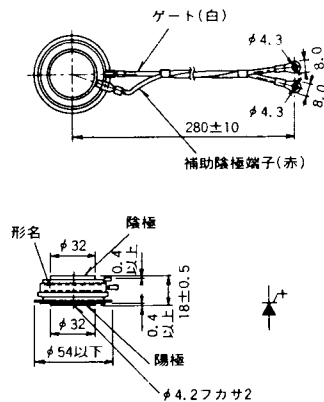


M-26

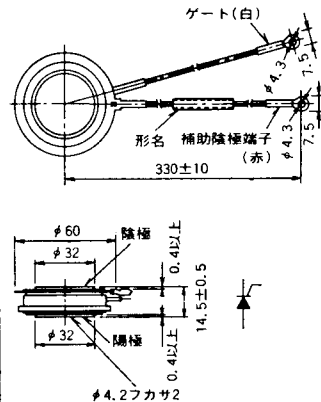


M-27

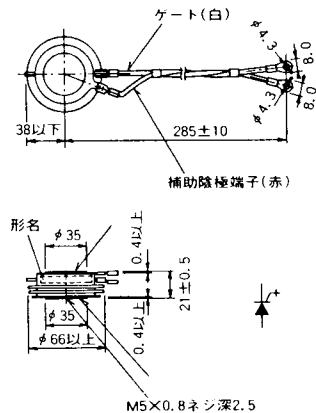


M-28

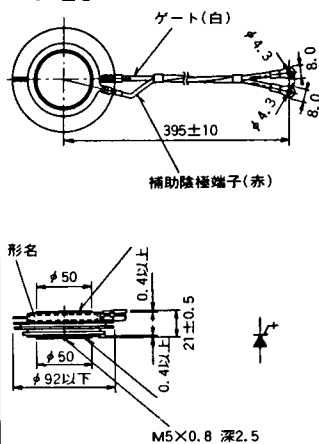


M-29

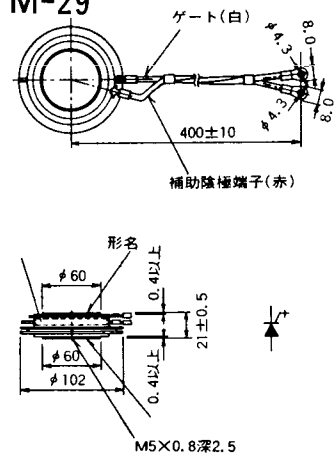


M-30

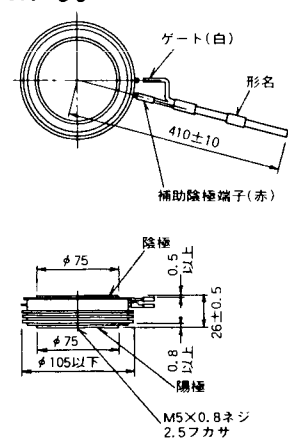


M-31

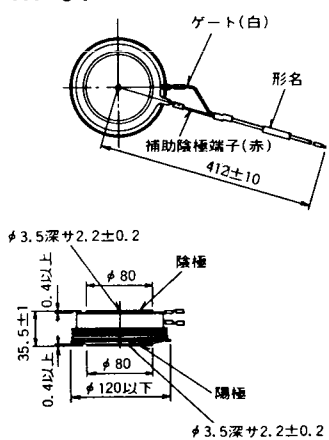


M-32

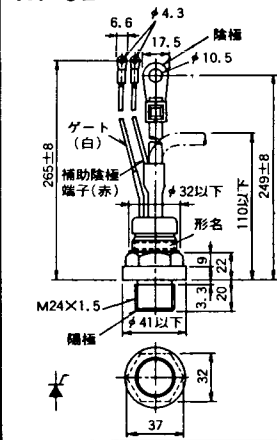


M-33

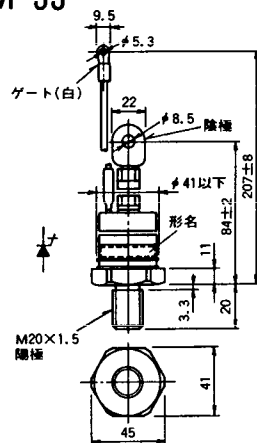


M-34

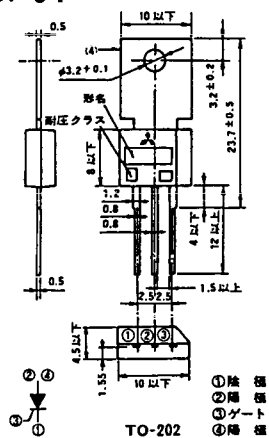


MT-1

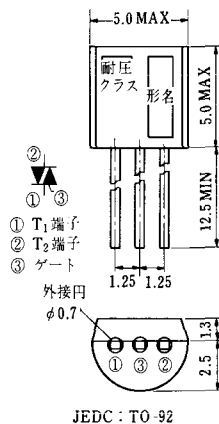


MT-2

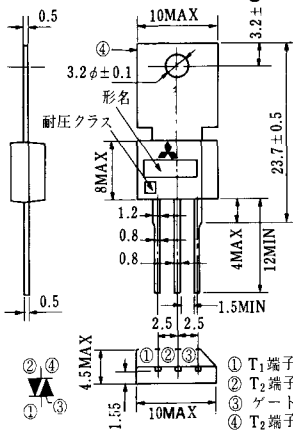


MT-3

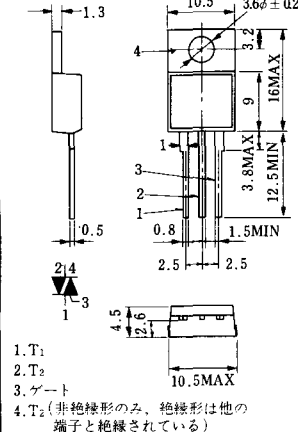


MT-4

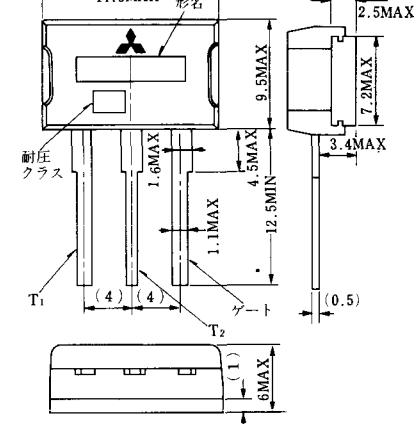


MT-5

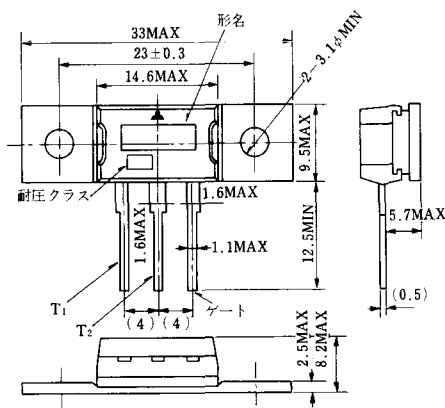


MT-6

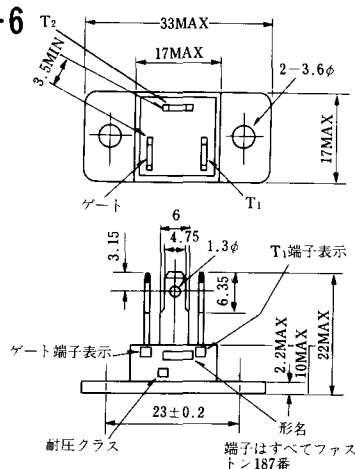


MT-7

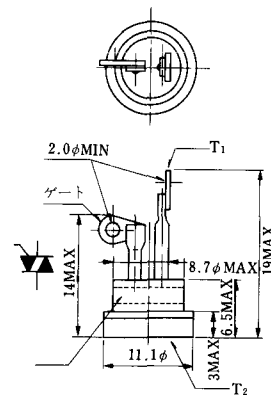


MT-8

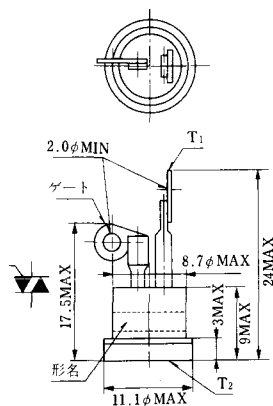


MT-9

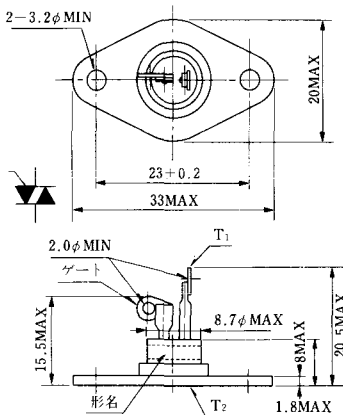


MT-10

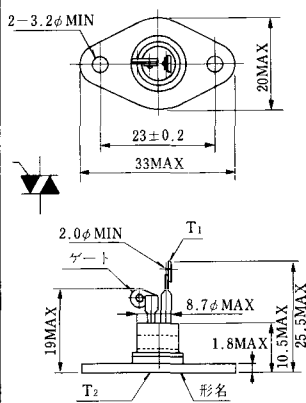


MT-11

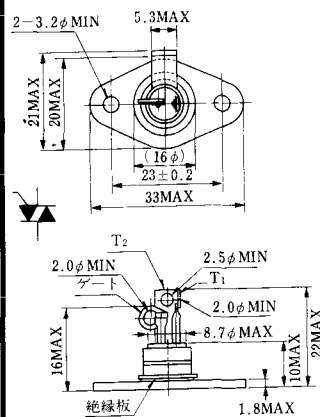


MT-12

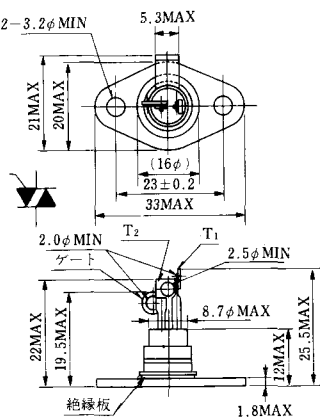


MT-13

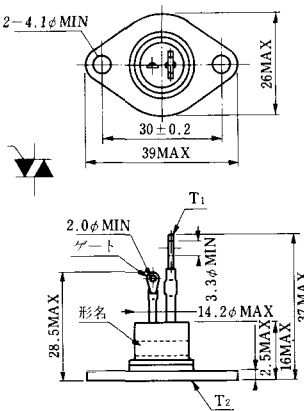


MT-14

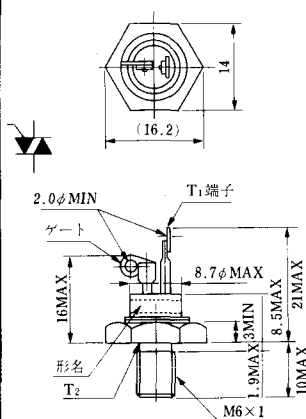


MT-15

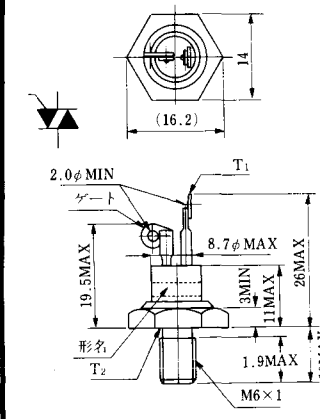


MT-16

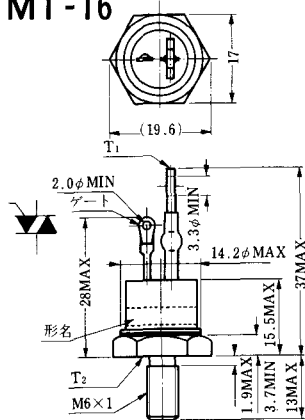


MT-17

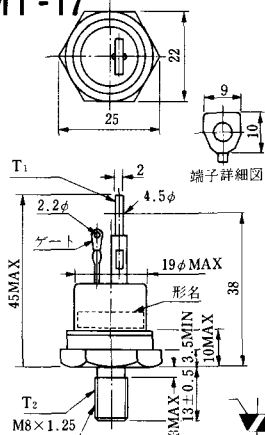


MT-18

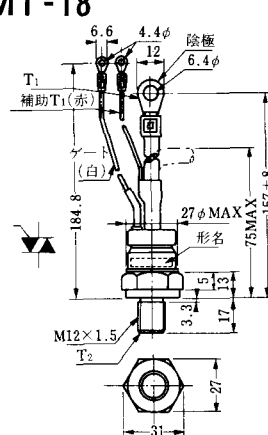


MT-19

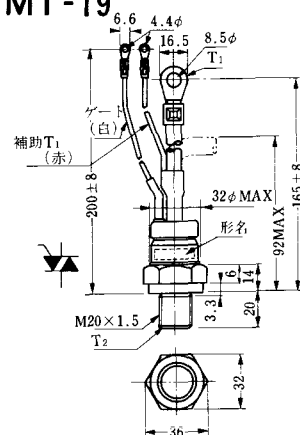


MT-20

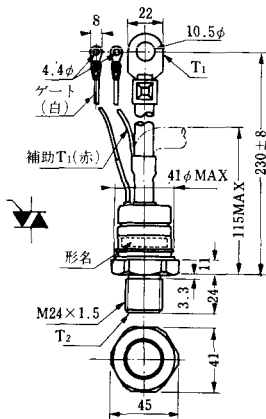


MT-21

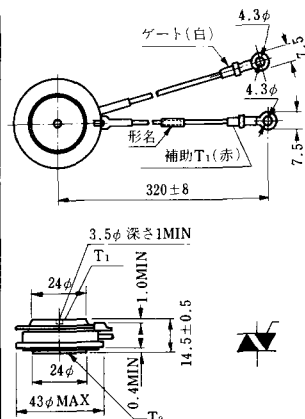


MT-22

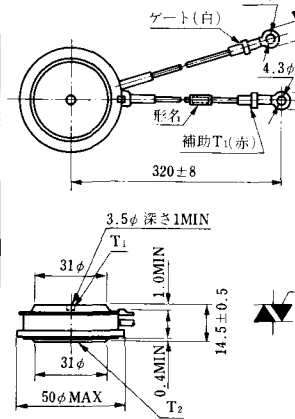

MT-23

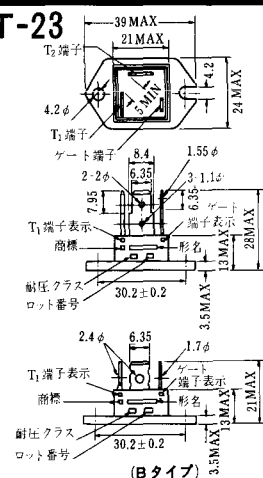


MT-24



TO - 3P

- ① T1 端子
- ② T2 端子
- ③ ゲート 端子
- ④ T2 端子


N-1

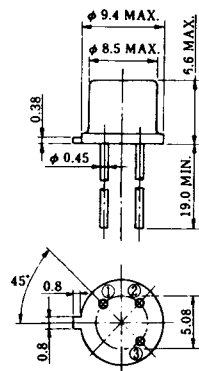

電極接続

- ① カソード
- ② ゲート
- ③ アノード


N-2



電極接続

- ① ゲート
- ② アノード
- ③ カソード


N-3

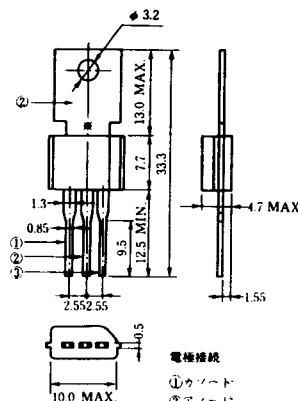

電極接続

- ① カソード
- ② アノード
- ③ ゲート


N-4

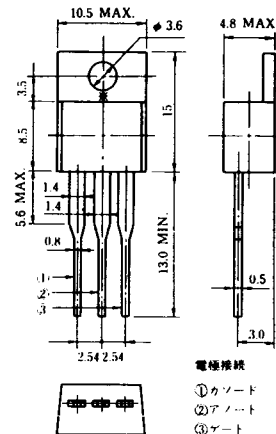


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5

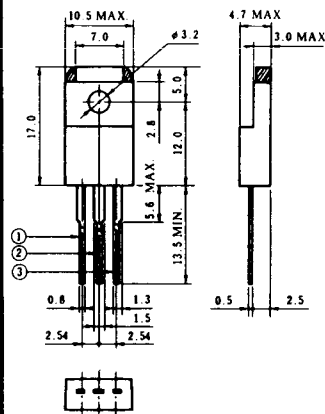


N-6

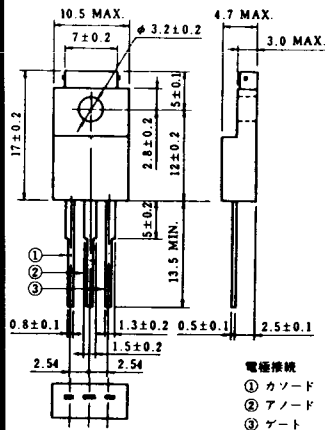


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

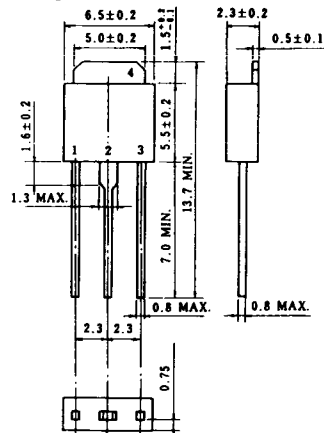


N-8

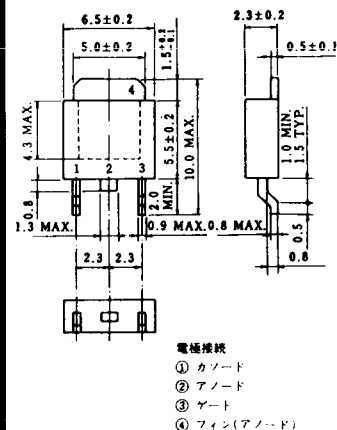

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9




電極接続

K : カソード

A : アノード

G : ゲート

NA-1

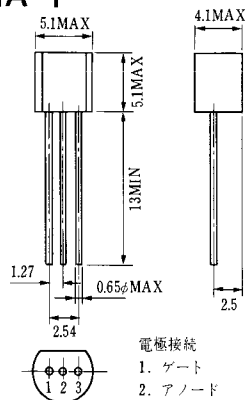


電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2

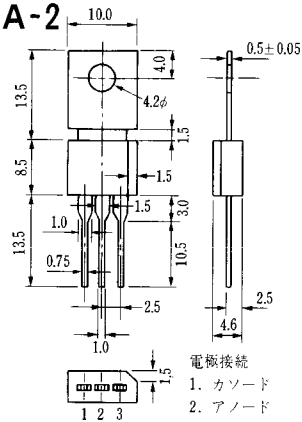


電極接続

1. カソード
2. アノード
3. ゲート

JEDEC: TO-202AA


NI-16

503PLF
503PLH




NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA




NI-23

1201PGA「E



NI-24


2001PGB^r JE



NI-25


NI-26

NT-1




電極接続
① T₁
② ゲート
③ T₂

NT-2




電極接続
① T₁
② ゲート
③ T₂

NT-3

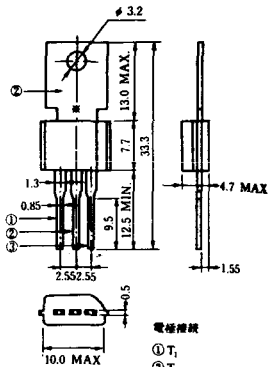


電極接続
① T₁
② T₂
③ ゲート

NT-4

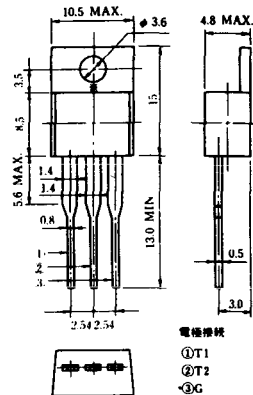


電極接続
① T₁
② T₂
③ G

NT-5

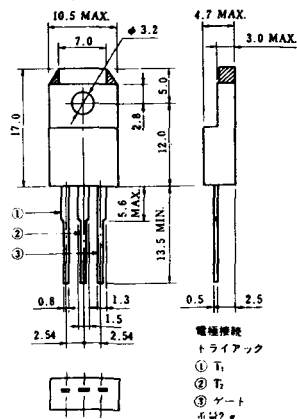


電極接続
トリアック
① T₁
② T₂
③ ゲート
※ 2g

NT-6

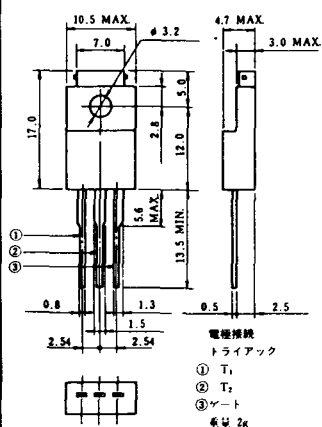


電極接続
トリアック
① T₁
② T₂
③ ゲート
※ 2g

NT-7

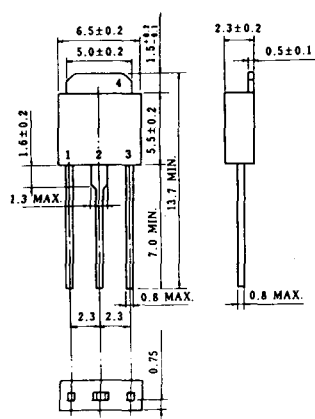


NT-8

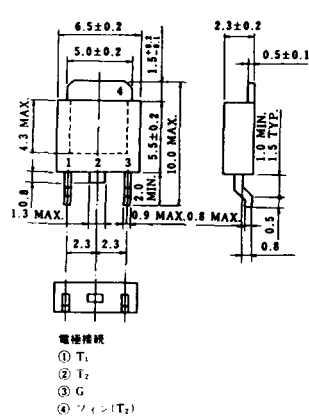


電極接続
① T₁
② T₂
③ G
④ フォイン(T₂)


S-1

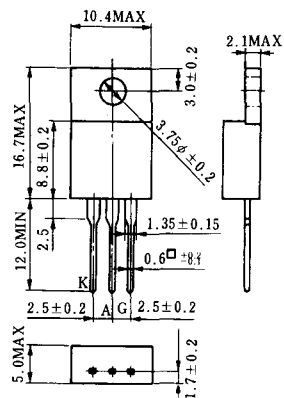


ST-1

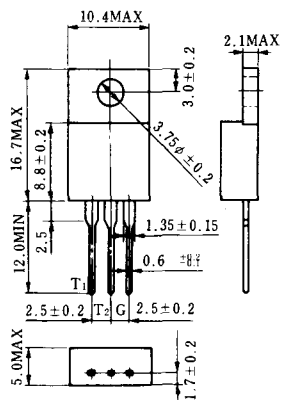


SA-1

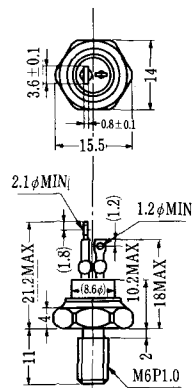


SA-2

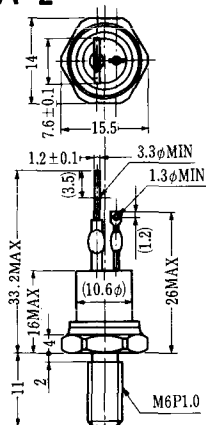


SA-3

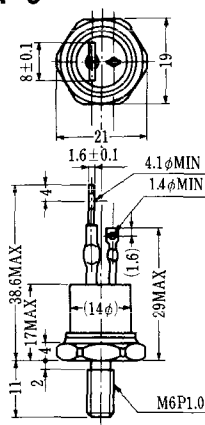


SA-4

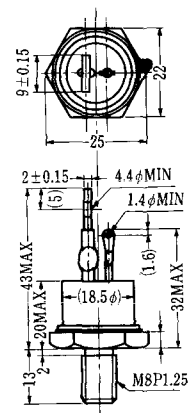


SA-5

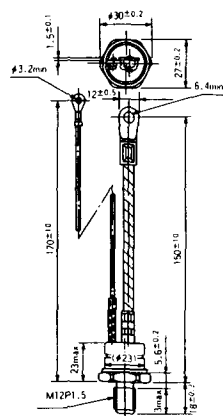


SA-6

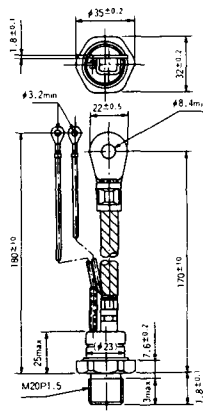


SA-7

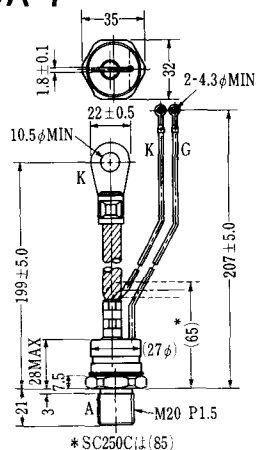


SA-8

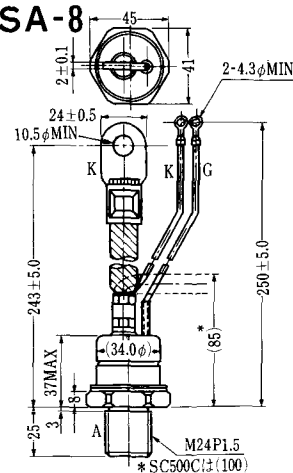


SA-9

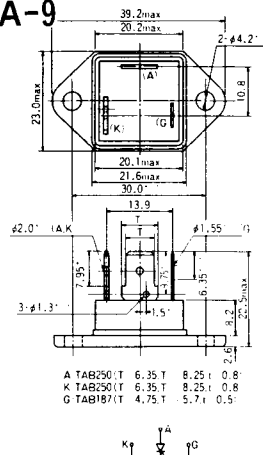


SA-10

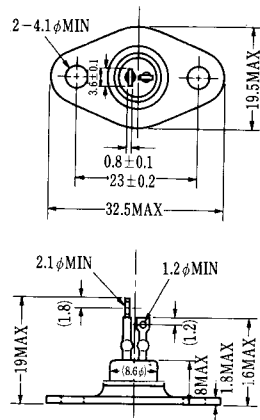


SA-11

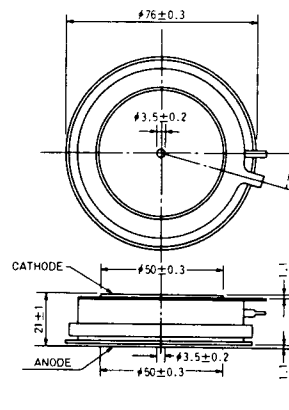

SA-12

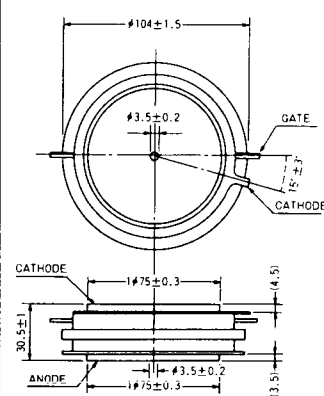


SAT-1

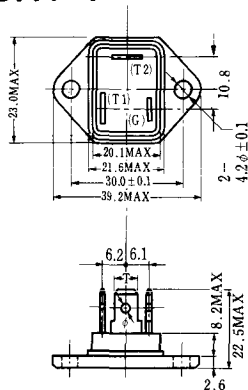


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)


SAT-2

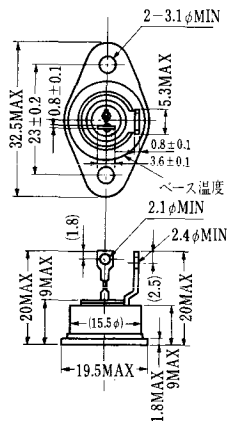


SAT-3

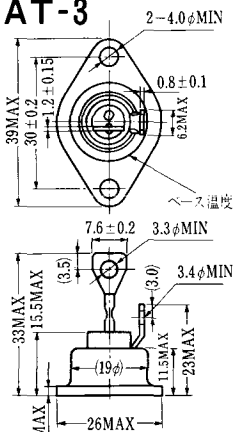


SAT-4

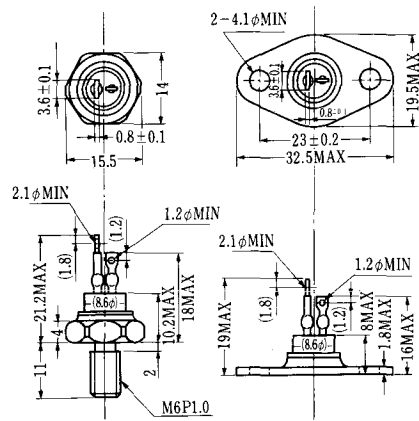


SAT-5

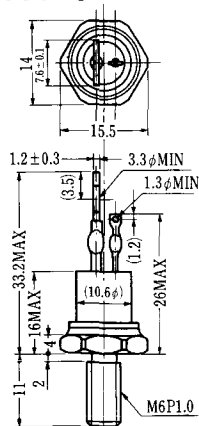


SAT-6

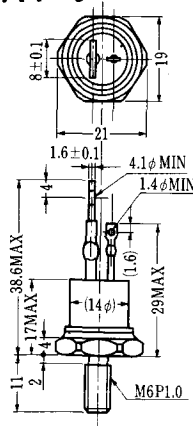


SAT-7

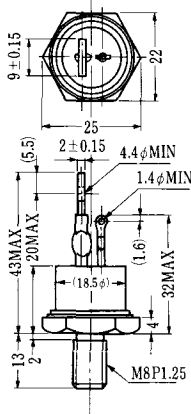


SAT-8

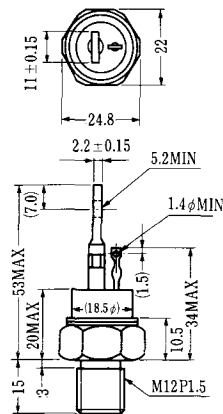


SAT-9.

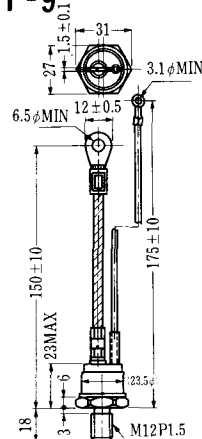


SAT-10

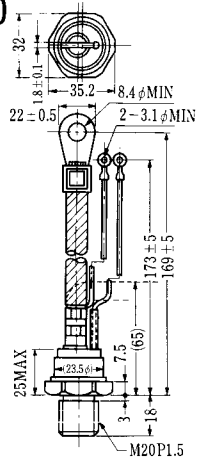


SAT-11

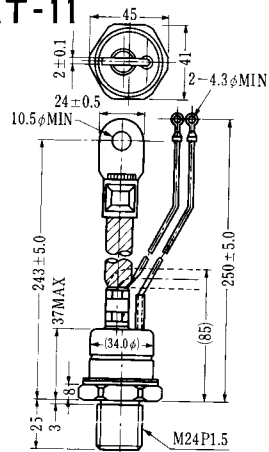


SY-1(1096A)




SY-2(1151)

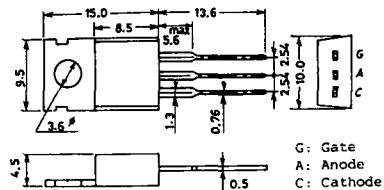


SY-3(1104)



SY-4(1150)

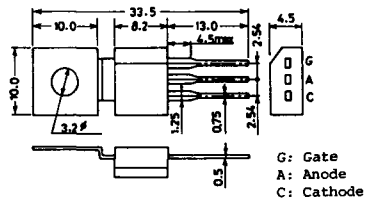


1097A




G: Gate


1102




1141




1142




1144

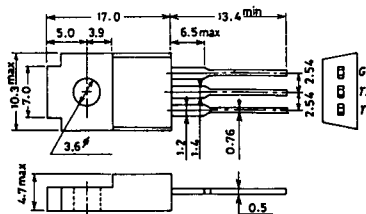

1155

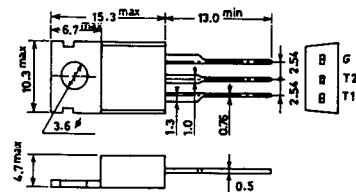


1192A




G: Gate


T-1 (13-5A1A)

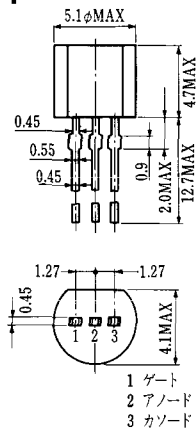


T-2 (13-8A1A)

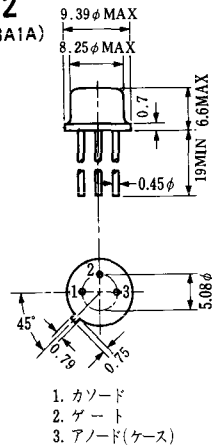


T-3 (13-8C1A)

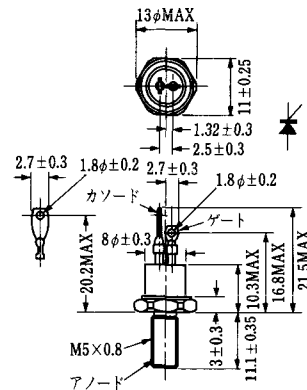


T-4 (13-10A1A)

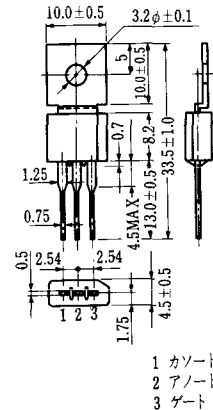


T-5 (13-10B1A)

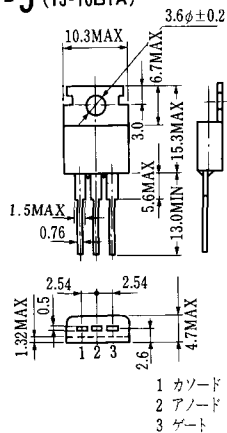


T-6 (13-11D1A)

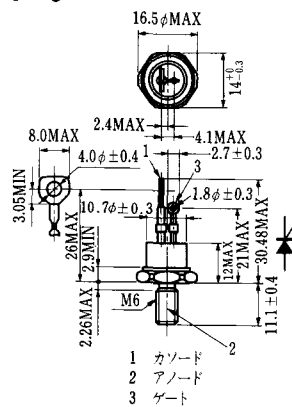


T-7 (13-13A1A)

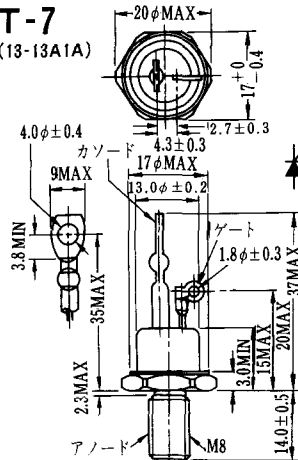


T-8 (13-13B1A)

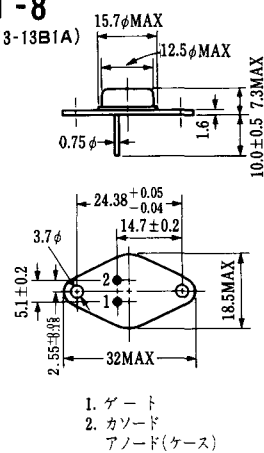


T-17 (13-42A1A)

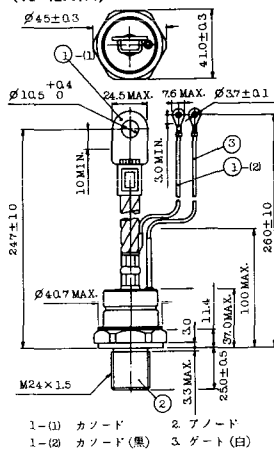


T-18 (13-45D1A)

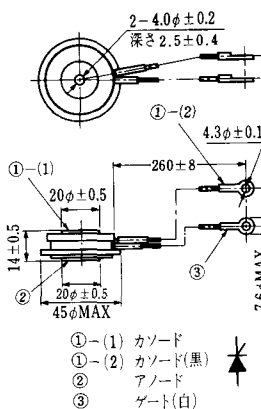


T-19 (13-52B1A)

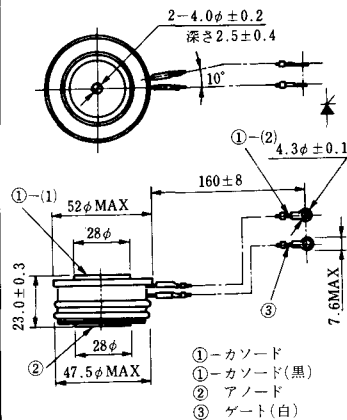


T-20 (13-52C1A)

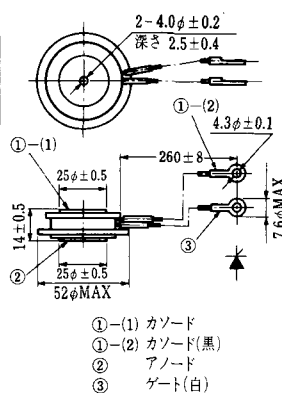


T-21 (13-60A1A)

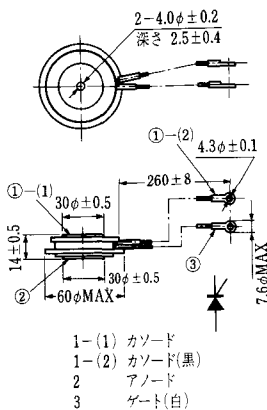


T-22 (13-70C1A)








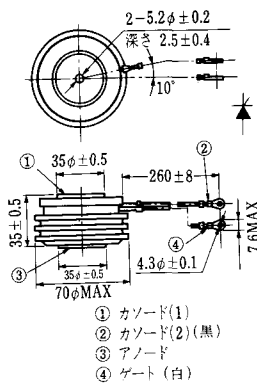


T-23 (13-78A1A)

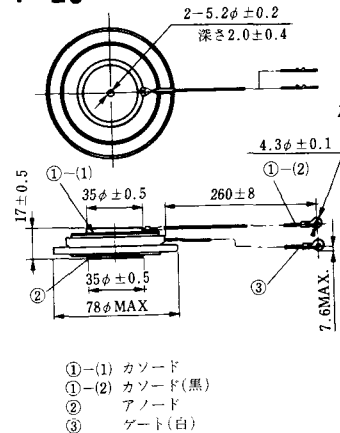


T-24 (13-100C1A)

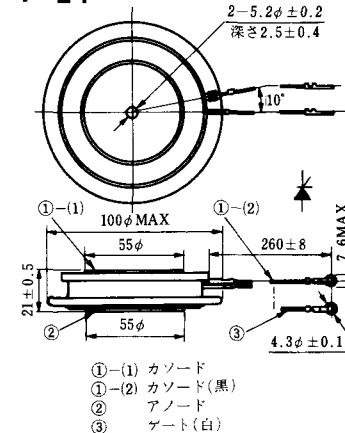

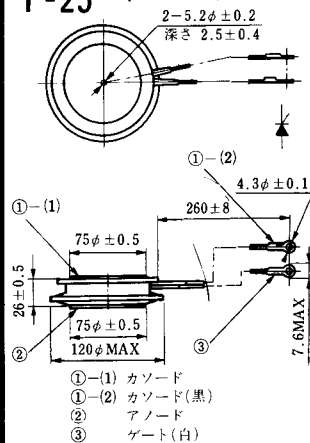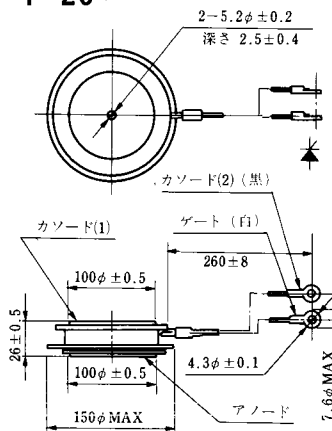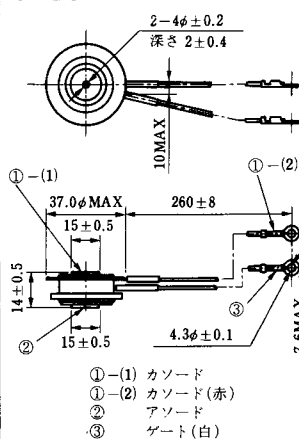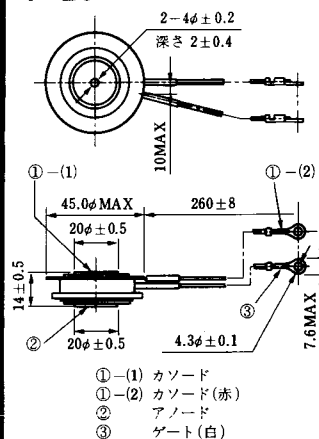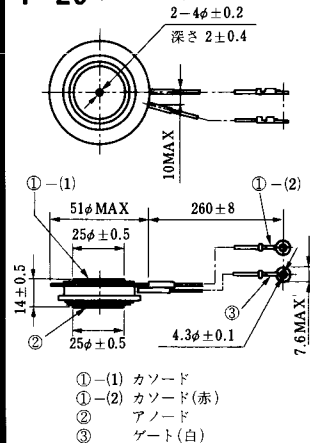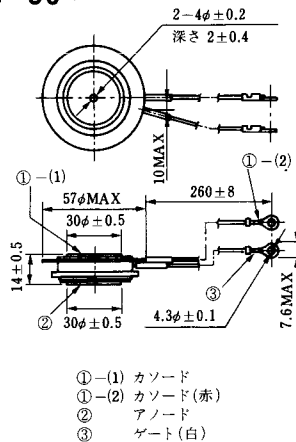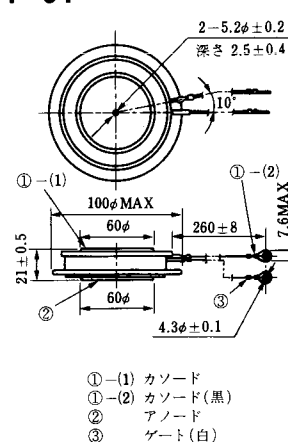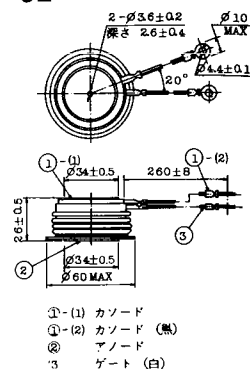
T-25 (13-120A2A)**T-26** (13-150A1A)**T-27** (13-37A1A)**T-28** (13-45E1A)**T-29** (13-51A1A)**T-30** (13-57A1A)**T-31** (13-100E1A)**T-32** (13-60E3A)

T-33 (13-78B1A)




- ① カソード
② アノード
③ ゲート

T-34 (13-66A1A)

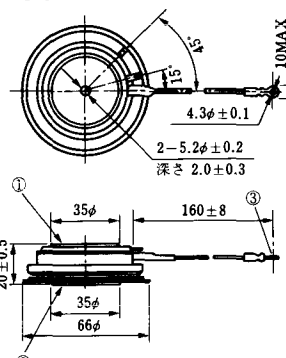


- ① カソード
② アノード
③ ゲート

T-35 (13-100D1A)

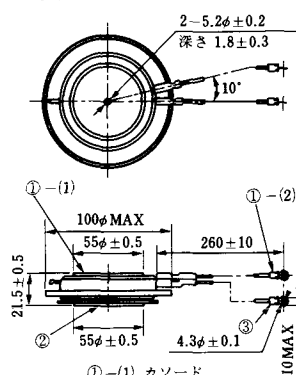


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-36 (13-120E1A)

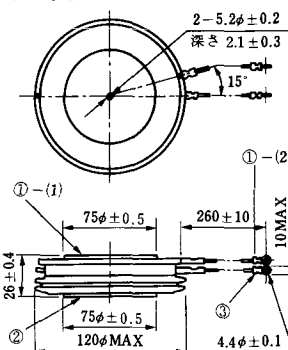


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-37 (13-120A1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-38 (13-120C1A)




- ① カソード
② アノード
③ ゲート

T-39 (13-80B1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-40 (13-28A1A)

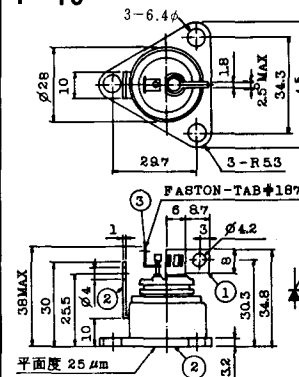


1. カソード
2. アノード
3. ゲート


T-41 (13-28A2A)

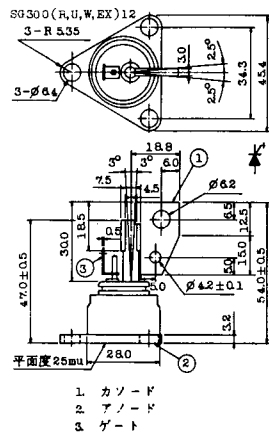


T-42 (13-45F1A)

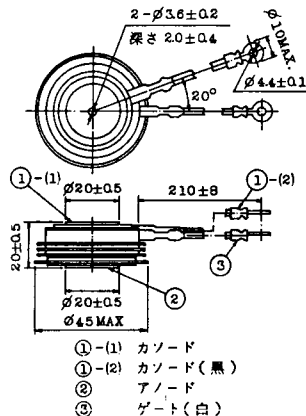


T-43 (13-60E2A)

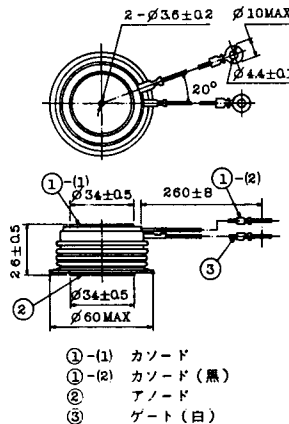


T-44 (13-36A1A)

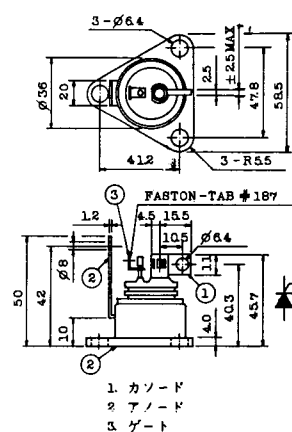


T-45 (13-51B1A)

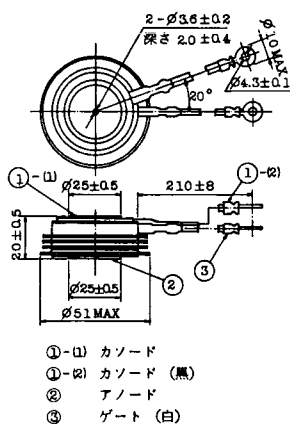


T-46 (13-36B1A)

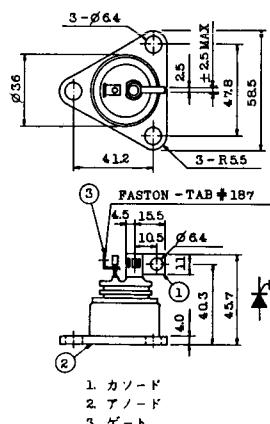


T-47 (13-60E1A)

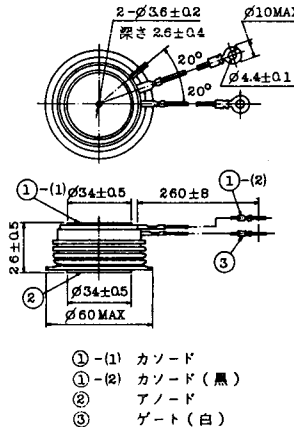


T-48 (13-93C1A)

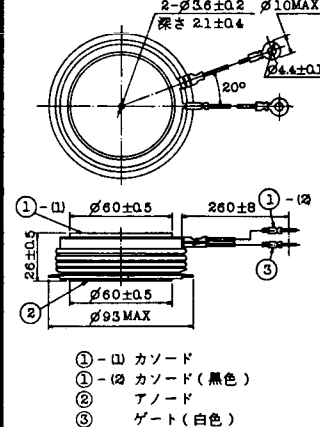


T-49 (13-75A1A)

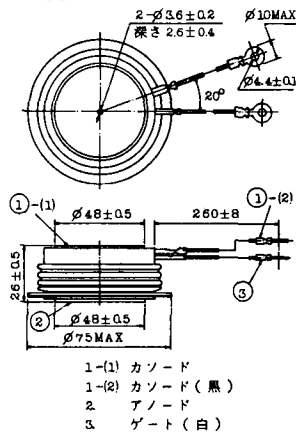


T-50 (13-10A3A)

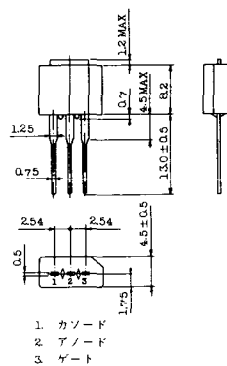


T-51 (13-10D1A)

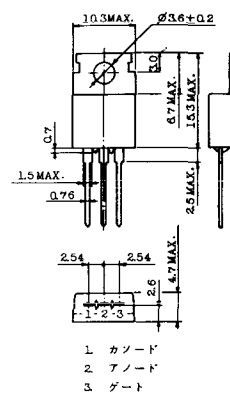


T-52 (13-10D2A)

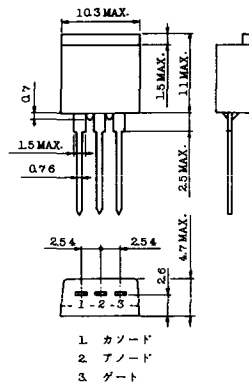


T-53 (13-10E1B)

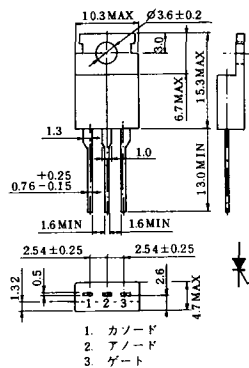


T-54 (13-10F1B)

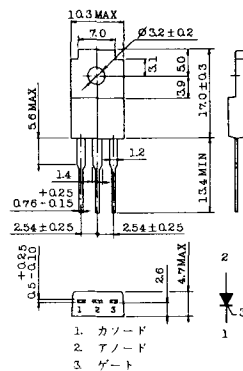


T-55 (13-5A1D)

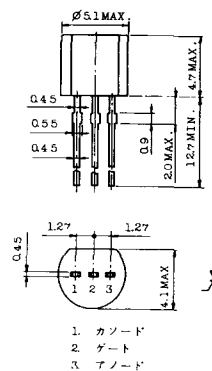


T-56 (13-13C1A)

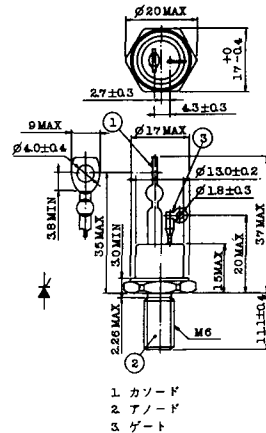


T-57 (12-16C1A)

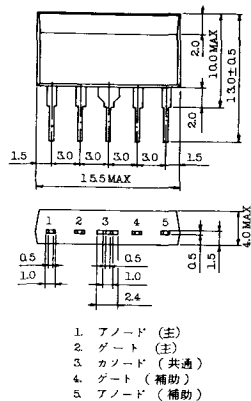


T-58 (13-10H1B)

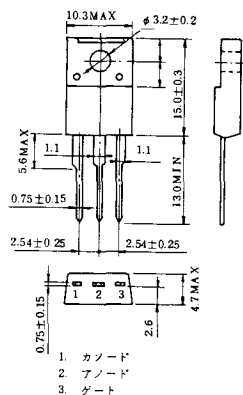


T-59 (13-120A1A)

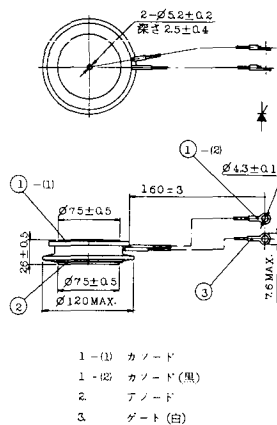


T-60

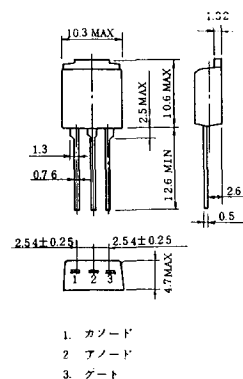


T-61 (13-5B1A)

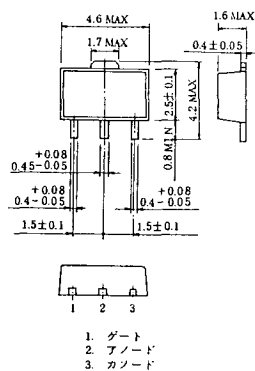


T-62 (13-10H1A)

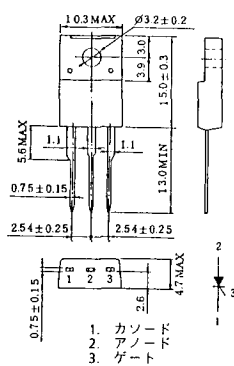


T-63 (13-16A1B)

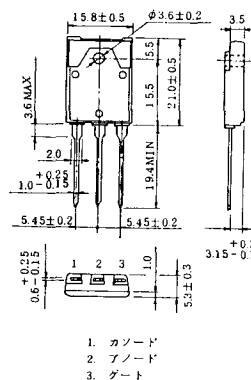


TT-1

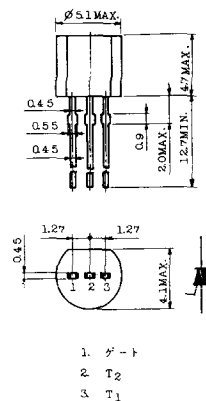


TT-2

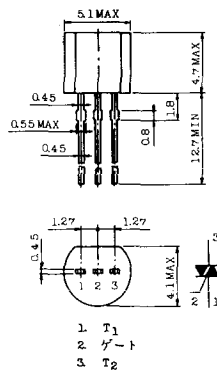


TT-3

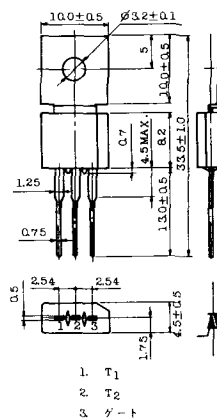


TT-4

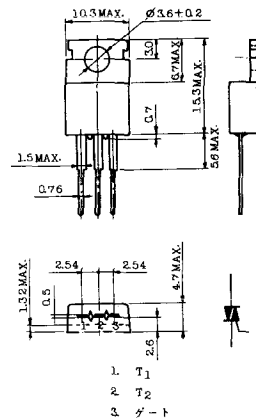


TT-5

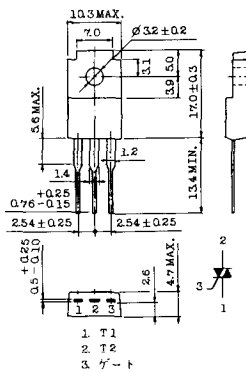


TT-6

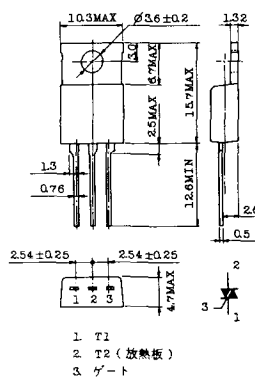


TT-7

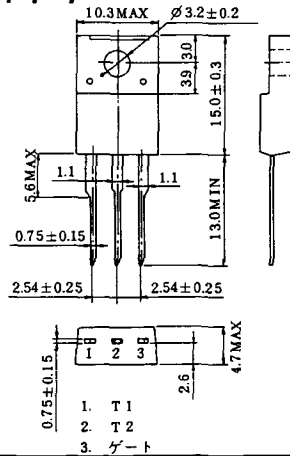

TT-8

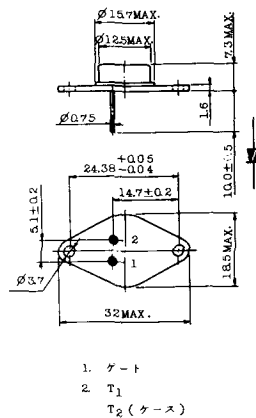


TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10




1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

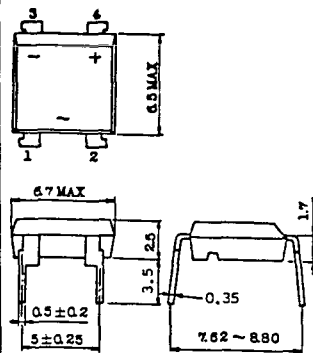


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

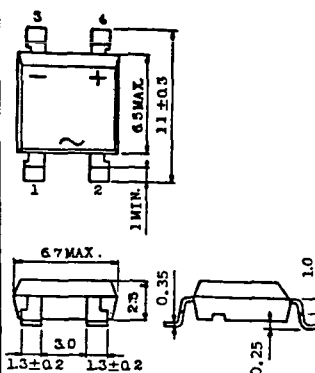


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)




1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)




1. T₁
2. T₂
3. ゲート


TS-1

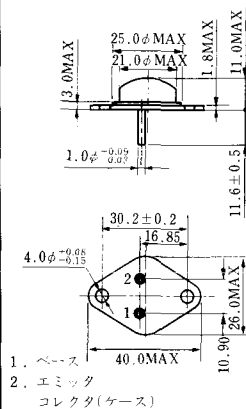


TS-2

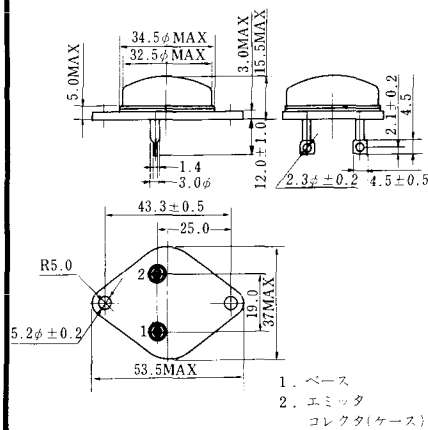


TS-3

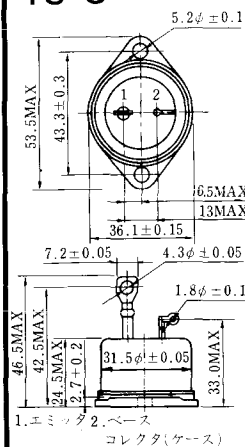


TS-4

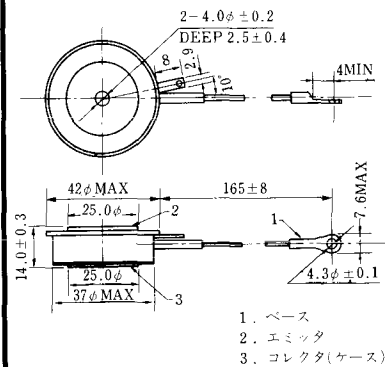


TS-5





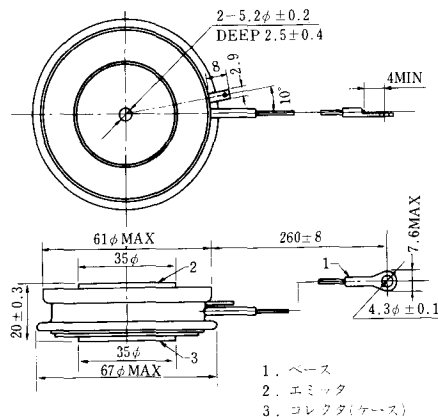


TS-6

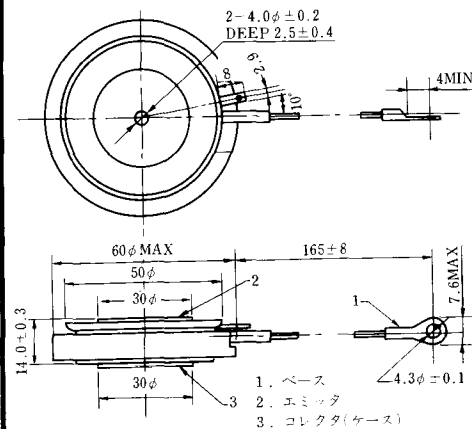


TS-7

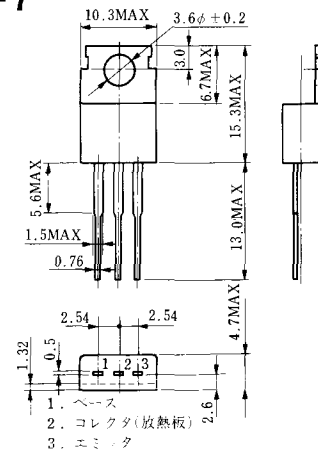





S-94B2A

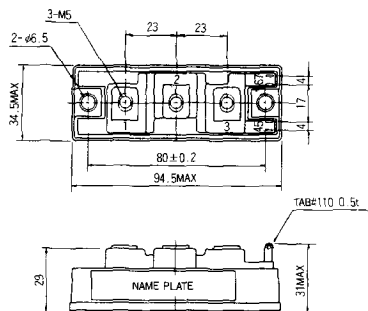


S-94D1A

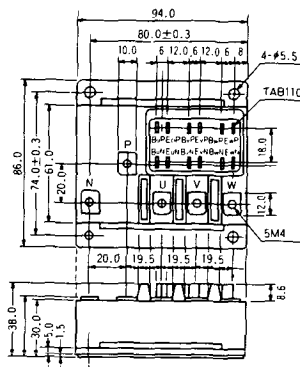


S-95A1A




S-95B1A

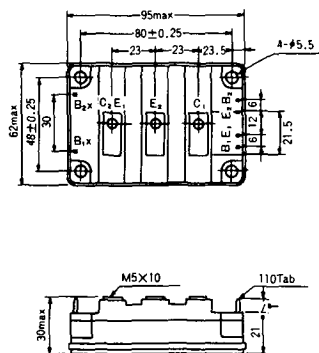


S-98B1B

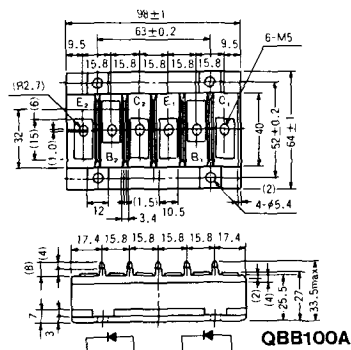


S-108A2A




S-108B1A

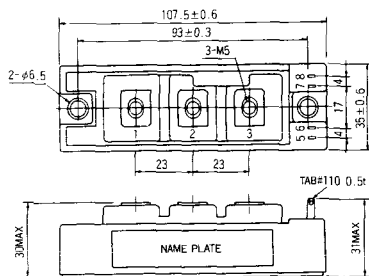


S-108B1B




S-108B1C

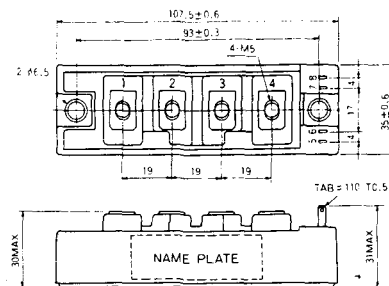


S-108B2A

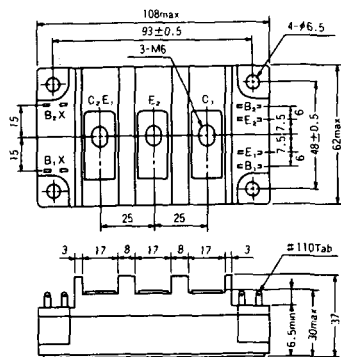


S-108B2B

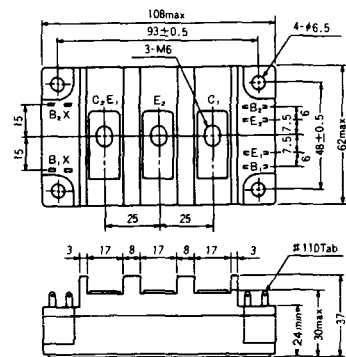


2-22B1A

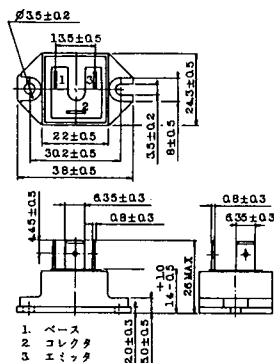


2-27A4A




2-33C1A

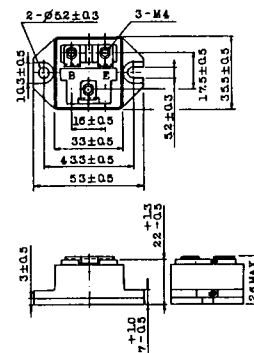


2-33D1A




2-33F1A

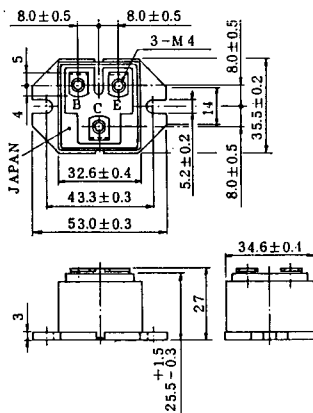


2-37A1A

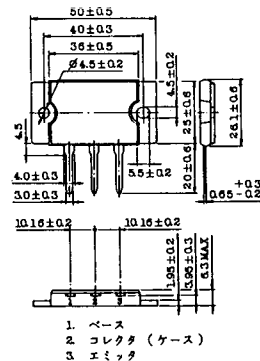


2-48A3A




2-48A3B




2-48A4A




2-64A2A

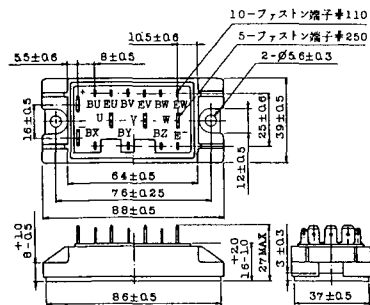


2-64A2B

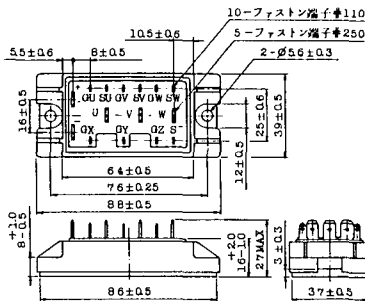


2-68A2A

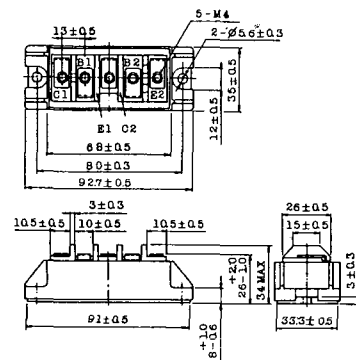


2-68B2A

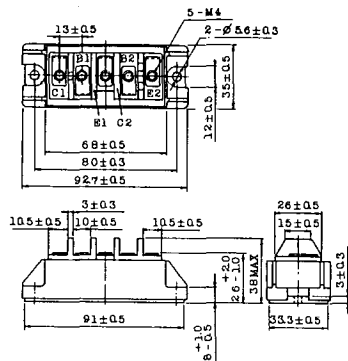


2-68C1A

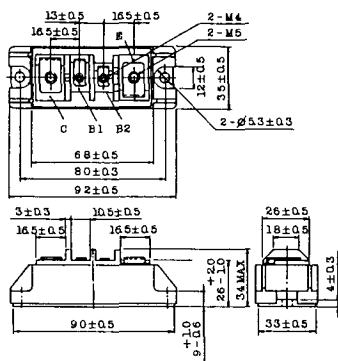


2-68D2A

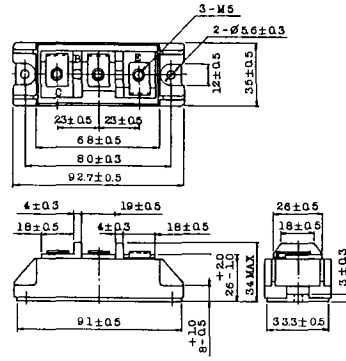


2-72A3A

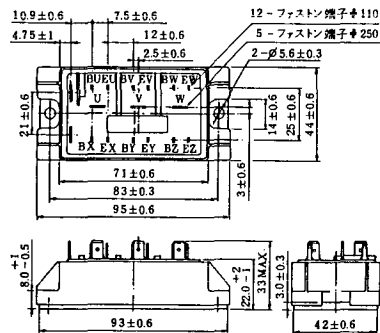


2-80A1A

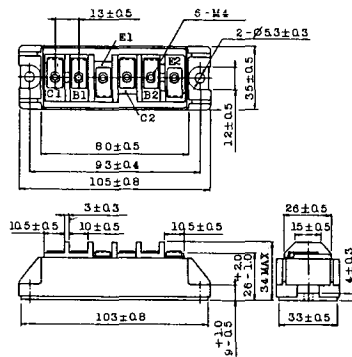


2-80B1A




2-80C1A

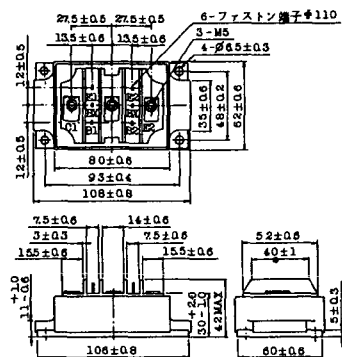


2-80D2A

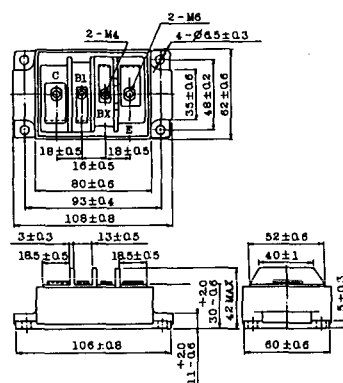


2-94A2A

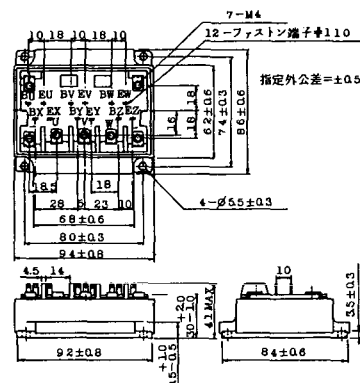


2-94B1A

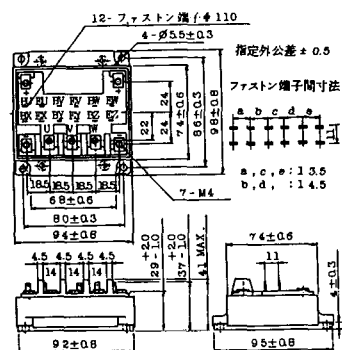


2-94C2A

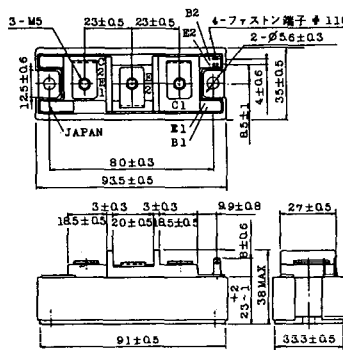


2-94C3A

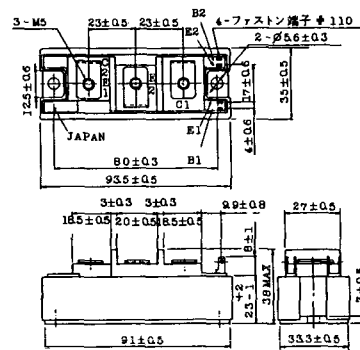


2-108B1A

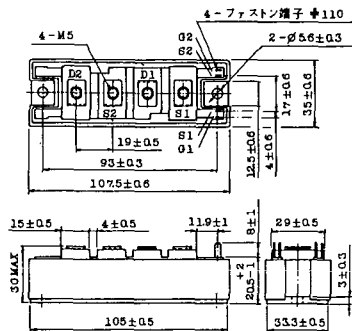


2-109A3A

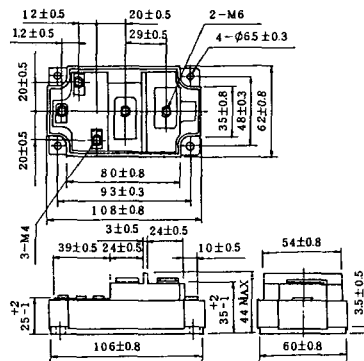


2-109A4A

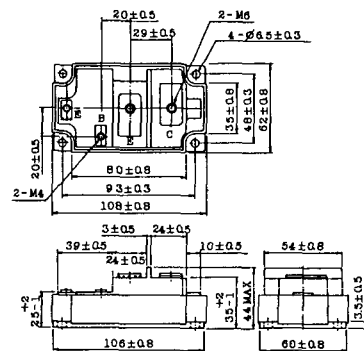

2-109B3A

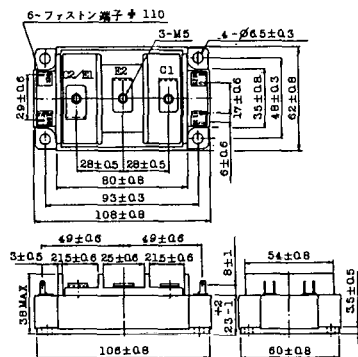


2-109B4A

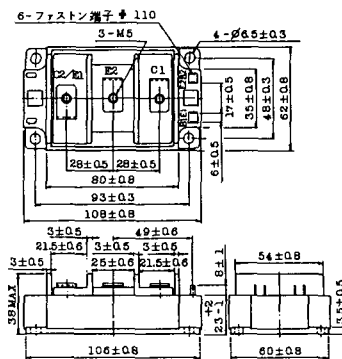


BBT-II

BBTII
1D200A-020




BBT-III

BBTIII
ETN31-055
ETM36-030
ETN36-030
ETN35-030

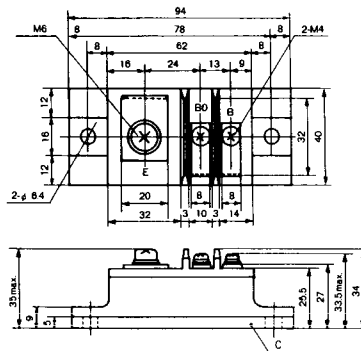


BBT-III

BBTIII
ETN01-055
ET1257

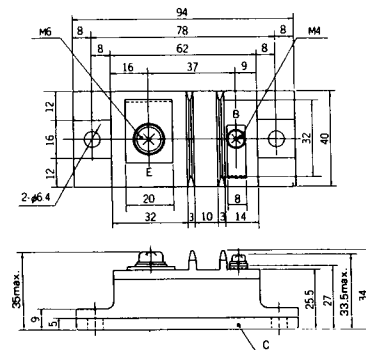


BBT-IV


BBTIV
1D500A-030

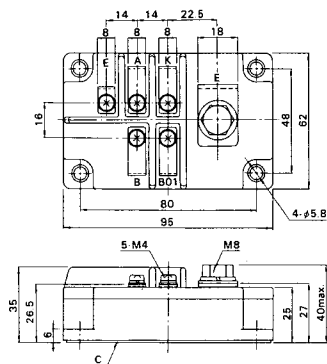


M-107

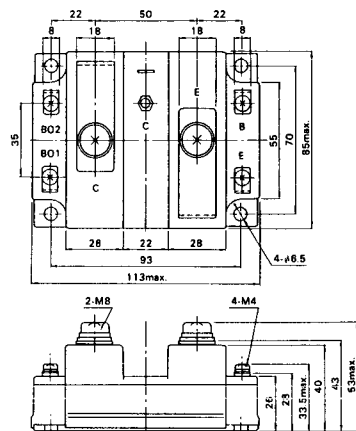


M-116




M-201




M-202

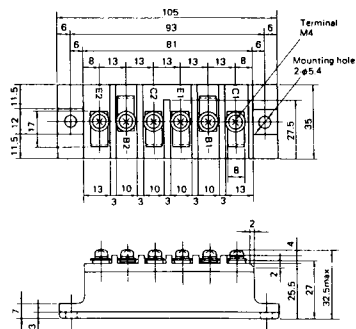


M-203

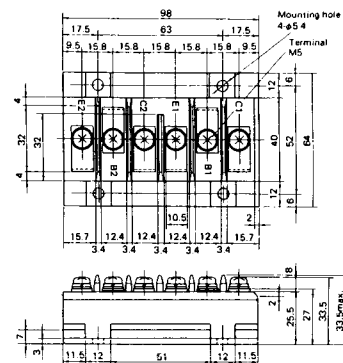


M-204

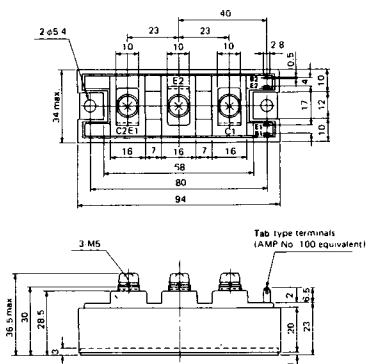


M-205

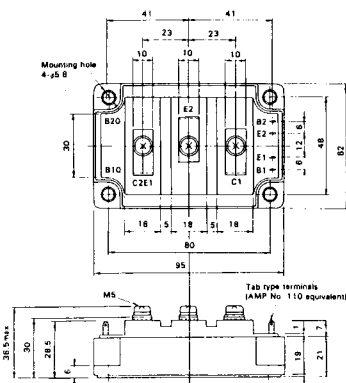


M-206

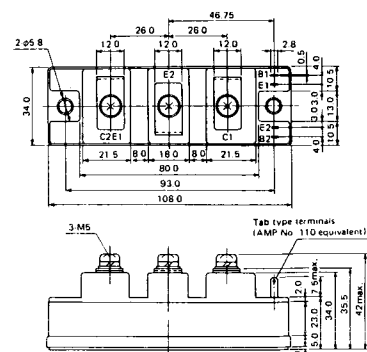


M-207

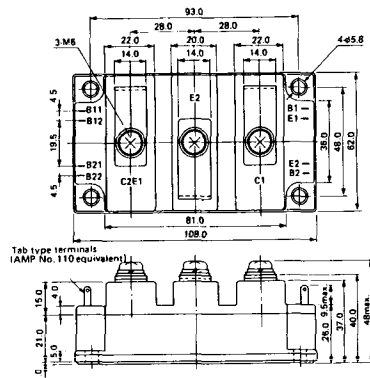


M-208

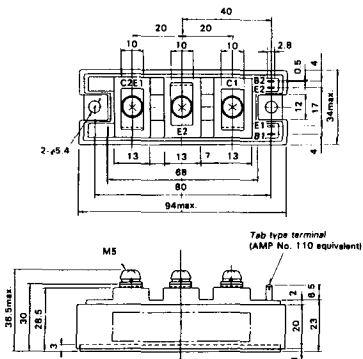


M-209

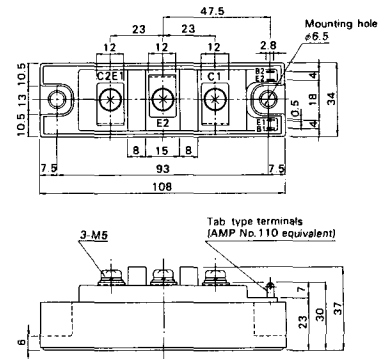


M-210


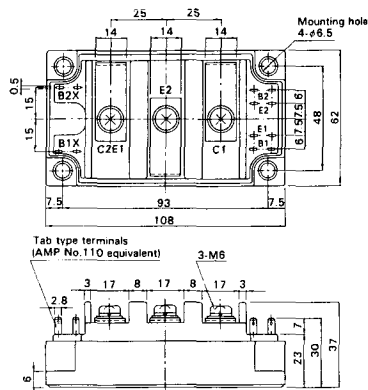


M-211





M-212







M-215




M-217




M-218




M-601

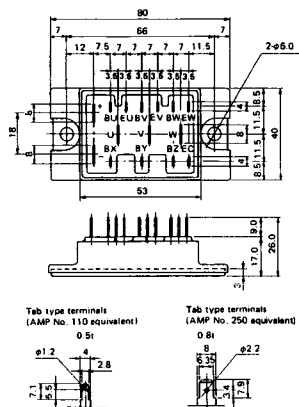


M-602

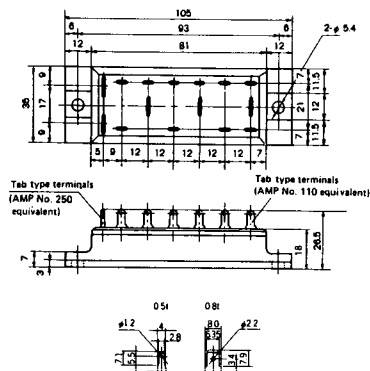


M-603

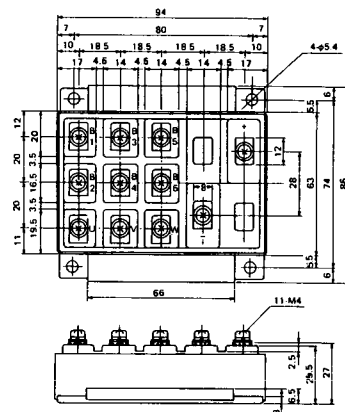


M-604




M-605

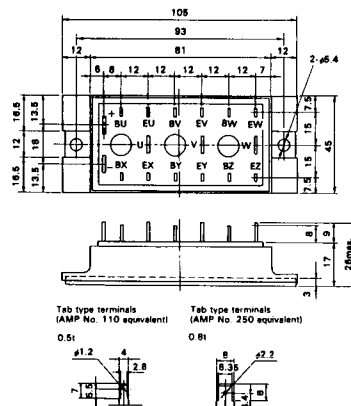


M-606




M-607




M-608




M-609




M-610




M-616




M-2E6A

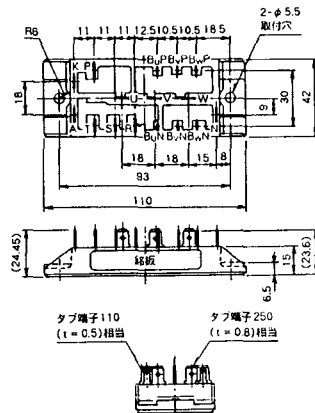


M-2F6A




M-2G6A

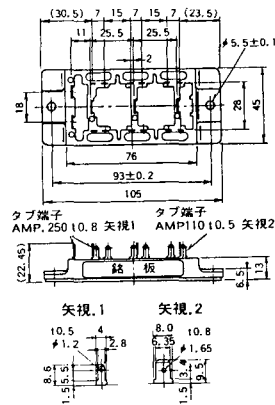


M-3A1A




M-3B1A




M-3B1B

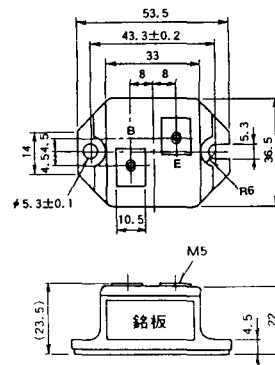


M-3C1A

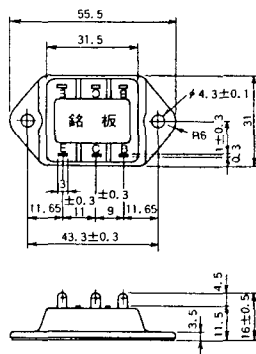


M-3D6A

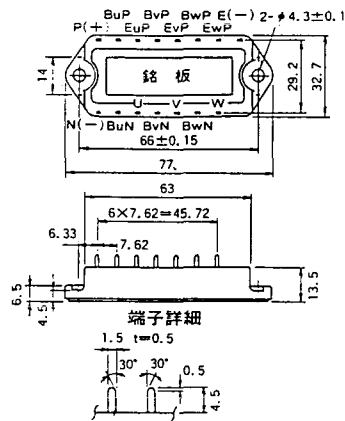


M-3E6A

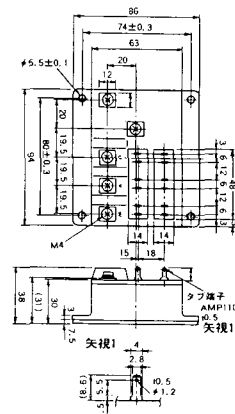


M-4A1A




M-4A2A




M-4A1B




M-4A2B




M-4B2A




M-5A1A




M-5A1B




M-5A2A




M-5B2A




M-5C2A




M-5D2A




M-6A1A

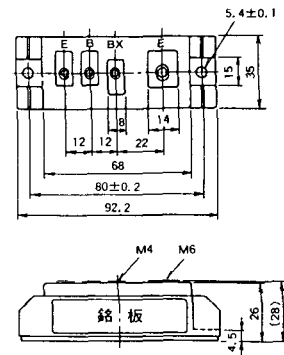


M-7A1A

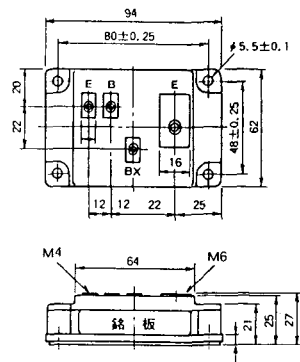


M-7B1A




M-8A1A




M-8A1B




M-8A2A




M-8A2B




M-8B2A

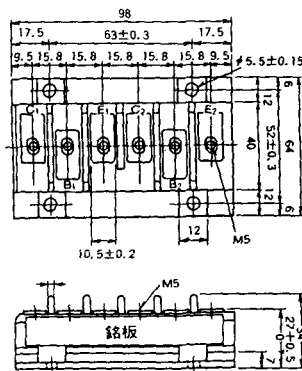


M-9A1A




M-9A2A




M-9B1A




M-9C2A




M-1A1B

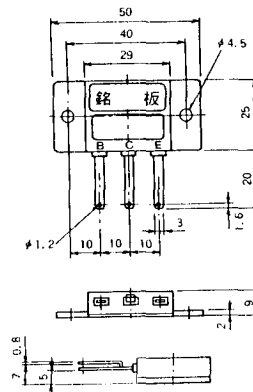


M-1A1C




M-2E6B

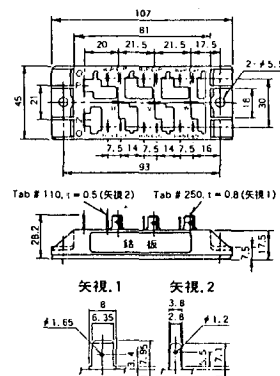


M-2E6C




M-10A2A




M-10A2B




M-11A2A

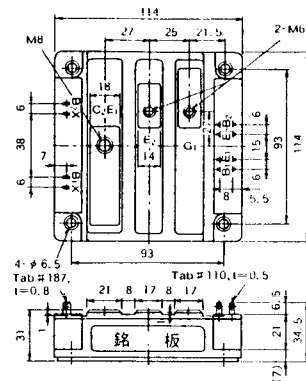


M-12A6A

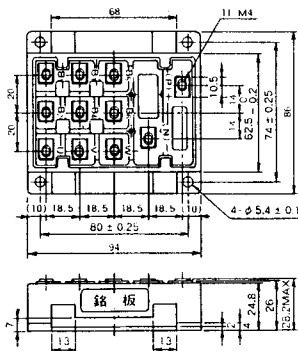


M-12B6A




M-12B6B

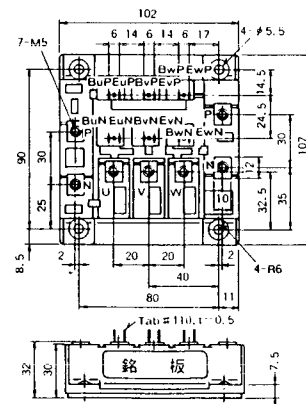


M-4A2D

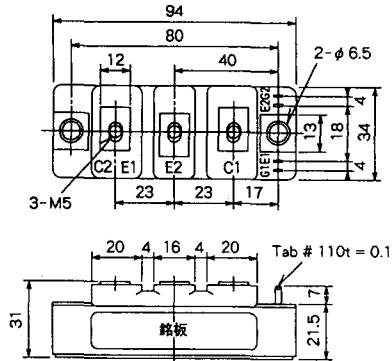


M-4A2E

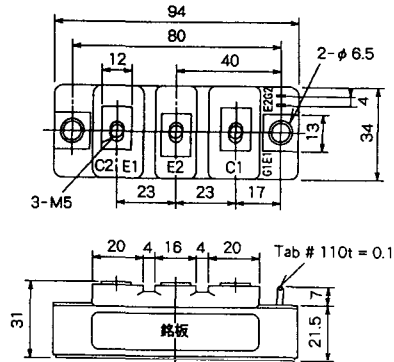


M-4C2A

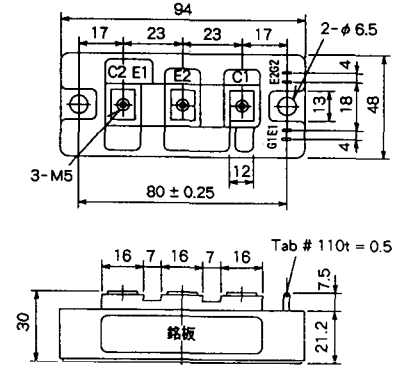


M-4C2B

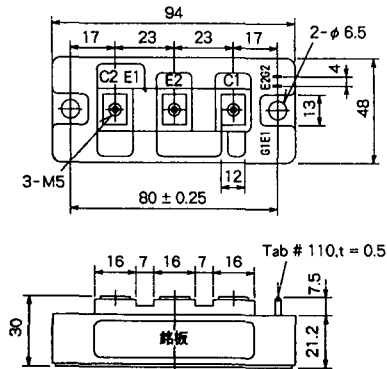


M-9B1C

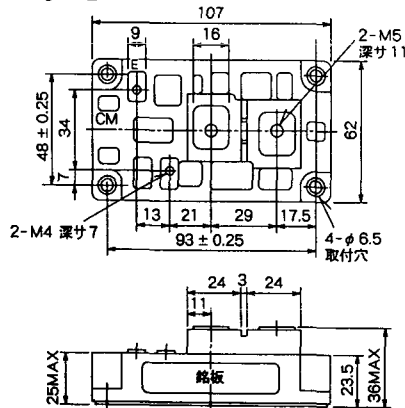


M-9D2A

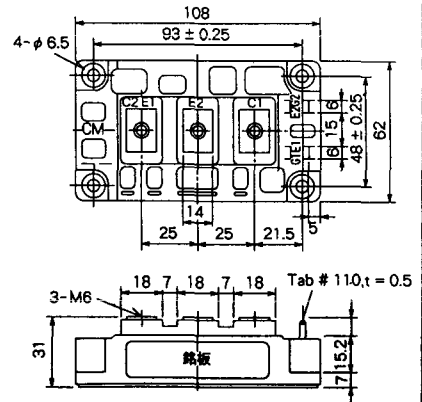




M-9D2B

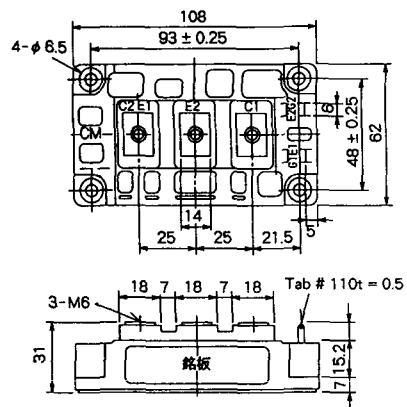

M-10A2C

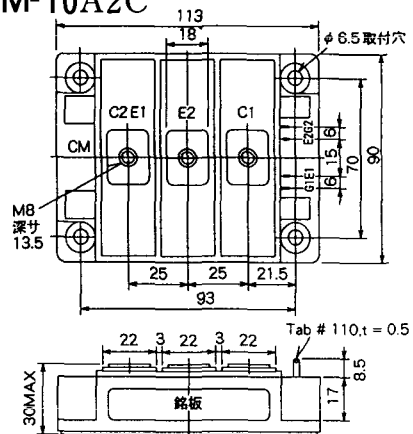


H-101

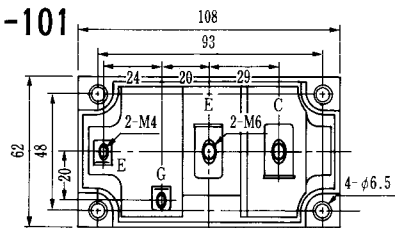


Weight :480g

TERMINALS



H-201

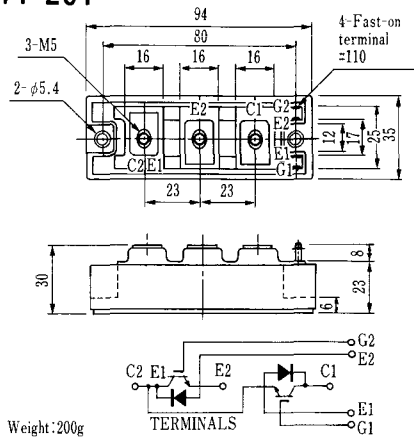



H-202

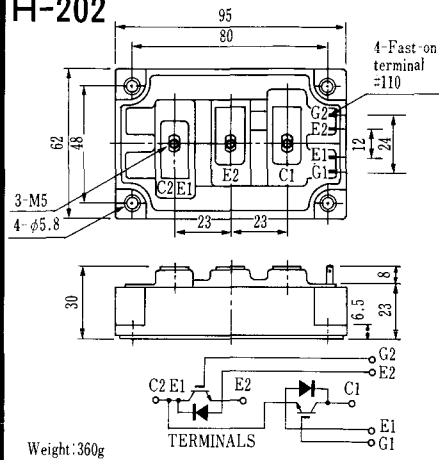


LF-J

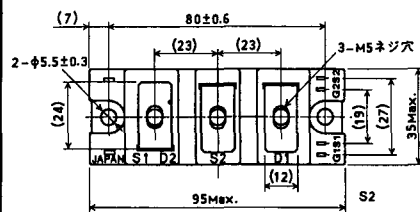


LF-K

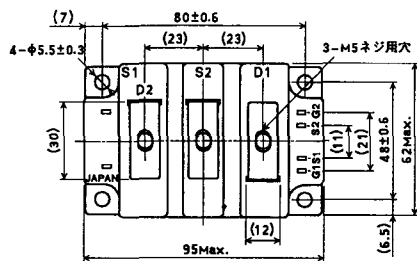


U-1

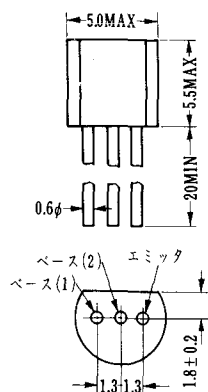


U-2

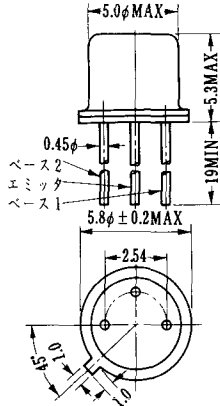


U-3

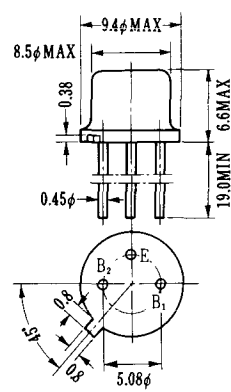

U-4

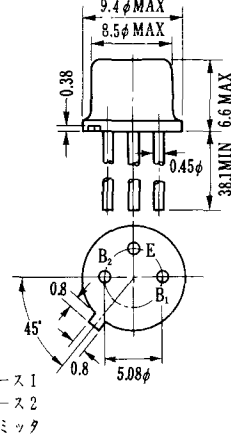


U-5

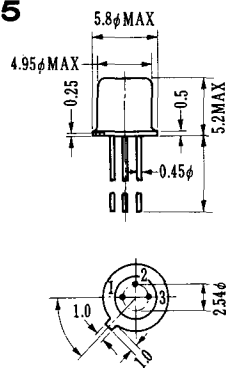


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

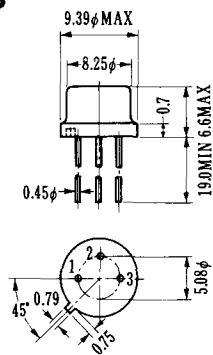

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

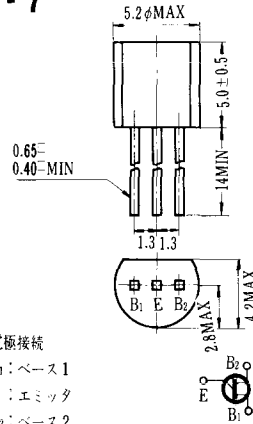

U-8

