



2 M B I 1 5 0 J - 0 6 0 (TENTATIVE)

Unit : mm

* Isolation Voltage : AC 2500 V 1 minute

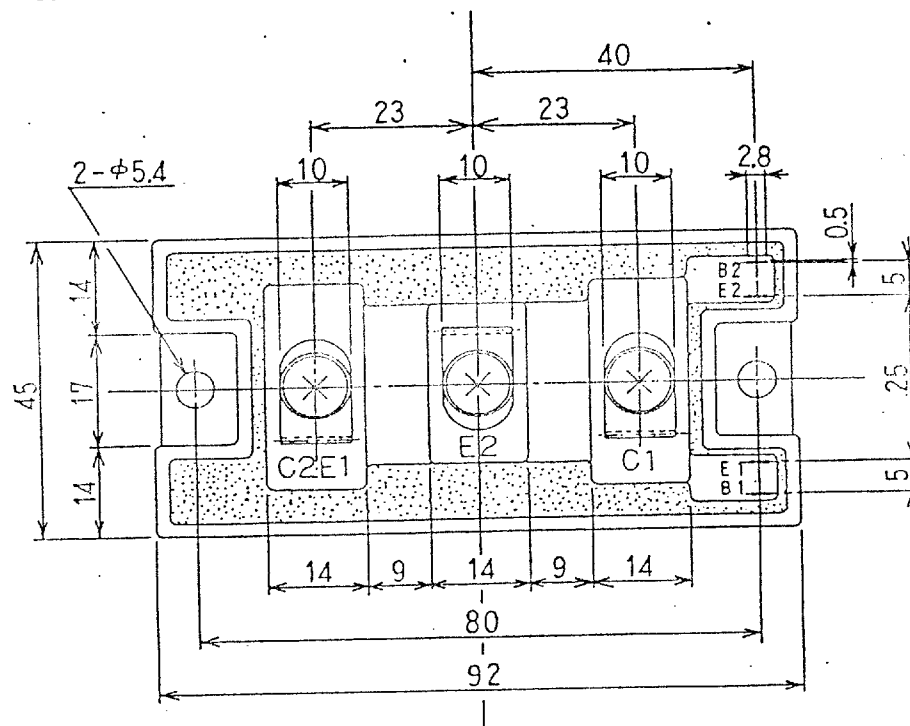


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

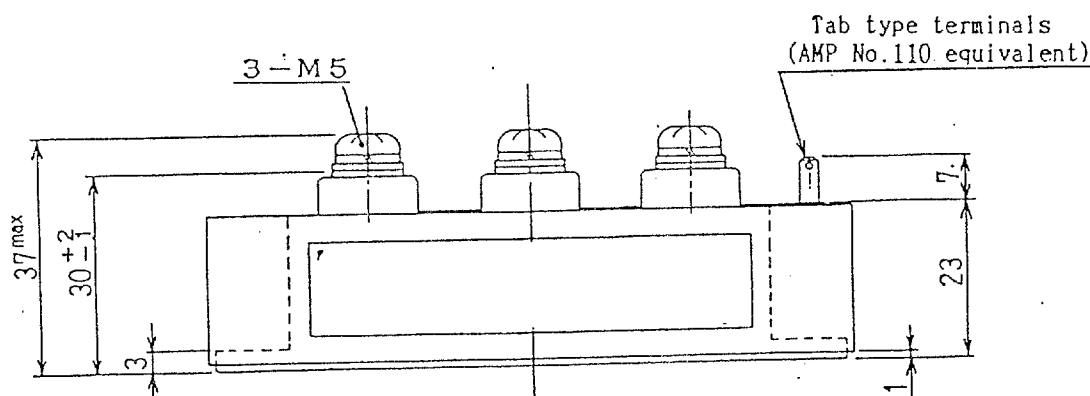

MA4LE

2238792 0002440 131 COL

2. Equivalent Circuit

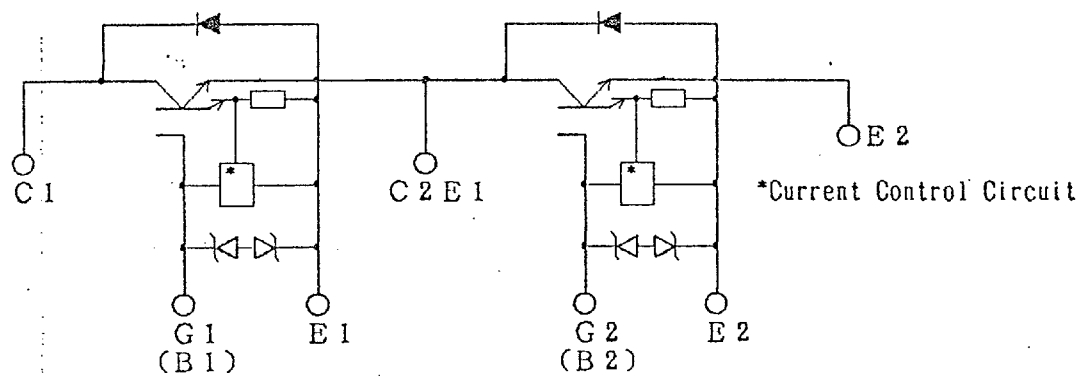

3. Absolute Maximum Ratings (Tj=25 °C)

Items		Symbols	Ratings	Units
Collector-emitter voltage		V_{CES}	600	V
Gate-emitter voltage		V_{GES}	± 20	V
Collector current	Continuous	I_c	150	A
	1 ms	I_c pulse	300	
		$-I_c$	150	
	1 ms	$-I_c$ pulse	300	
Max.power dissipation		PC	450	W
Operating temperature		Tj	+150	°C
Storage temperature		Tstg	-40 ~ +125	°C
Isolation voltage		Vis	AC 2500 (1 min)	V
Screw Torque		Mounting * 1	3.5	N · m
		Terminals * 1	3.5	

Note : *1 Recommendable Value : 2.5 ~ 3.5 N · m (M5)

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	DWG. NO.	MT5F 4706	2/11	A B C D	
	DRAWN	-	-						
	CHECKED	-	-						

MA4LE

2238792 0002441 078 COL

4. Static electrical characteristics (at $T_j=25^{\circ}\text{C}$ unless otherwise specified)

Items	Symbols	Characteristics			Conditions		Units
		min.	typ.	max.			
Zero gate voltage collector current	I_{CBS}			2.0	$T_j = 25^{\circ}\text{C}$	$V_{\text{GR}} = 0\text{V}$	mA
					$T_j = 125^{\circ}\text{C}$	$V_{\text{CB}} = 600\text{V}$	mA
Gate-emitter leakage current	I_{GBS}			30	$V_{\text{CB}} = 0\text{V}$ $V_{\text{GE}} = \pm 2.0\text{V}$		μA
Gate-emitter threshold voltage	$V_{\text{GB}}(\text{th})$	3.5	5.0	6.5	$V_{\text{CB}} = 2.0\text{V}$ $I_{\text{C}} = 150\text{mA}$		V
Collector-emitter saturation voltage	$V_{\text{CE}}(\text{sat})$		1.7	2.5	$V_{\text{CB}} = 15\text{V}$ $I_{\text{C}} = 150\text{A}$		V

5. Dynamic ratings (at $T_j=25^{\circ}\text{C}$ unless otherwise specified)

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Input capacitance	C_{ies}		9600		$V_{\text{GR}} = 0\text{V}$	pF
Output capacitance	C_{oes}				$V_{\text{CB}} = 1.0\text{V}$	
Reverse transfer capacitance	C_{res}				$f = 1\text{MHz}$	
Turn-on time	t_{on}		0.6	1.2	$V_{\text{CC}} = 300\text{V}$ $I_{\text{C}} = 150\text{A}$ $V_{\text{CE}} = \pm 15\text{V}$ $R_{\text{C}} = 12\Omega$	μs
	t_{r}		0.2	0.6		
Turn-off time	t_{off}		0.8	1.5		
	t_{f}		0.15	0.35		

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS	DATE	NAME	APPROVED	Fujitsu Electric Co., Ltd.	DWG. NO.	MT5F4706	3/11	a	b	c	d	
	DRAWN	- - -										
	CHECKED	- - -										

MA4LE

2238792 0002442 T04 COL

6. Characteristics of reverse diode (at $T_j=25^{\circ}\text{C}$ unless otherwise specified)

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Diode forward on-voltage	V_F		2.3	3.0	$I_F=150\text{A}$ $V_{GE}=0\text{V}$	V
Reverse recovery time	t_{rr}			300	$I_F=150\text{A}$ $-di/dt=450\text{A}/\mu\text{s}$	ns

7. Thermal resistance characteristics

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Thermal resistance	$R_{th(j-c)}$			0.278	IGBT	$^{\circ}\text{C}/\text{W}$
	$R_{th(j-c)}$			0.533	Diode	
	$\ast$ $R_{th(c-f)}$		0.025		the base to cooling fin	

$\ast$ This is the value which is defined mounting on the additional cooling fin with thermal compound.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	DWG. NO.	MT5F 4706	4/11	<table border="1"> <tr><td>1</td></tr> <tr><td>2</td></tr> <tr><td>3</td></tr> <tr><td>4</td></tr> </table>	1	2	3	4
	1											
	2											
3												
4												
DRAWN	- -											
CHECKED	- -											

MA4LE

2238792 0002443 940 COL