- ダーリントン・トランジスタ2個内蔵（直列接続）
- フリーホイル・ダイオード付
- 絶縁形
- UL認定品あり

Yellow Card No. : E80276 (N)
File No. : E80271

■等価回路

DX 1B




DX 2A




DY-1A




注1. $I_C$=1A, $V_{EB}$=2V, #印は$V_{CEX}$（$V_{EB}$−2V）。　注2. 60Hz, 単相半波1サイクル波高値。　注3. $T_C$=25℃。　注4. AC, 1分間。

| 型名 | 最大定格 ($T_J$=25℃) | | | | | | | | | | | 電気的特性 | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | $V_{CBO}$ | $V_{CEX(SUS)}$ (注1) | $V_{EBO}$ | $I_C$ | $I_B$ | $I_F$ | $I_{FM}$ (注2) | $P_C$ (注3) | $T_j$ | $T_{stg}$ | $V_{iso}$ (注4) | $I_{CEX}$ | | | $I_{EBO}$ | | $V_{CEO(SUS)}$ | | $h_{FE}$ | | |
| | (V) | (V) | (V) | (A) | (A) | (A) | (A) | (W) | (℃) | (℃) | (V) | (mA) 最大 | $V_{CE}$ (V) | $V_{EB}$ (V) | (mA) 最大 | $V_{EB}$ (V) | (V) 最小 | $I_C$ (A) | 最小 | $V_{CE}$ (V) | $I_C$ (A) |
| QM15DX−H | 600 | 600 | 7 | 15 | 0.9 | 15 | 150 | 100 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 80 | 7 | | | 50/100 | 2/5 | 15 |
| QM15DX−2H | 1000 | 1000 | 7 | 15 | 1.0 | 15 | 150 | 150 | 150 | −40〜125 | 2500 | 1 | 1000 | 2 | 100 | 7 | | | 75/100 | 2.8/5 | 15 |
| QM15DX−24 | 1200 | 1200 | 7 | 15 | 1.0 | 15 | 150 | 150 | 150 | −40〜125 | 2500 | 2 | 1200 | 2 | 100 | 7 | | | 75 | 5 | 15 |
| QM20DX−H | 600 | 600 | 7 | 20 | 1.0 | 20 | 200 | 160 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 150 | 7 | | | 75/100 | 2/5 | 20 |
| QM30DY−H | 600 | 600 | 7 | 30 | 1.8 | 30 | 300 | 250 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 200 | 7 | | | 75/100 | 2/5 | 30 |
| QM30DY−2H | 1000 | 1000 | 7 | 30 | 2.0 | 30 | 300 | 310 | 150 | −40〜125 | 2500 | 1 | 1000 | 2 | 200 | 7 | | | 75/100 | 2.8/5 | 30 |
| QM30DY−24 | 1200 | 1200 | 7 | 30 | 2.0 | 30 | 300 | 300 | 150 | −40〜125 | 2500 | 1 | 1200 | 2 | 200 | 7 | | | 75 | 5 | 30 |
| QM30DY−HB | 600 | 600 | 7 | 30 | 1.8 | 30 | 300 | 250 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 60 | 7 | | | 750 | 2.5 | 30 |
| QM40DY−3H | 1400 | 1400 | 7 | 40 | 4.0 | 40 | 400 | 400 | 150 | −40〜125 | 2500 | 5 | 1400 | 3 | 100 | 7 | | | 100 | 5 | 40 |
| QM50DY−H | 600 | 600 | 7 | 50 | 3.0 | 50 | 500 | 310 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 200 | 7 | | | 75/100 | 2/5 | 50 |
| QM50DY−2H | 1000 | 1000 | 7 | 50 | 3.0 | 50 | 500 | 400 | 150 | −40〜125 | 2500 | 1 | 1000 | 2 | 200 | 7 | | | 75/100 | 2.8/5 | 50 |
| QM50DY−24 | 1200 | 1200 | 7 | 50 | 3.0 | 50 | 500 | 400 | 150 | −40〜125 | 2500 | 1 | 1200 | 2 | 200 | 7 | | | 75 | 5 | 50 |
| QM50DY−HB | 600 | 600 | 7 | 50 | 3.0 | 50 | 500 | 310 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 80 | 7 | | | 750 | 2.5 | 50 |
| QM50DY−2HB | 1000 | 1000 | 7 | 50 | 3.0 | 50 | 500 | 400 | 150 | −40〜125 | 2500 | 2 | 1000 | 2 | 50 | 7 | | | 750 | 4 | 50 |
| QM75DY−H | 600 | 600 | 7 | 75 | 4.5 | 75 | 750 | 350 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 75 | 7 | | | 75/100 | 2/5 | 75 |
| QM75DY−2H | 1000 | 1000 | 7 | 75 | 4.0 | 75 | 750 | 500 | 150 | −40〜125 | 2500 | 1 | 1000 | 2 | 100 | 7 | | | 75/100 | 2.8/5 | 75 |
| QM75DY−24 | 1200 | 1200 | 7 | 75 | 4.0 | 75 | 750 | 500 | 150 | −40〜125 | 2500 | 1 | 1200 | 2 | 200 | 7 | | | 75 | 5 | 75 |
| QM75DY−HB | 600 | 600 | 7 | 75 | 4.5 | 75 | 750 | 350 | 150 | −40〜125 | 2500 | 1 | 600 | 2 | 75 | 7 | | | 750 | 2.5 | 75 |
| QM75DY−2HB | 1000 | 1000 | 7 | 75 | 4.0 | 75 | 750 | 500 | 150 | −40〜125 | 2500 | 1 | 1000 | 2 | 50 | 7 | | | 750 | 4 | 75 |
| QM80DY−3H | 1400 | 1400 | 7 | 80 | 8.0 | 80 | 800 | 800 | 150 | −40〜125 | 3000 | 10 | 1400 | 3 | 200 | 7 | | | 100 | 5 | 80 |

DY-1B




DY-2A




DY-2B




DY 3A




| ($T_j$=25℃) | | | | | | | | | | | | | エミッタ・コレクタ間ダイオード | | | | | | 熱抵抗 | | 等価回路 | 外形図 | 記事 | 型名 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 飽和電圧 (V) | | | | スイッチング時間 (μs) | | | | | | | | | $V_F$ | | $t_{rr}$ | | | | $\theta_{j-c}$ (℃/W) | | | | | |
| $V_{CE}$ | $V_{BE}$ | $I_C$ | $I_B$ | $t_{on}$ | $t_{stg}$ | $t_f$ | $I_{B1}$ | $I_{B2}$ | $V_{CC}$ | $I_C$ | (V) | $I_F$ | (μs) | $I_F$ | $V_{BE}$ | di/dt | トランジスタ部 | ダイオード部 | | | | | |
| 最大 | 最大 | (A) | (A) | 最大 | 最大 | 最大 | (A) | (A) | (V) | (A) | 最大 | (A) | 最大 | (A) | (V) | (A/μs) | 最大 | 最大 | | | | | |
| 2.0 | 2.5 | 15 | 0.3 | 1.5 | 8.0 | 3.0 | 0.3 | -0.3 | 300 | 15 | 1.5 | 15 | | | | | 1.2 | 2.5 | DX-1B | M-2B2A | UL認定済 | | QM15DX-H |
| 2.5 | 3.5 | 15 | 0.3 | 2.5 | 15 | 3.0 | 0.3 | -0.3 | 600 | 15 | 1.5 | 15 | | | | | 0.8 | 1.2 | DX-2A | M-2C2A | UL認定済 | | QM15DX-2H |
| 3.0 | 3.5 | 15 | 0.3 | 2.5 | 15 | 3.0 | 0.3 | -0.3 | 600 | 15 | 1.5 | 15 | | | | | 0.8 | 1.2 | DX-2A | M-2C2A | UL認定済 | | QM15DX-24 |
| 2.0 | 2.5 | 20 | 0.28 | 1.5 | 12 | 2.0 | 0.4 | -0.4 | 300 | 20 | 1.5 | 20 | | | | | 0.8 | 2.2 | DX-1B | M-2B2A | UL認定済 | | QM20DX-H |
| 2.0 | 2.5 | 30 | 0.4 | 1.5 | 12 | 3.0 | 0.6 | -0.6 | 300 | 30 | 1.85 | 30 | | | | | 0.5 | 2.0 | DY-1A | M-4A2A | UL認定済 | | QM30DY-H |
| 2.5 | 3.5 | 30 | 0.6 | 2.5 | 15 | 3.0 | 0.6 | -0.6 | 600 | 30 | 1.8 | 30 | | | | | 0.4 | 1.5 | DY-2A | M-4A2A | UL認定済 | | QM30DY-2H |
| 3.0 | 3.5 | 30 | 0.6 | 2.5 | 15 | 3.0 | 0.6 | -0.6 | 600 | 30 | 1.8 | 30 | | | | | 0.4 | 1.5 | DY-2A | M-4A2A | UL認定済 | | QM30DY-24 |
| 2.5 | 3.0 | 30 | 0.04 | 2.0 | 8.0 | 3.0 | 0.06 | -0.6 | 300 | 30 | 1.8 | 30 | | | | | 0.5 | 2.0 | DY-2A | M-4A2B | UL認定済 | | QM30DY-HB |
| 3.0 | 3.5 | 40 | 0.8 | 3.0 | 20 | 3.0 | 0.8 | -0.8 | 800 | 40 | 1.8 | 40 | | | | | 0.31 | 1.2 | DY-2A | M-5B2A | UL認定済 | | QM40DY-3H |
| 2.0 | 2.5 | 50 | 0.65 | 1.5 | 12 | 3.0 | 1.0 | -1.0 | 300 | 50 | 1.75 | 50 | | | | | 0.4 | 1.3 | DY-1A | M-4A2A | UL認定済 | | QM50DY-H |
| 2.5 | 3.5 | 50 | 1.0 | 2.5 | 15 | 3.0 | 1.0 | -1.0 | 600 | 50 | 1.8 | 50 | | | | | 0.31 | 1.2 | DY-2A | M-4A2A | UL認定済 | | QM50DY-2H |
| 3.0 | 3.5 | 50 | 1.0 | 2.5 | 15 | 3.0 | 1.0 | -1.0 | 600 | 50 | 1.8 | 50 | | | | | 0.31 | 1.2 | DY-2A | M-4A2A | UL認定済 | | QM50DY-24 |
| 2.5 | 3.0 | 50 | .067 | 2.0 | 8.0 | 3.0 | 0.1 | -1.0 | 300 | 50 | 1.8 | 50 | | | | | 0.4 | 1.3 | DY-2A | M-4A2B | UL認定済 | | QM50DY-HB |
| 4.0 | 4.0 | 50 | .067 | 2.5 | 15 | 3.0 | 0.1 | -1.0 | 600 | 50 | 1.8 | 50 | | | | | 0.31 | 1.2 | DY-3A | M-5A2A | | | QM50DY-2HB |
| 2.0 | 2.5 | 75 | 1.0 | 2.5 | 12 | 3.0 | 1.5 | -1.5 | 300 | 75 | 1.85 | 75 | | | | | 0.35 | 1.3 | DY-1A | M-4A2A | UL認定済 | | QM75DY-H |
| 2.5 | 3.5 | 75 | 1.5 | 2.5 | 15 | 3.0 | 1.5 | -1.5 | 600 | 75 | 1.8 | 75 | | | | | 0.25 | 1.2 | DY-2A | M-5A2A | UL認定済 | | QM75DY-2H |
| 3.0 | 3.5 | 75 | 1.5 | 2.5 | 15 | 3.0 | 1.5 | -1.5 | 600 | 75 | 1.8 | 75 | | | | | 0.25 | 1.2 | DY-2A | M-5A2A | UL認定済 | | QM75DY-24 |
| 2.5 | 3.0 | 75 | 0.1 | 2.0 | 8.0 | 3.0 | 0.15 | -1.5 | 300 | 75 | 1.8 | 75 | | | | | 0.35 | 1.3 | DY-2A | M-4A2B | UL認定済 | | QM75DY-HB |
| 4.0 | 4.0 | 75 | 0.1 | 2.5 | 15 | 3.0 | 0.15 | -1.5 | 600 | 75 | 1.8 | 75 | | | | | 0.25 | 1.2 | DY-3A | M-5A2A | UL認定済 | | QM75DY-2HB |
| 3.0 | 3.5 | 80 | 1.6 | 3.0 | 20 | 3.0 | 1.6 | -1.6 | 800 | 80 | 1.8 | 80 | | | | | 0.155 | 0.6 | DY-2B | M-9C2A | UL認定済 | | QM80DY-3H |

## FD-1

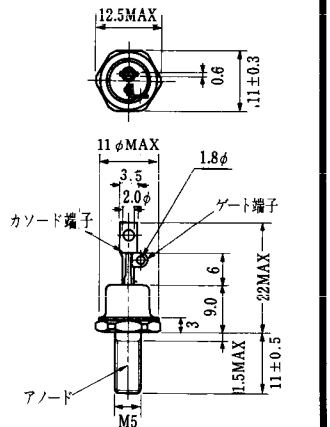


## FD-2

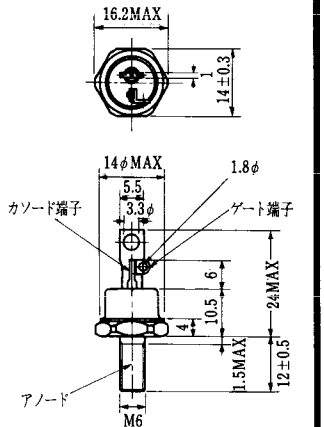


## FD-3

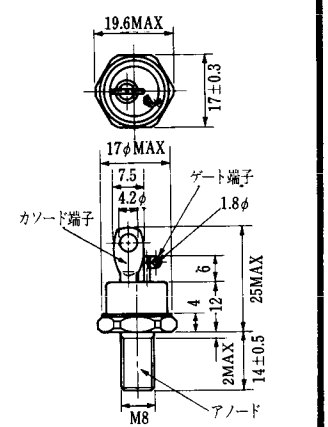


## FD-4

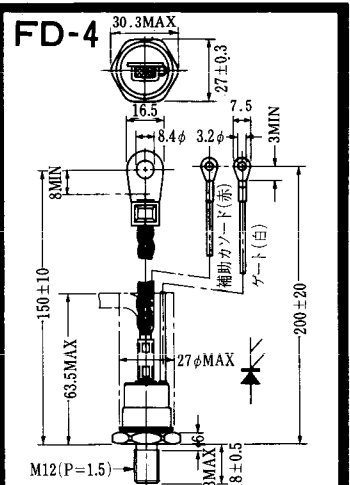


## FD-5

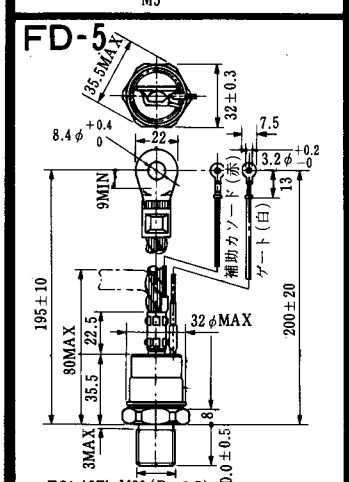


## FD-6

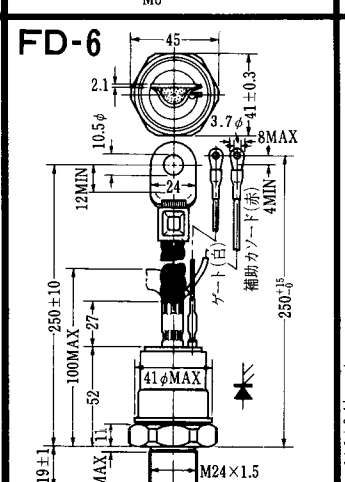


## FD-7

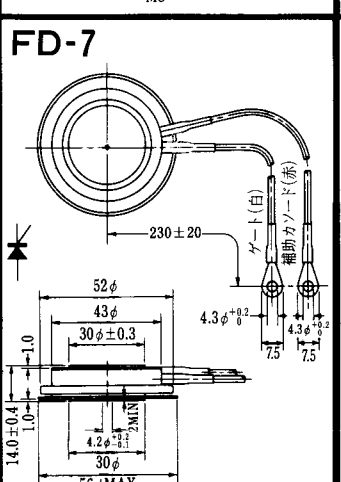


## FD-8

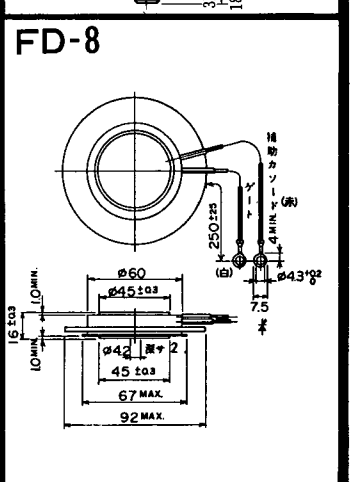


〈寸法図単位:mm〉

## FD-9

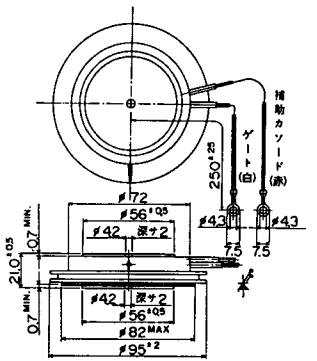


## FD-10

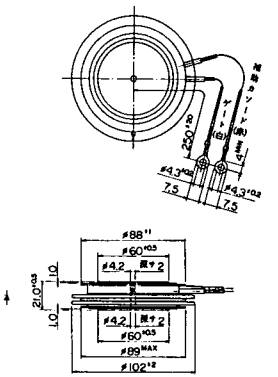


## FD-11

## FD-12

《寸法図単位:mm》

## H-1

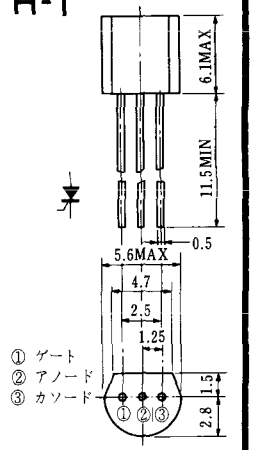


## H-2

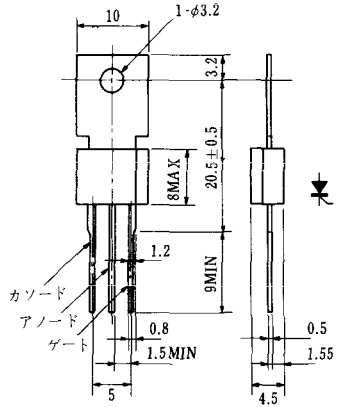


## H-3




## H-4

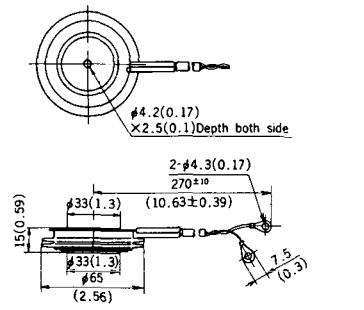


## H-5




## H-6

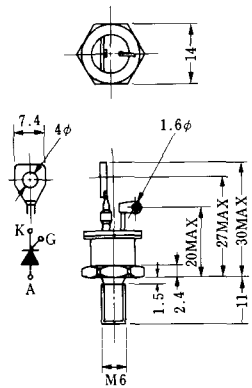


## H-7

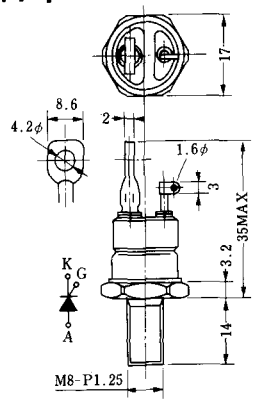


## H-8A




## H-8B

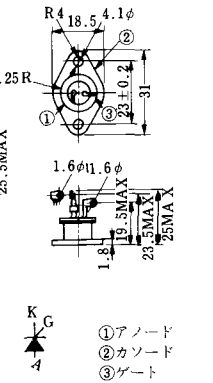


《寸法図単位：mm》

## H-9A　H-9B




①アノード
②カソード
③ゲート

## H-10

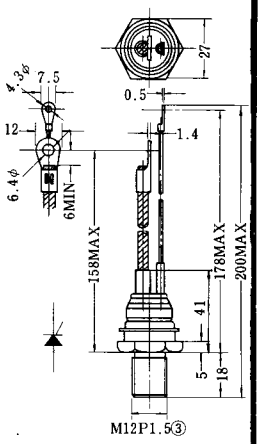


## H-11

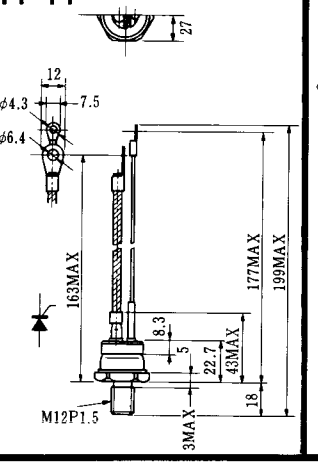


## H-12

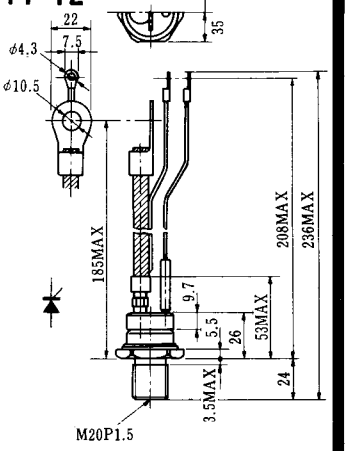


## H-13

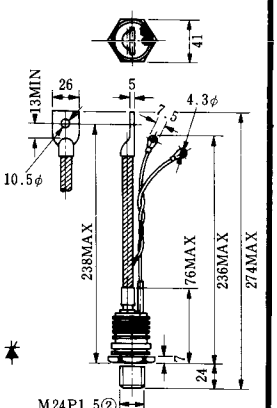


## H-14

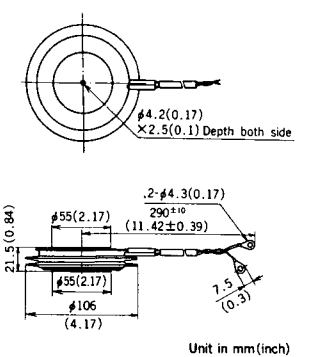


## H-15

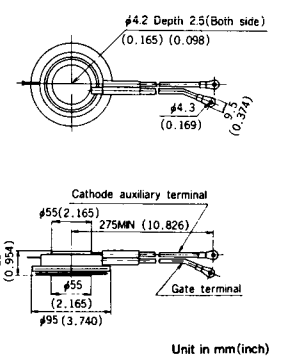


## H-16

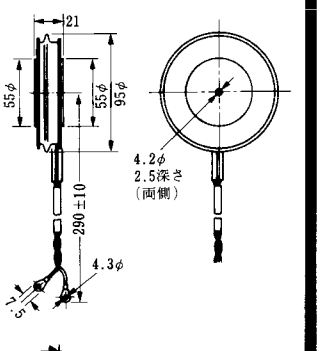


《寸法図単位：mm》

## H-17

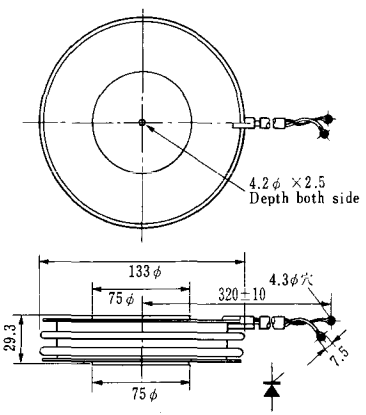


## H-18




## H-19

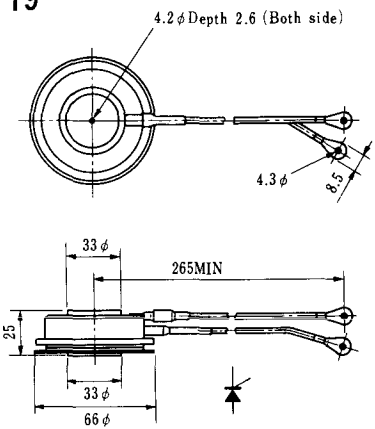


## H-20

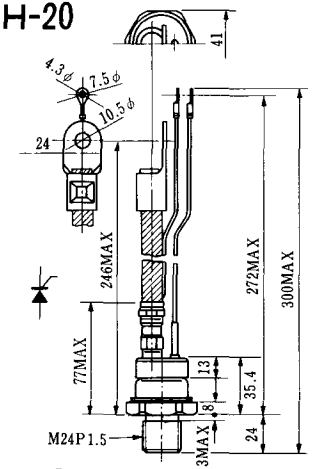


## H-21

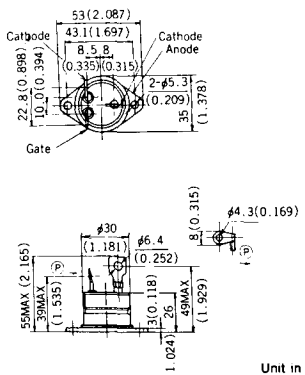


## H-22

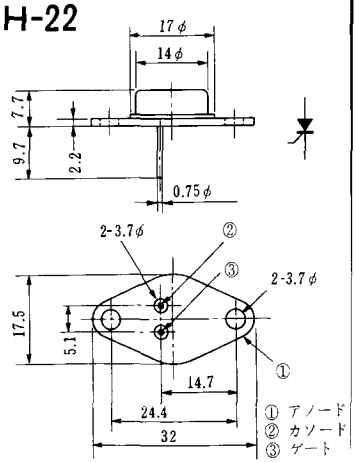


《寸法図単位：mm

## H-23

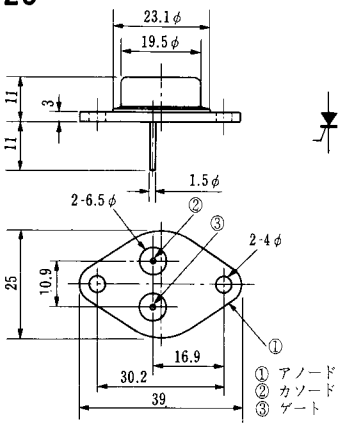


## H-24

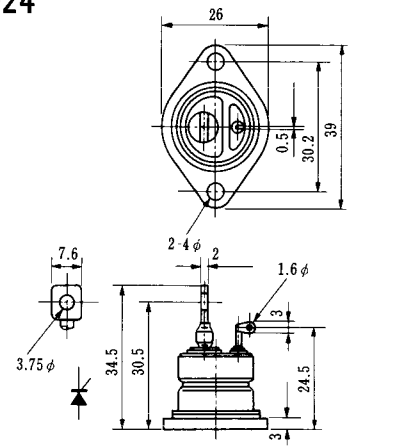


## H-25

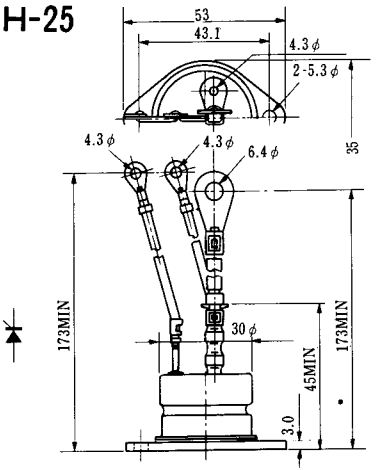


## H-26

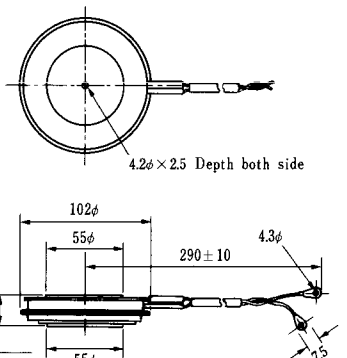


| Type | Direction of polarity |
|---|---|
| CA12 | |

## H-27

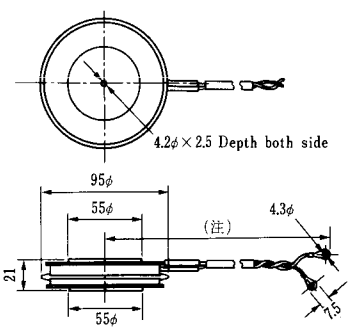


| Type | Direction of polarity |
|---|---|
| CF11V | |

(注) CC11V : 400±10
CF11V : 250±10

## H-28

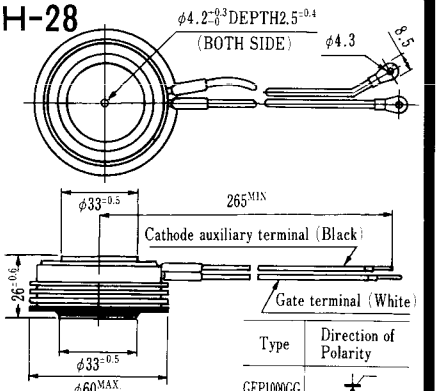


| Type | Direction of Polarity |
|---|---|
| GFP1000GG | |

Weight : 360(g)

Note : The thickness is a dimension in press at the rated mounting force.

《寸法図単位 : mm》

## H-29

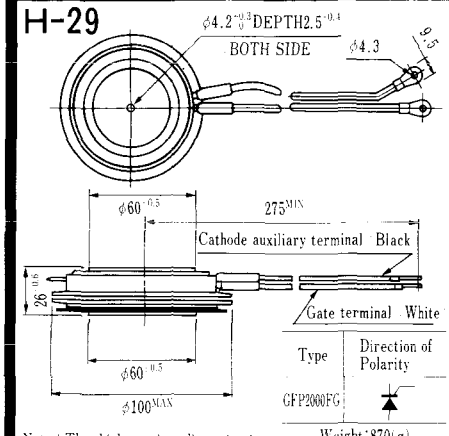


| Type | Direction of Polarity |
|---|---|
| GFP2000FG | |

Weight:870(g)

Note : The thickness is a dimension in press at the rated mounting force.

## H-30

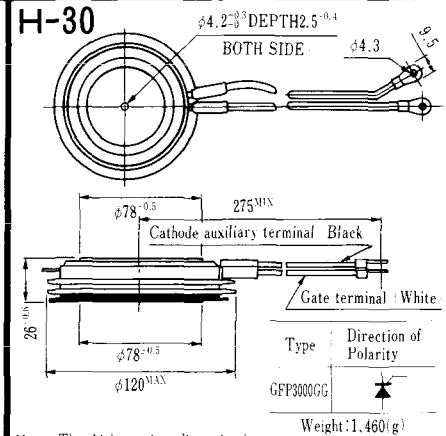


| Type | Direction of Polarity |
|---|---|
| GFP3000GG | |

Weight:1.460(g)

Note : The thickness is a dimension in press at the rated mounting force.

《寸法図単位:mm》

## HT-1




| TERMINAL | t | W | φA | φB |
|---|---|---|---|---|
| $T_1$ | 0.8±0.025 (0.031±0.001) | 6.35±0.1 (0.250±0.004) | $2.00^{+0.1}_{-0}$ $(0.079^{+0.004}_{-0})$ | 1.3 (0.051) |
| $T_2$ | 0.8±0.025 (0.031±0.001) | 6.35±0.1 (0.250±0.004) | $2.00^{+0.1}_{-0}$ $(0.079^{+0.004}_{-0})$ | 1.3 (0.051) |
| G | 0.5±0.025 (0.020±0.001) | 4.75±0.1 (0.187±0.004) | $1.55^{+0.1}_{-0}$ $(0.061^{+0.004}_{-0})$ | 1.3 (0.051) |

Unit in mm(inch)

## HT-2

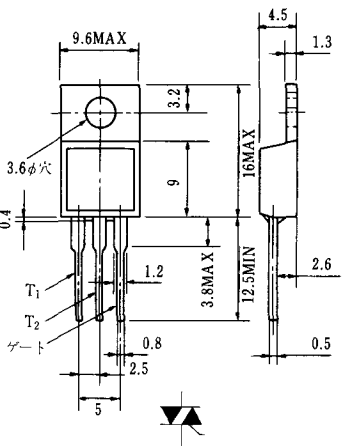


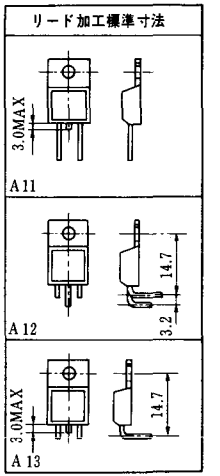


## HT-3

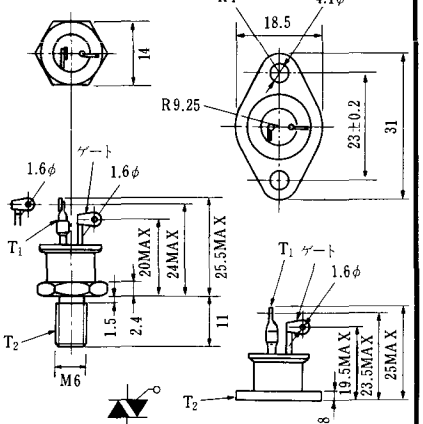


## HT-4

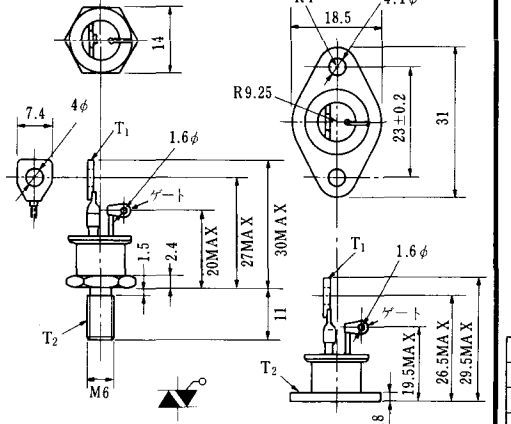


## HT-5

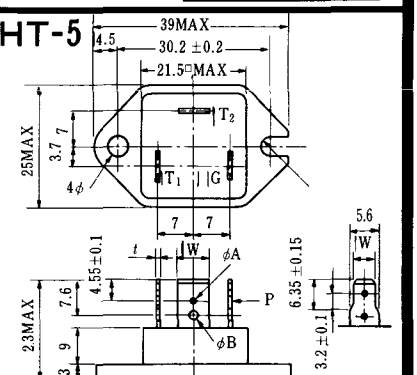


| TERMINAL | t | W | φA | φB |
|---|---|---|---|---|
| $T_1$ | 0.8±0.025 | 6.35±0.1 | $2.00^{+0.1}_{-0}$ | 2.4 |
| $T_2$ | 0.8±0.025 | 6.35±0.1 | $2.00^{+0.1}_{-0}$ | 2.4 |
| G | 0.5±0.025 | 4.75±0.1 | $1.55^{+0.1}_{-0}$ | 1.55 |

《寸法図単位：mm》

## M-1

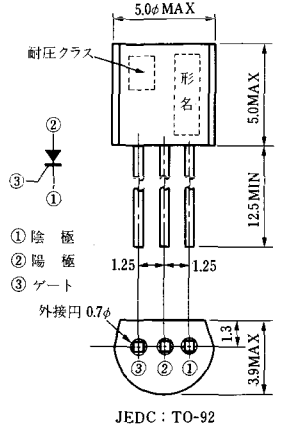


## M-2

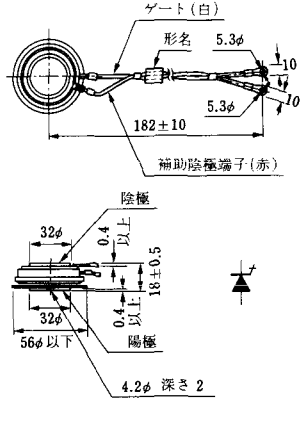


## M-3

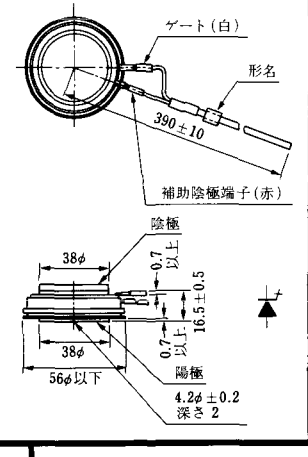


## M-4

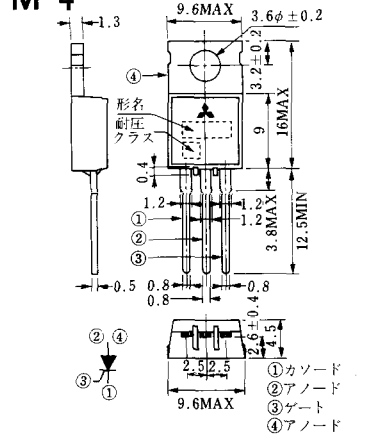


## M-5

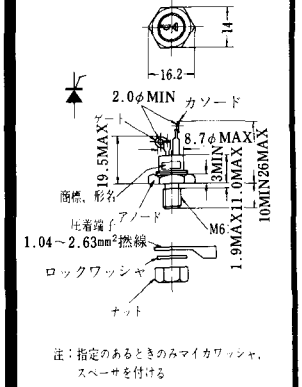


注：指定のあるときのみマイカワッシャ，スペーサを付ける

## M-6

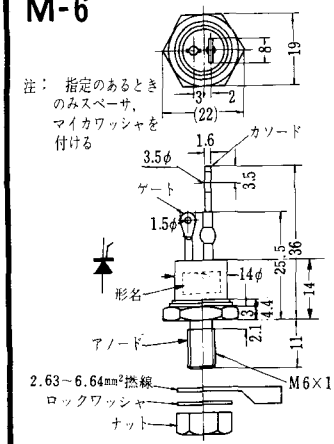


注：指定のあるときのみマイカワッシャ

## M-7

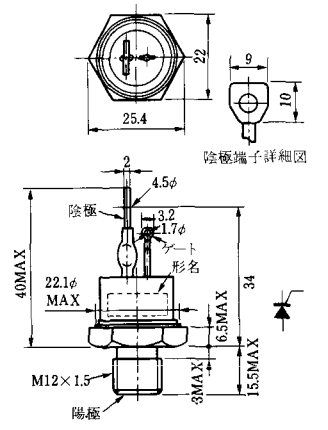


## M-8

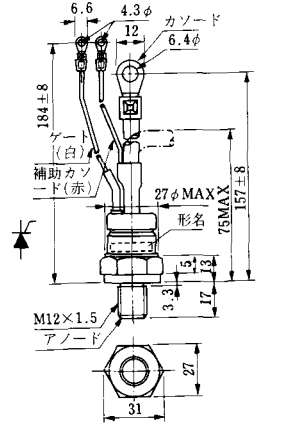


《寸法図単位：mm

## M-9

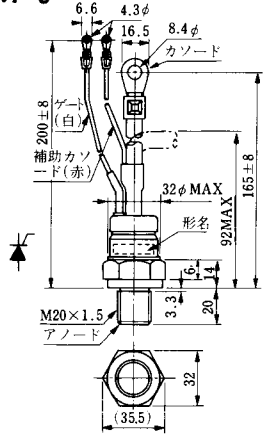


## M-10

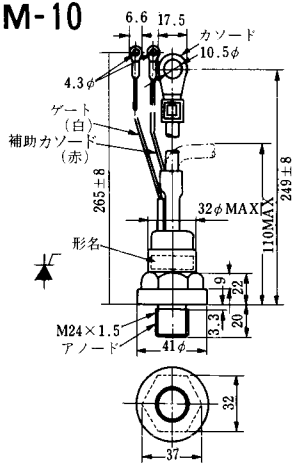


## M-11

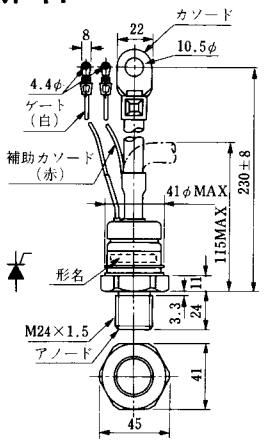


## M-12

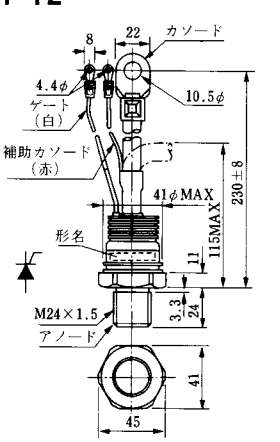


## M-13

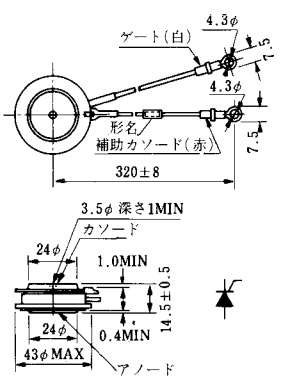


## M-14

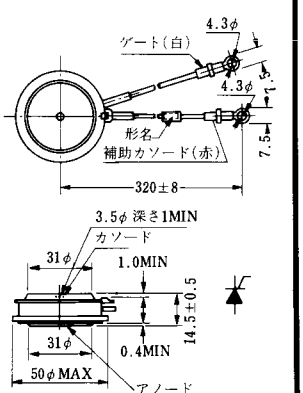


## M-15

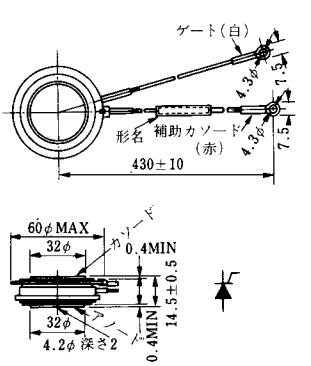


## M-16

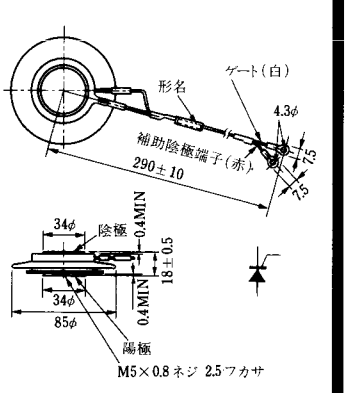


《寸法図単位：mm》

## M-17

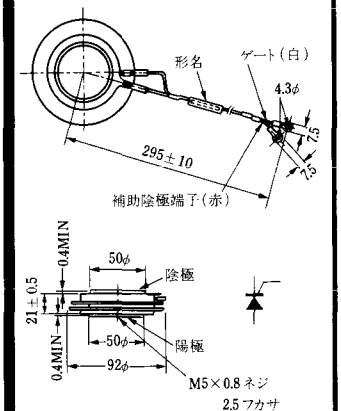


## M-18

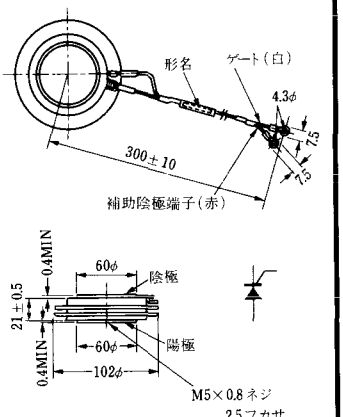


## M-19

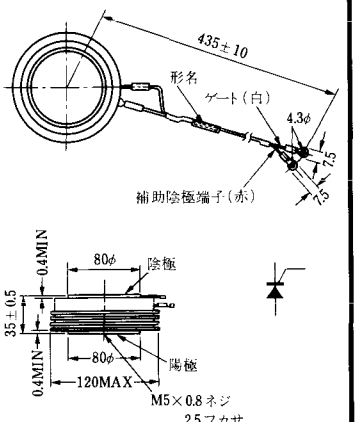


## M-20

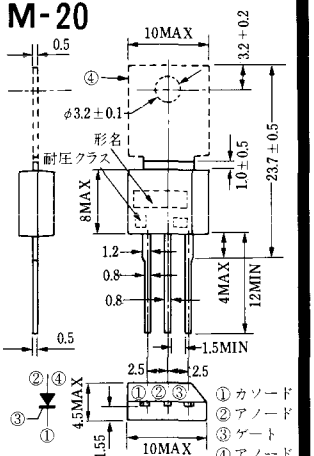


## M-21

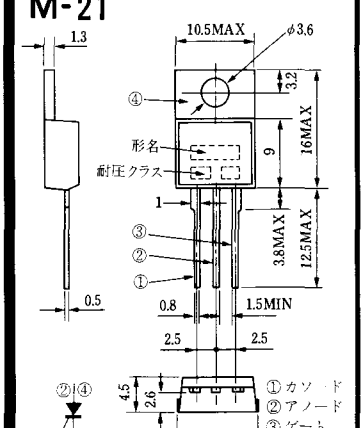


## M-22

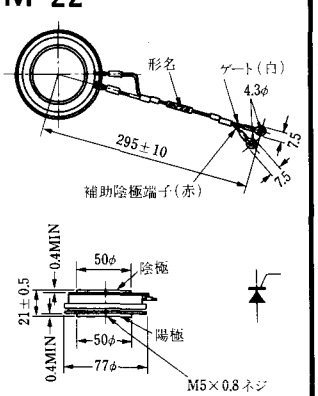


## M-23

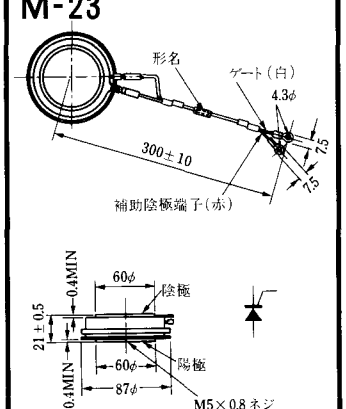


## M-24

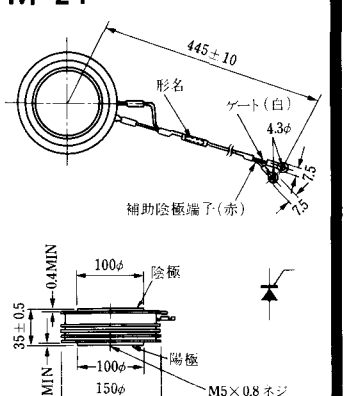


《寸法図単位：mm》

## M-25

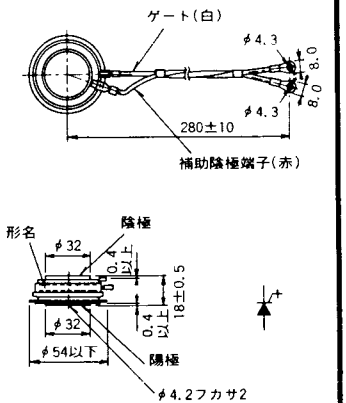


## M-26

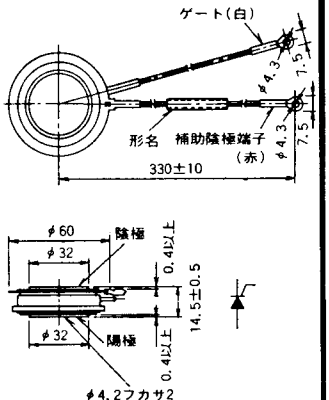


## M-27

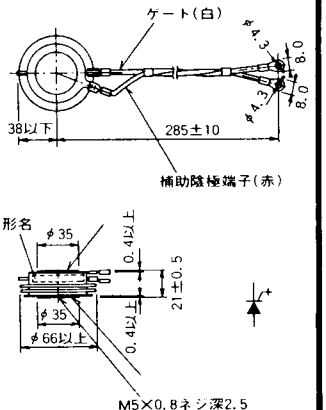


## M-28

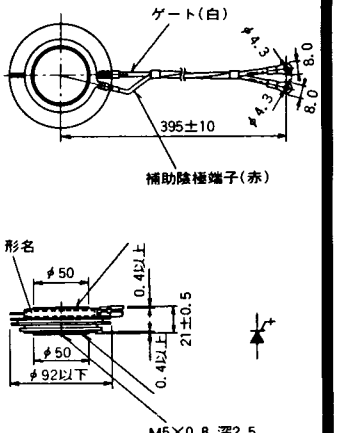


## M-29

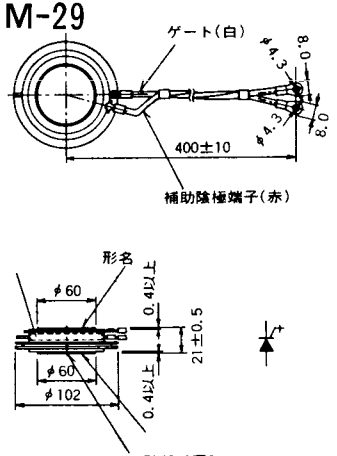


## M-30

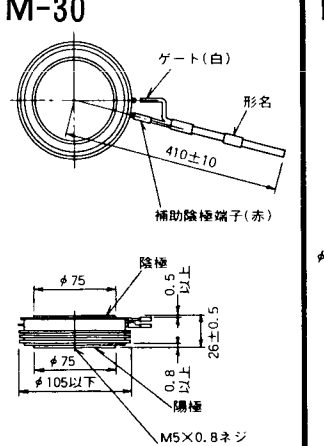


## M-31

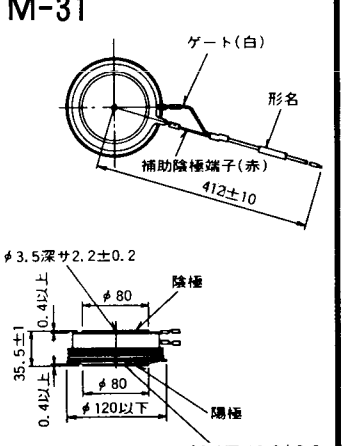


## M-32

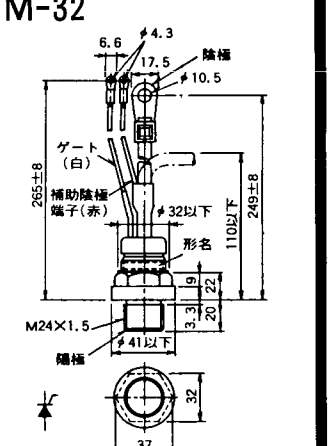


《寸法図単位：mm》

## M-33

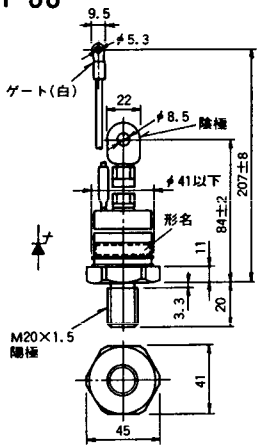


## M-34

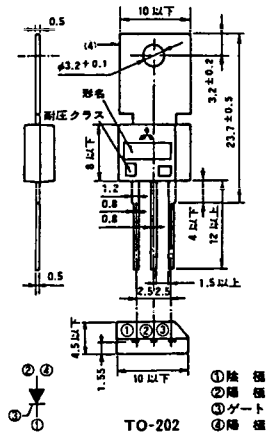


《寸法図単位:mm》

## MT-1

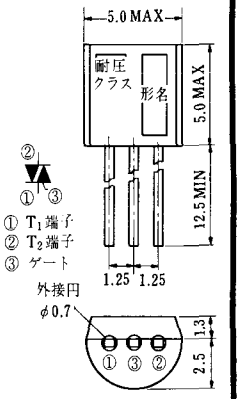


JEDC：TO-92

## MT-2

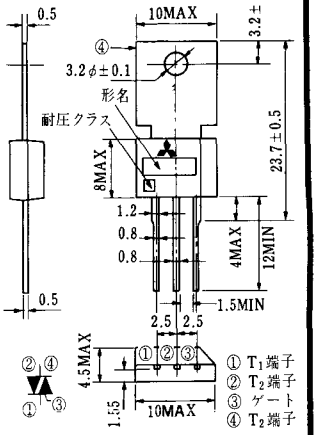


## MT-3

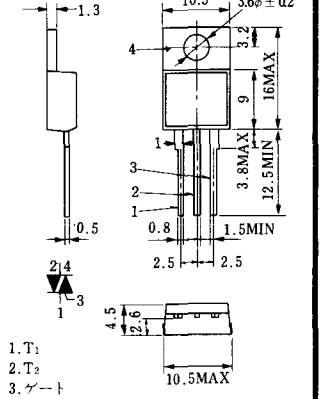


## MT-4

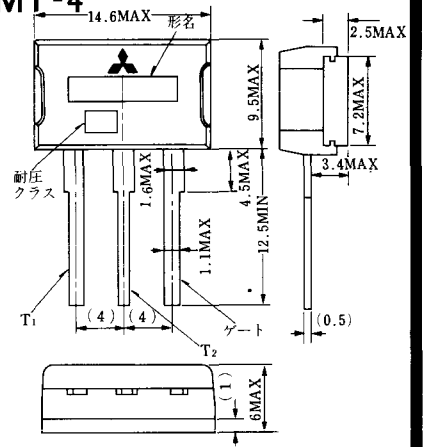


## MT-5

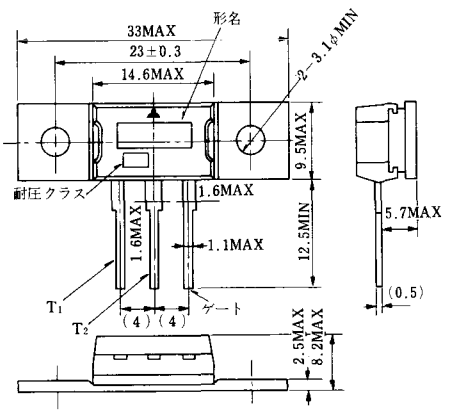


## MT-6

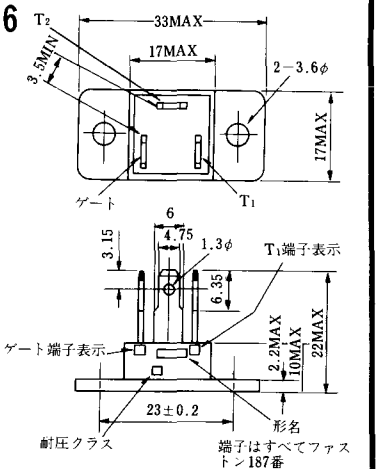


## MT-7

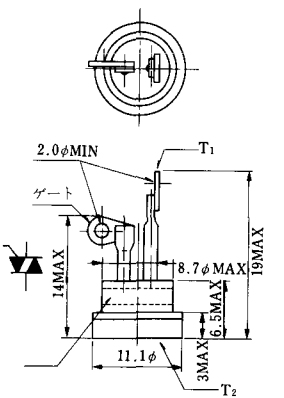


《寸法図単位：mm》

## MT-8

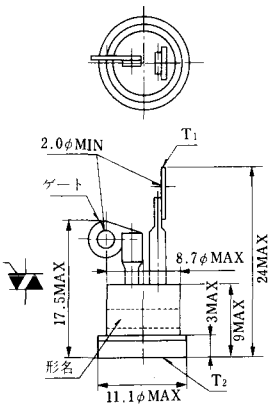


## MT-9

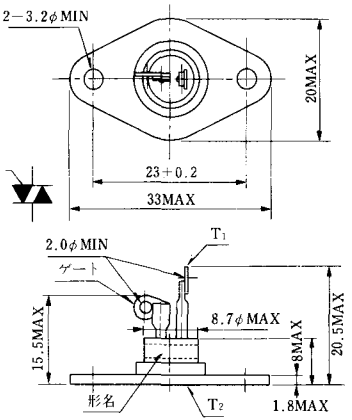


## MT-10

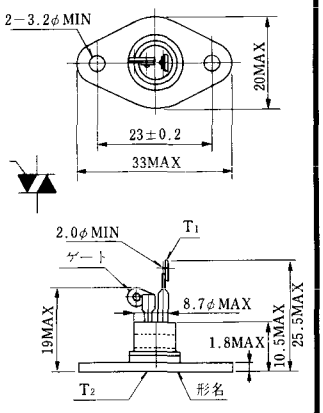


## MT-11

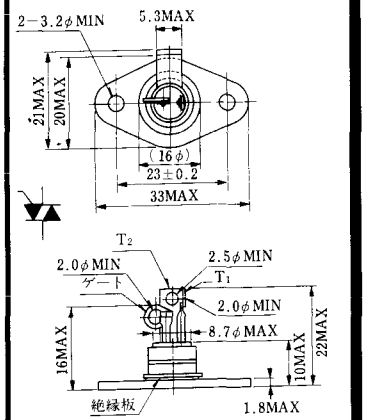


## MT-12

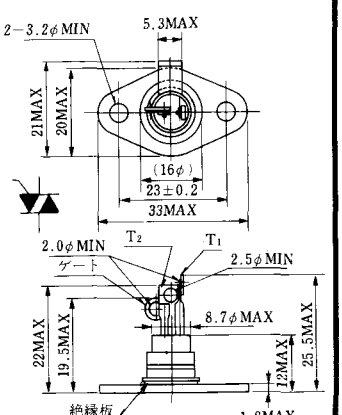


## MT-13

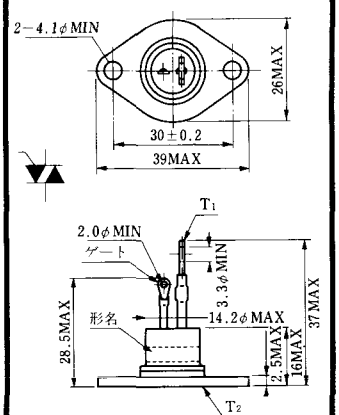


## MT-14

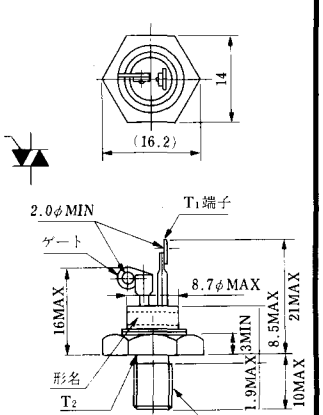


## MT-15

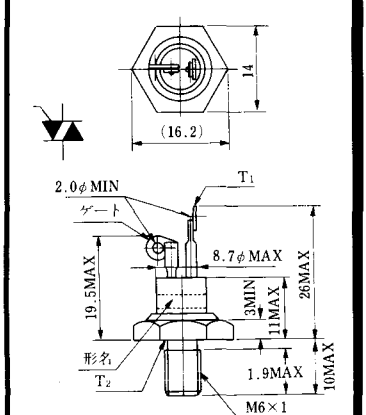


《寸法図単位：mm》

## MT-16

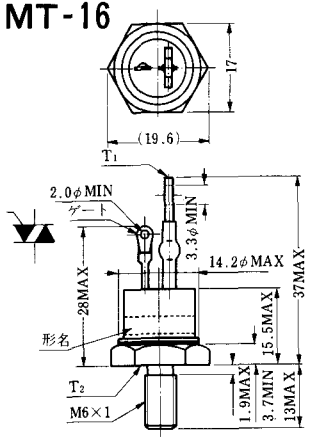


## MT-17

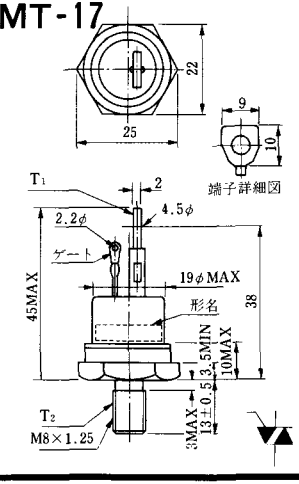


## MT-18

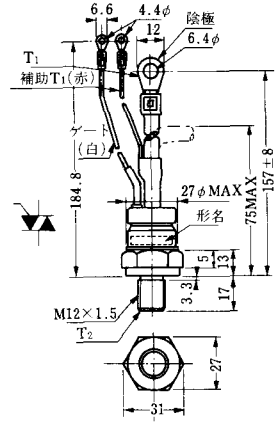


## MT-19

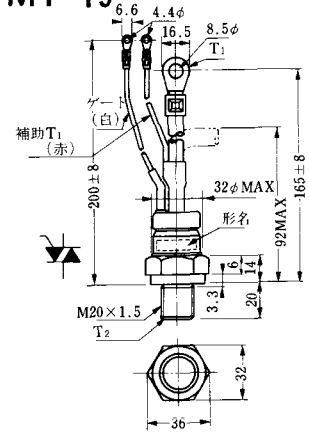


## MT-20

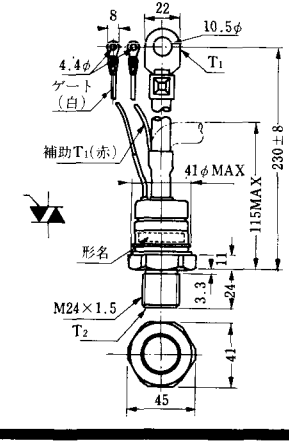


## MT-21

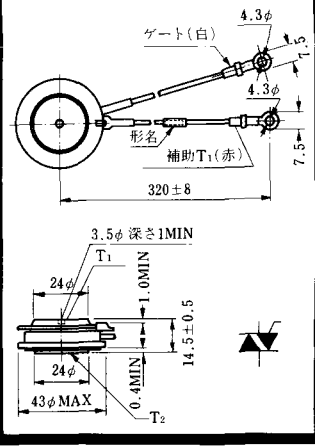


## MT-22

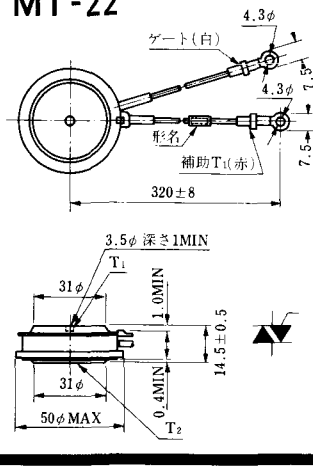


## MT-23

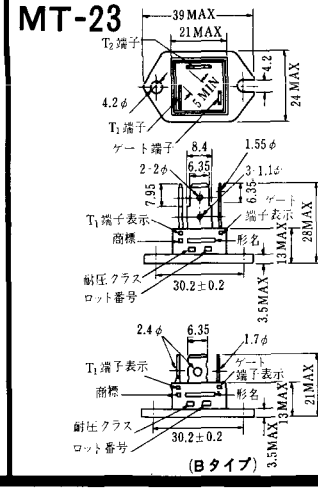


《寸法図単位：mm》

## MT-24



① $T_1$ 端子
② $T_2$ 端子
③ ゲート端子
④ $T_2$ 端子

TO－3P

《寸法図単位:mm》

## N-1

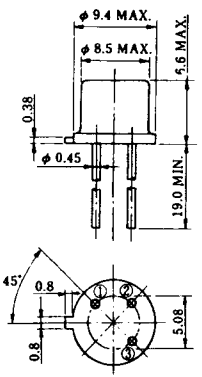


## N-2

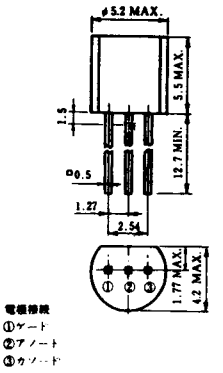


## N-3

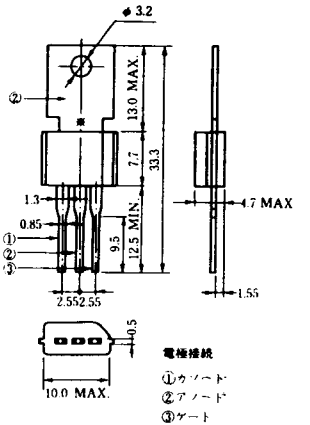


## N-4

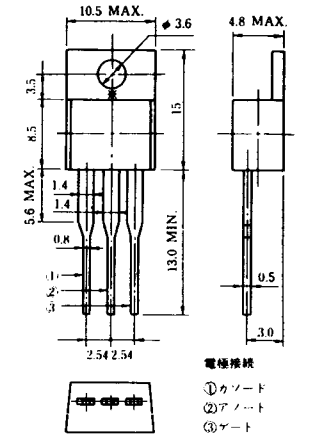


## N-5

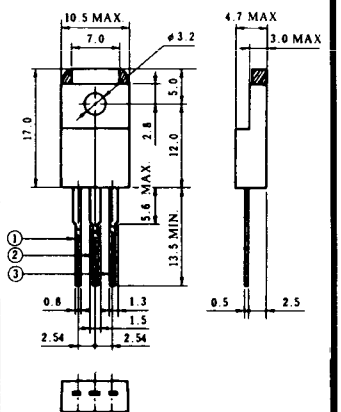


## N-6

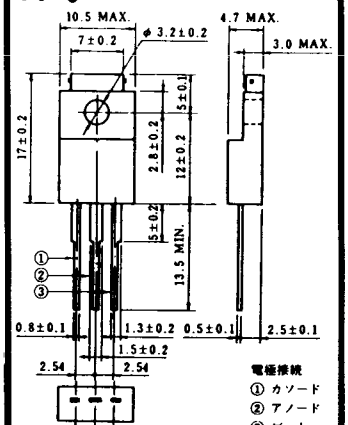


## N-7

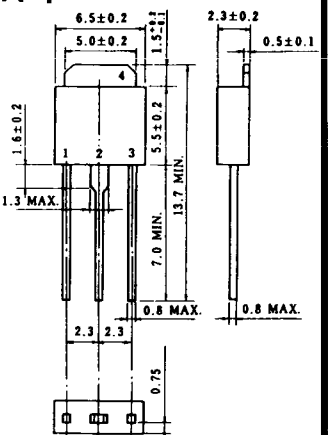


## N-8

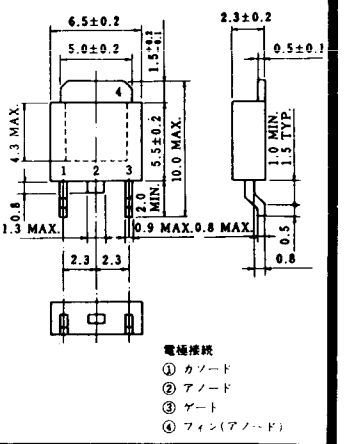


〈寸法図単位：mm〉

## N-9




電極接続
K：カソード
A：アノード
G：ゲート

〈寸法図単位：mm〉

## NA-1

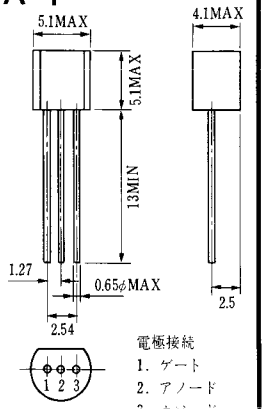


電極接続
1. ゲート
2. アノード
3. カソード

JEDEC：TO-92

## NA-2

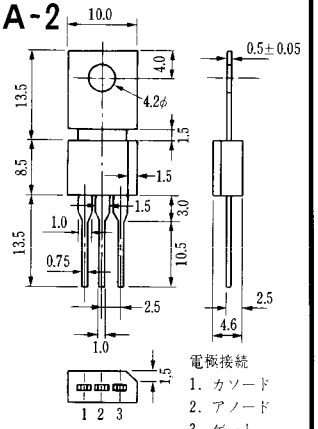


電極接続
1. カソード
2. アノード
3. ゲート

JEDEC：TO-202AA

《寸法図単位：mm》

## NI-1

11RC
21RC

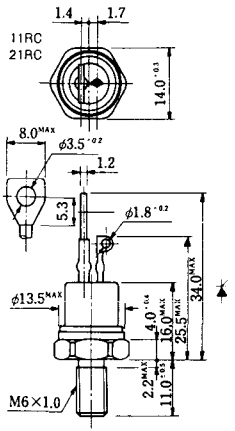

## NI-2

29RD



## NI-3

39RC
59RC
39RF
59RF

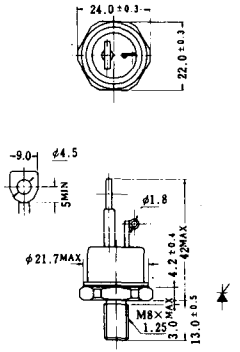

## NI-4

68RP, 88RP, 108RP, 68RS, 88RS, 78RT, 88RLD, 88RLE, 88RLF, 88RLG, 88RLH, 108RLE



## NI-5

158RP, 208RP, 128RS, 178RS, 158RT, 178RLD, 178RLE, 178RLF, 178RLG, 178RLH, 208RLE



## NI-6

308RP, 408RP, 508RP, 278RS, 358RS, 258RT, 258RLD, 258RLG, 258RLH, 308RLE, 308RLF, 358RLE



## NI-7

89RW「JL
129RW「JL

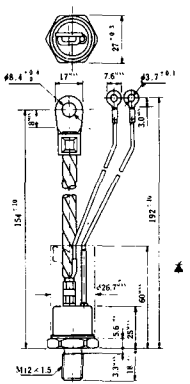

## NI-8

89RW
129RW

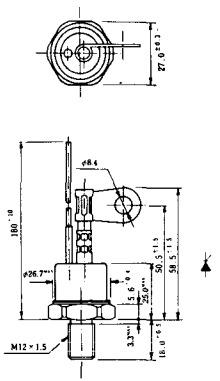

《寸法図単位:mm》

## NI-9

259RW
309RW

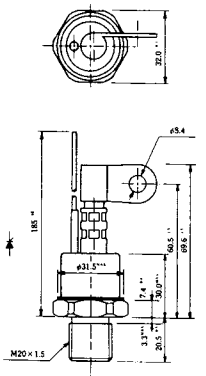

## NI-10

259RW「JL
309RW「JL

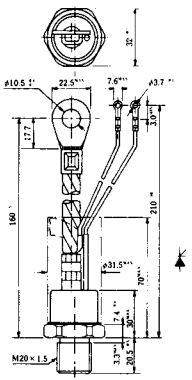

## NI-11

103PA
253PA
503PA
553PA
803PA
103PLE
103PLG
103PLH
203PLG
253PLE
253PLH
353PLG
403PLE
403PLH

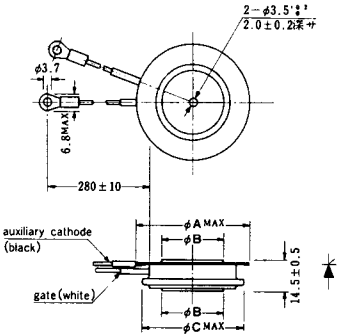


| 型名 / 寸法 | 103PA, 103PLE 103PLG, 103PLH | 253PA, 203PLG 253PLE, 253PLH | 503PA, 553PA 353PLG, 403PLE 403PLH | 803PA |
|---|---|---|---|---|
| A | 40 | 46 | 55.5 | 55.5 |
| B | 16 | 22 | 30 | 32 |
| C | 36 | 42 | 50.5 | 50.5 |

## NI-12

403PAB
503PAB
503PLB




## NI-13

1003PA
1003PAB
1003PLF
1003PLH
1503PA




## NI-14

358RGA




## NI-15

359RGA




《寸法図単位:mm》

## NI-16

503PLF
503PLH




## NI-17

3003PA




## NI-18

353PGA「」E




## NI-19

603PGA, 603PGA「」A, 803PGA




## NI-20

603PGA「」E




## NI-21

1001PGB「」E




## NI-22

1201PGA, 1201PGA「」A, 1401PGA




## NI-23

1201PGA「」E




《寸法図単位:mm》

## NI-24

2001PGBT JE




## NI-25

## NI-26

《寸法図単位:mm》

## NT-1




電極接続
①$T_1$
②ゲート
③$T_2$

## NT-2




電極接続
①$T_1$
②ゲート
③$T_2$

## NT-3

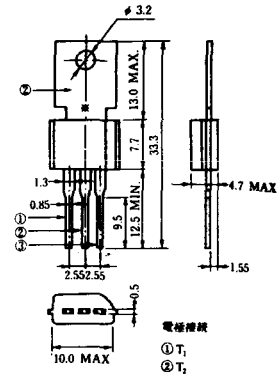


電極接続
①$T_1$
②$T_2$
③ゲート

## NT-4

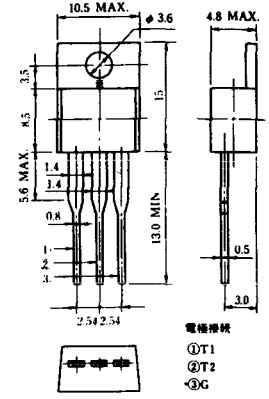


電極接続
①T1
②T2
③G

## NT-5

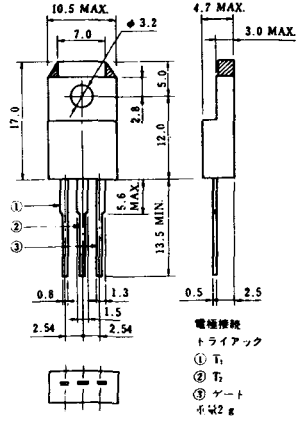


電極接続
トライアック
① $T_1$
② $T_2$
③ ゲート
本体2 g

## NT-6

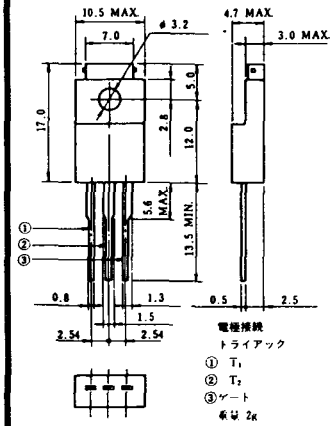


電極接続
トライアック
① $T_1$
② $T_2$
③ゲート
本体 2g

## NT-7

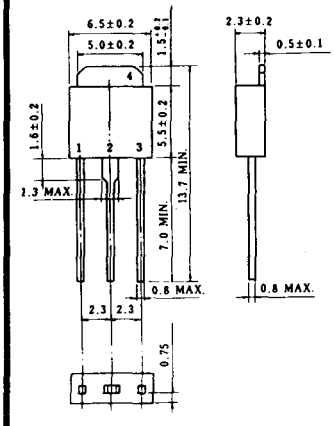


## NT-8

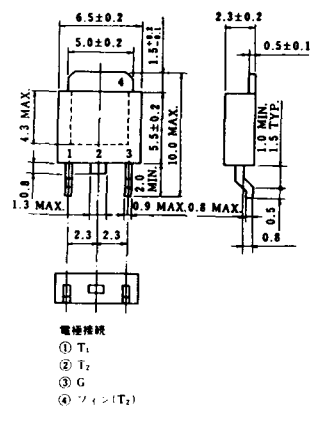


電極接続
① $T_1$
② $T_2$
③ G
④ フィン($T_2$)

《寸法図単位：mm》

## S-1

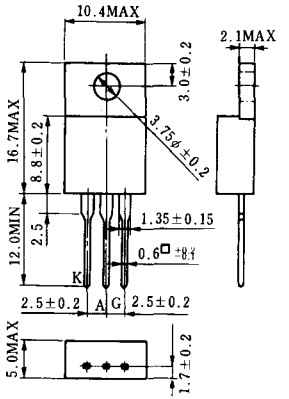


## ST-1

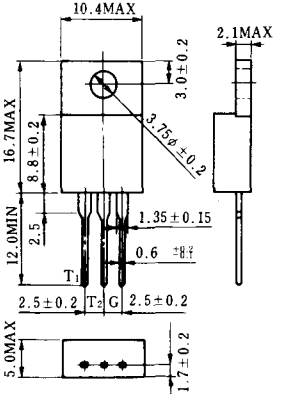


《寸法図単位：mm》

## SA-1

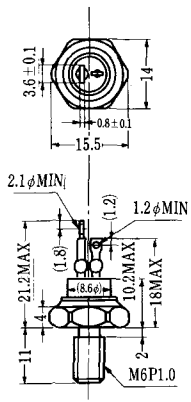


## SA-2

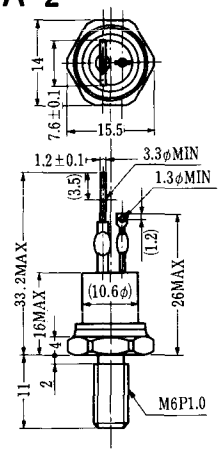


## SA-3

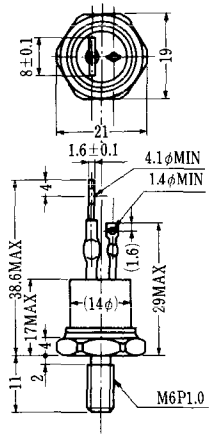


## SA-4

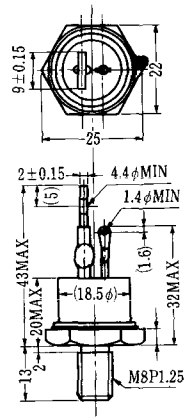


## SA-5

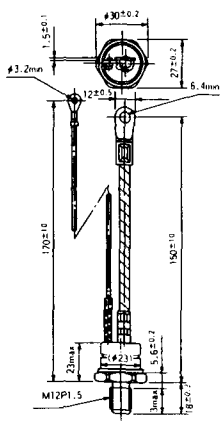


## SA-6

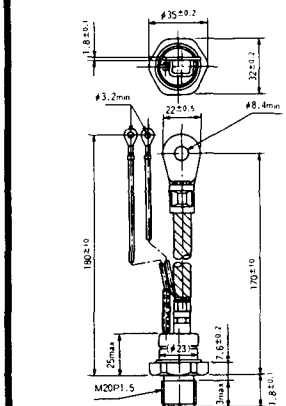


## SA-7

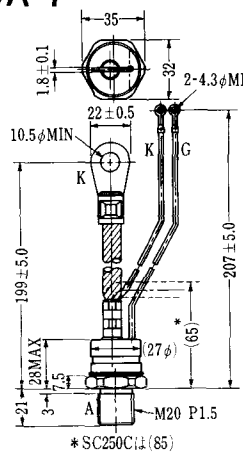


## SA-8

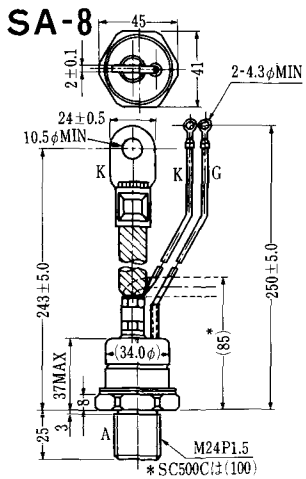


《寸法図単位:mm》

## SA-9

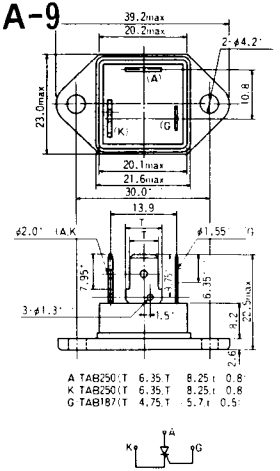


## SA-10

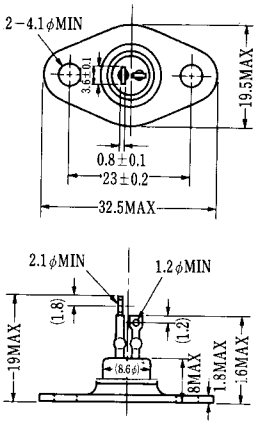


## SA-11

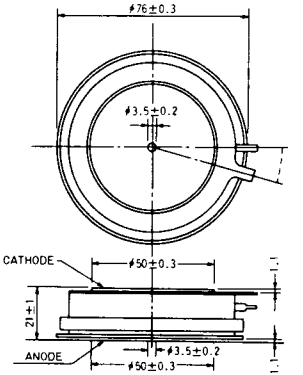


## SA-12

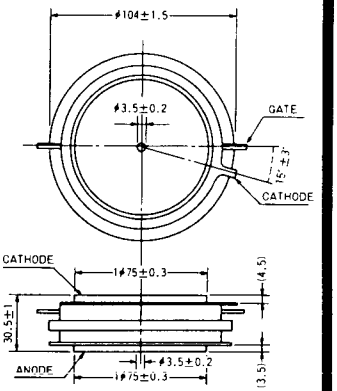


《寸法図単位:mm》

## SAT-1

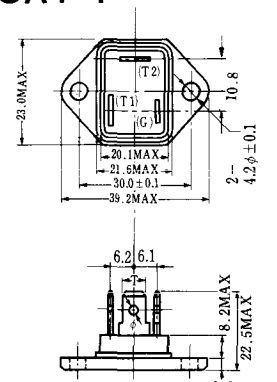


T1端子：ファストン250(T=6.35, t=0.8, φ=1.65)
T2端子：ファストン250(T=6.35, t=0.8, φ=1.65)
G 端子：ファストン187(T=4.75, t=0.5, φ=1.3)

## SAT-2

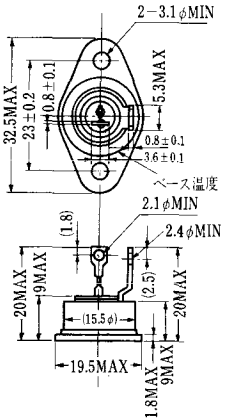


## SAT-3

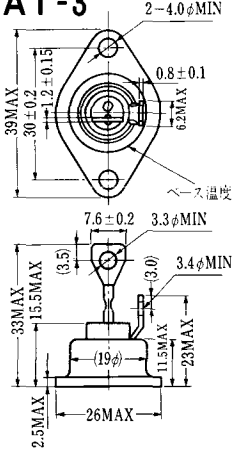


## SAT-4

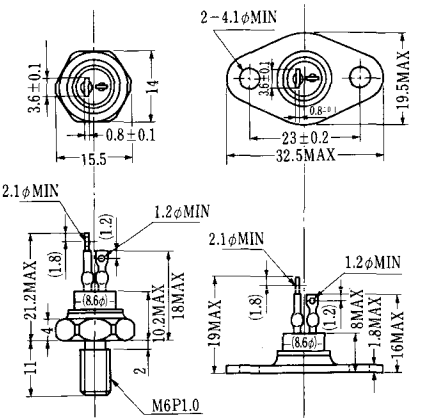


## SAT-5

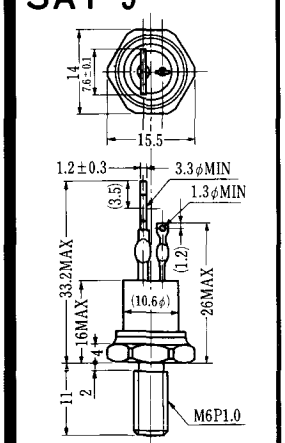


## SAT-6

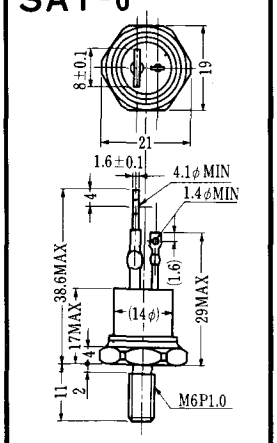


## SAT-7

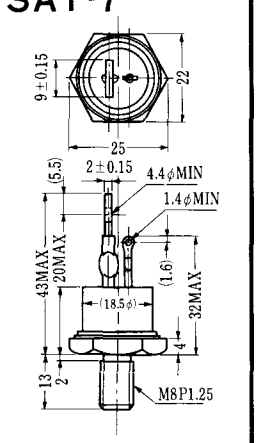


## SAT-8

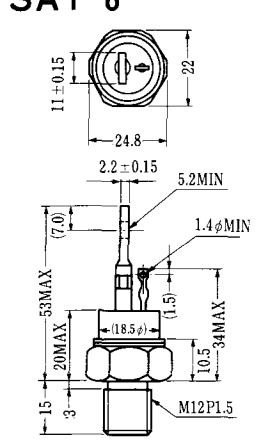


## SAT-9

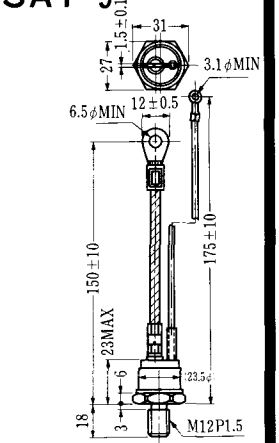


《寸法図単位：mm》

## SAT-10

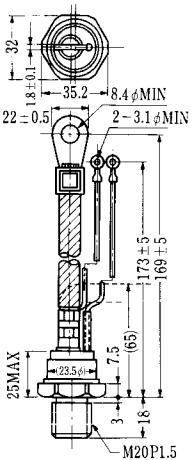


## SAT-11

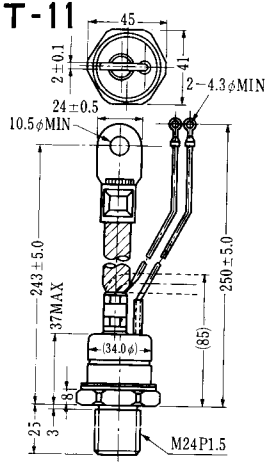


《寸法図単位：mm》

## SY-1(1096A)




C: Cathode
A: Anode
G: Gate

## SY-2(1151)

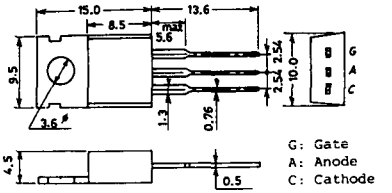


G: Gate
A: Anode
C: Cathode

## SY-3(1104)

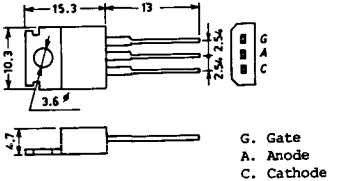


G. Gate
A. Anode
C. Cathode

## SY-4(1150)




G: Gate
A: Anode
C: Cathode

《寸法図単位:mm》

## 1097A




G: Gate

## 1102




## 1141

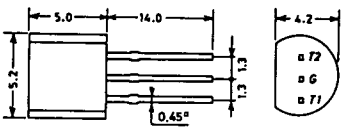


## 1142




## 1144

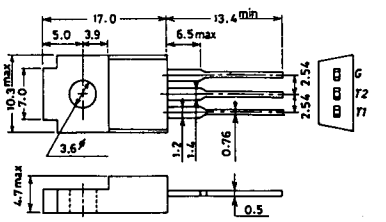


## 1155

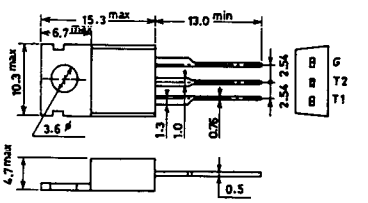


## 1192A




G: Gate

《寸法図単位:mm》

## T-1 (13-5A1A)

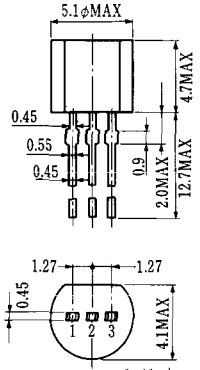


1 ゲート
2 アノード
3 カソード

## T-2 (13-8A1A)

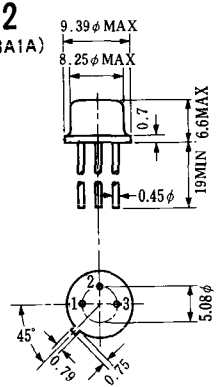


1. カソード
2. ゲート
3. アノード(ケース)

## T-3 (13-8C1A)

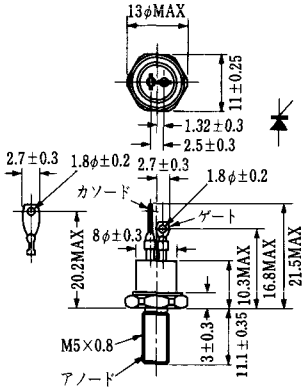


## T-4 (13-10A1A)

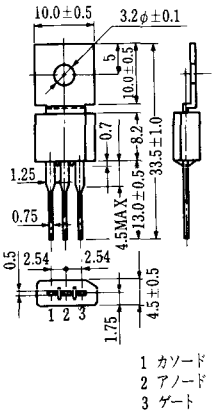


1 カソード
2 アノード
3 ゲート

## T-5 (13-10B1A)

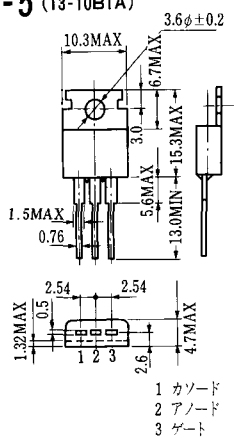


1 カソード
2 アノード
3 ゲート

## T-6 (13-11D1A)

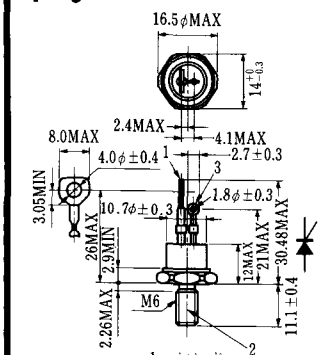


1 カソード
2 アノード
3 ゲート

## T-7 (13-13A1A)

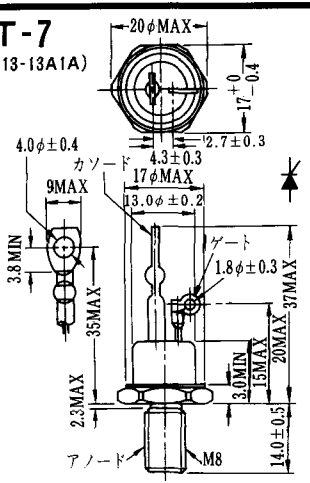


## T-8 (13-13B1A)

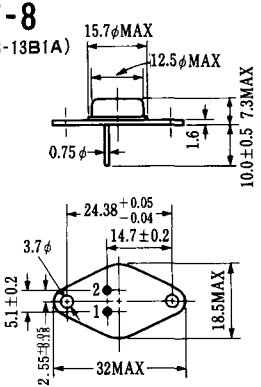


1. ゲート
2. カソード
アノード(ケース)

《寸法図単位：mm

## T-9 (13-14A1A)

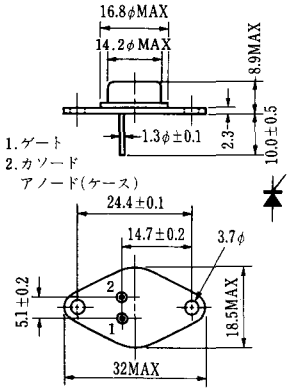


## T-10 (13-19A1A)

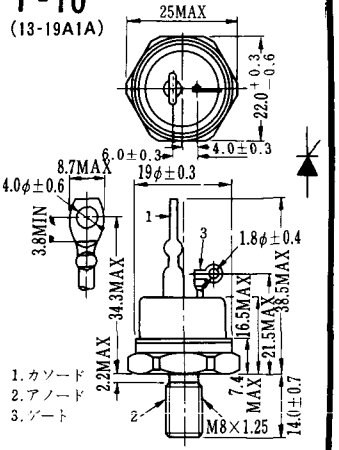


## T-11 (13-21B1A)

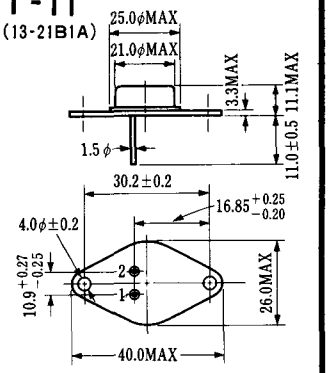


## T-12 (13-27B1B)

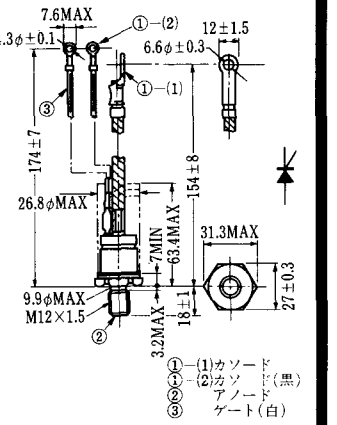


## T-13 (13-27C1A)

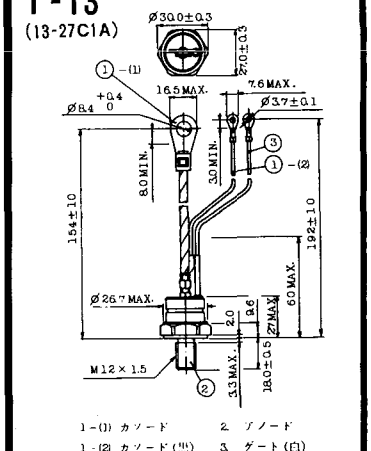


## T-14 (13-32A1A)

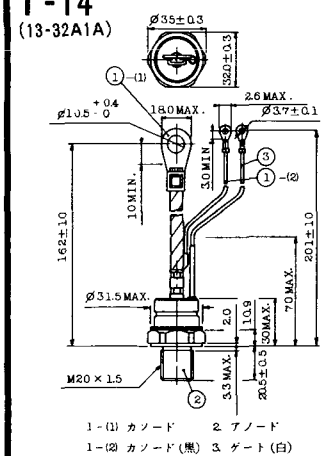


## T-15 (13-35C1B)

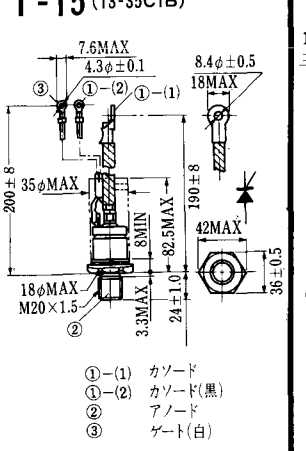


## T-16 (13-40B1A)

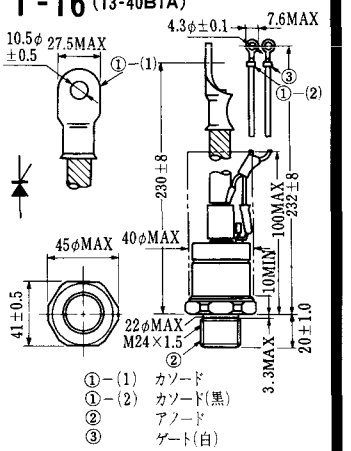


《寸法図単位：mm》

## T-17 (13-42A1A)

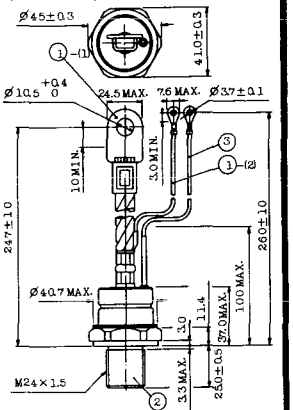


1-(1) カソード　2. アノード
1-(2) カソード(黒)　3. ゲート(白)

## T-18 (13-45D1A)




①-(1) カソード
①-(2) カソード(黒)
②　アノード
③　ゲート(白)

## T-19 (13-52B1A)

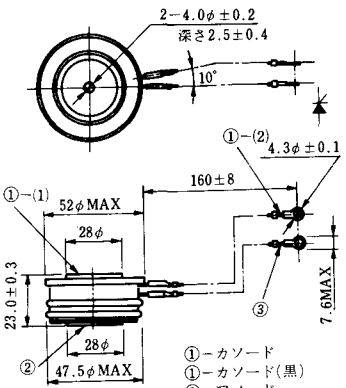


①-カソード
①-カソード(黒)
②　アノード
③　ゲート(白)

## T-20 (13-52C1A)




①-(1) カソード
①-(2) カソード(黒)
②　アノード
③　ゲート(白)

## T-21 (13-60A1A)




1-(1) カソード
1-(2) カソード(黒)
2　アノード
3　ゲート(白)

## T-22 (13-70C1A)




① カソード(1)
② カソード(2)(黒)
③ アノード
④ ゲート(白)

## T-23 (13-78A1A)

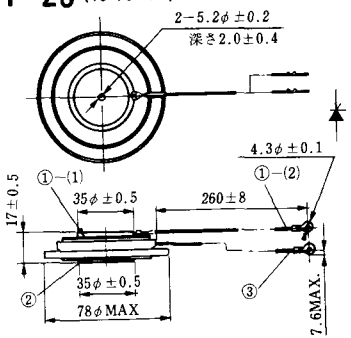


①-(1) カソード
①-(2) カソード(黒)
②　アノード
③　ゲート(白)

## T-24 (13-100C1A)

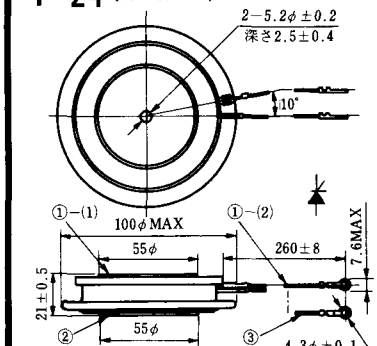


①-(1) カソード
①-(2) カソード(黒)
②　アノード
③　ゲート(白)

《寸法図単位：mm

## T-25 (13-120A2A)

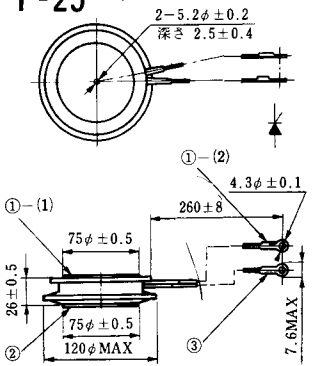


①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-26 (13-150A1A)

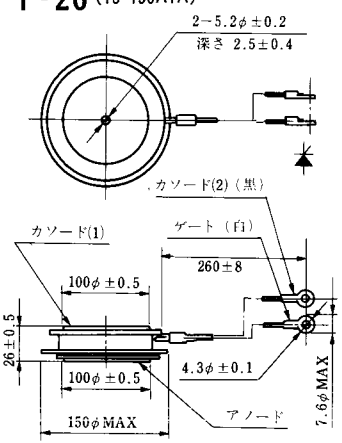


①−(1) カソード
①−(2) カソード(赤)
② アノード
③ ゲート(白)

## T-27 (13-37A1A)

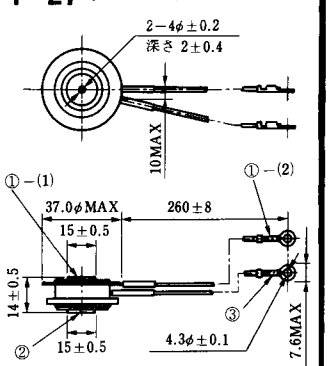


①−(1) カソード
①−(2) カソード(赤)
② アノード
③ ゲート(白)

## T-28 (13-45E1A)

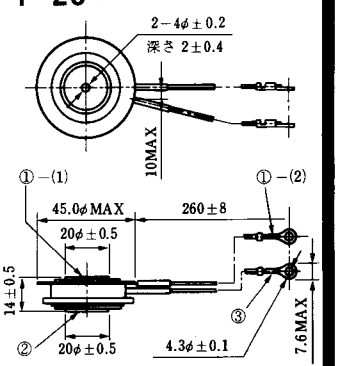


①−(1) カソード
①−(2) カソード(赤)
② アノード
③ ゲート(白)

## T-29 (13-51A1A)

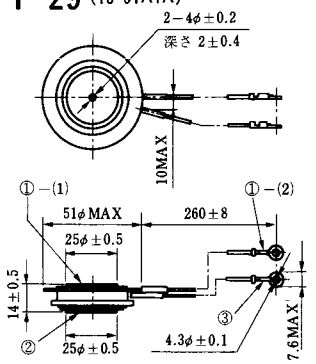


①−(1) カソード
①−(2) カソード(赤)
② アノード
③ ゲート(白)

## T-30 (13-57A1A)

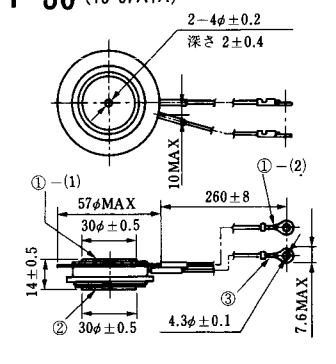


①−(1) カソード
①−(2) カソード(赤)
② アノード
③ ゲート(白)

## T-31 (13-100E1A)

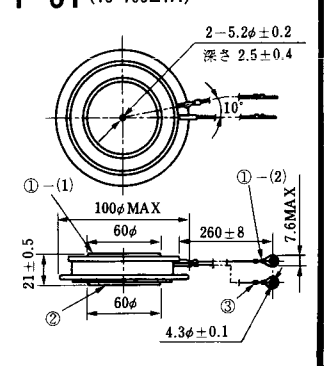


①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-32 (13-60E3A)

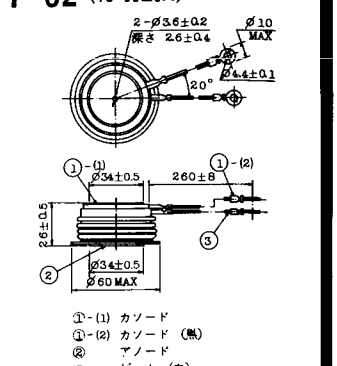


①-(1) カソード
①-(2) カソード (黒)
② アノード
③ ゲート (白)

《寸法図単位：mm》

## T-33 (13-78B1A)




① カノード
② アノード
③ ゲート

## T-34 (13-66A1A)

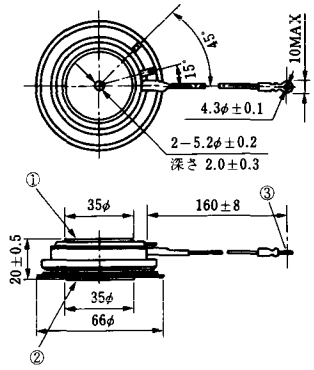


① カソード
② アノード
③ ゲート

## T-35 (13-100D1A)

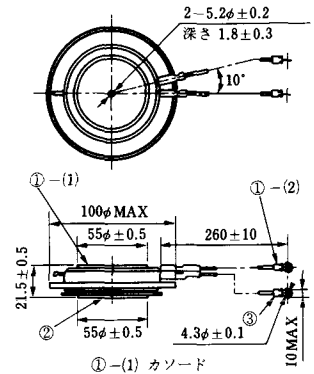


①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-36 (13-120E1A)

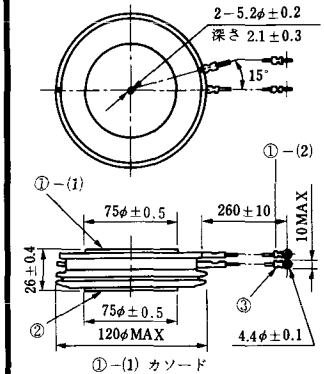


①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-37 (13-120A1A)




①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-38 (13-120C1A)




① カソード
② アノード
③ ゲート

## T-39 (13-80B1A)




①−(1) カソード
①−(2) カソード(黒)
② アノード
③ ゲート(白)

## T-40 (13-28A1A)

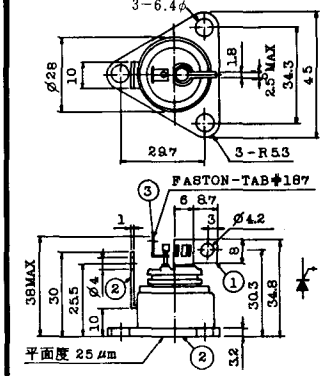


1. カソード
2. アノード
3. ゲート

《寸法図単位：mm

## T-41 (13-28A2A)

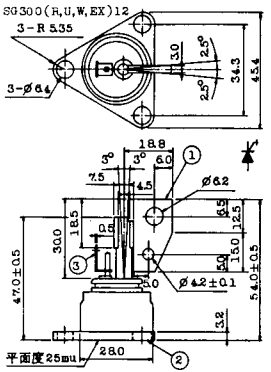


1. カソード
2. アノード
3. ゲート

## T-42 (13-45F1A)




①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

## T-43 (13-60E2A)




①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

## T-44 (13-36A1A)

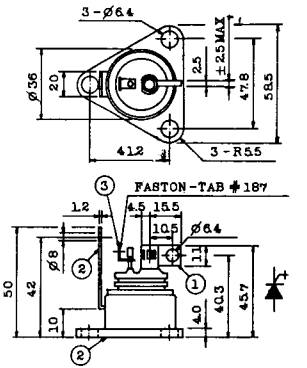


1. カソード
2. アノード
3. ゲート

## T-45 (13-51B1A)




①-(1) カソード
①-(2) カソード (黒)
② アノード
③ ゲート (白)

## T-46 (13-36B1A)

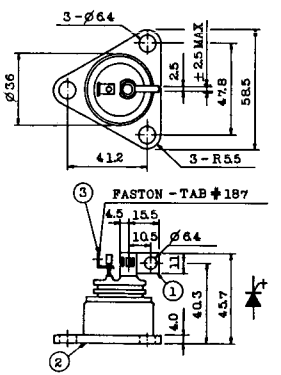


1. カソード
2. アノード
3. ゲート

## T-47 (13-60E1A)




①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

## T-48 (13-93C1A)




①-(1) カソード
①-(2) カソード(黒色)
② アノード
③ ゲート(白色)

《寸法図単位：mm》

## T-49 (13-75A1A)

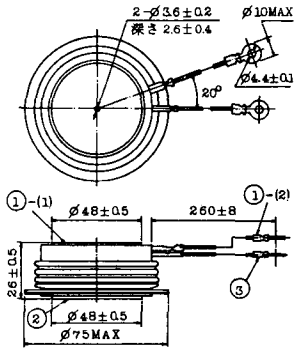


1-(1) カソード
1-(2) カソード（黒）
2. アノード
3. ゲート（白）

## T-50 (13-10A3A)




1. カソード
2. アノード
3. ゲート

## T-51 (13-10D1A)




1. カソード
2. アノード
3. ゲート

## T-52 (13-10D2A)




1. カソード
2. アノード
3. ゲート

## T-53 (13-10E1B)

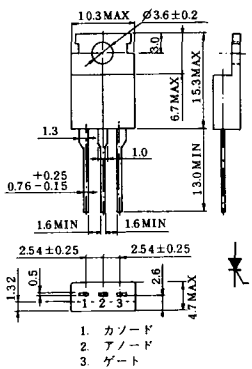


1. カソード
2. アノード
3. ゲート

## T-54 (13-10F1B)

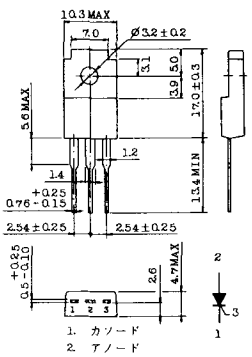


1. カソード
2. アノード
3. ゲート

## T-55 (13-5A1D)

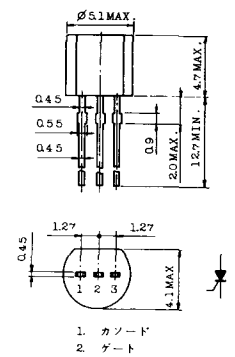


1. カソード
2. ゲート
3. アノード

## T-56 (13-13C1A)

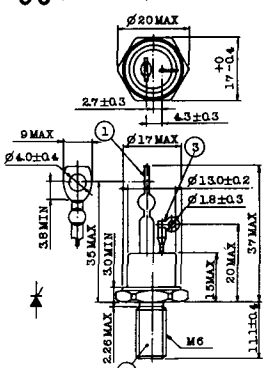


1. カソード
2. アノード
3. ゲート

《寸法図単位：mm》

## T-57 (12-16C1A)




1. アノード（主）
2. ゲート（主）
3. カソード（共通）
4. ゲート（補助）
5. アノード（補助）

## T-58 (13-10H1B)

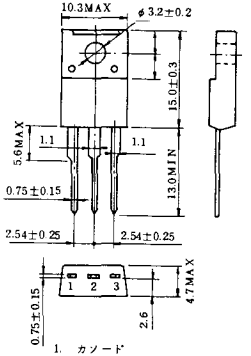


1. カソード
2. アノード
3. ゲート

## T-59 (13-120A1A)




1-(1) カソード
1-(2) カソード(黒)
2. アノード
3. ゲート(白)

## T-60




1. カソード
2. アノード
3. ゲート

## T-61 (13-5B1A)




1. ゲート
2. アノード
3. カソード

## T-62 (13-10H1A)




1. カソード
2. アノード
3. ゲート

## T-63 (13-16A1B)




1. カソード
2. アノード
3. ゲート

《寸法図単位:mm》

## TT-1




1. ゲート
2. $T_2$
3. $T_1$

## TT-2




1. $T_1$
2. ゲート
3. $T_2$

## TT-3

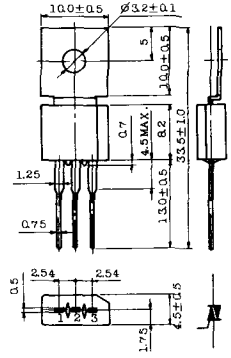


1. $T_1$
2. $T_2$
3. ゲート

## TT-4

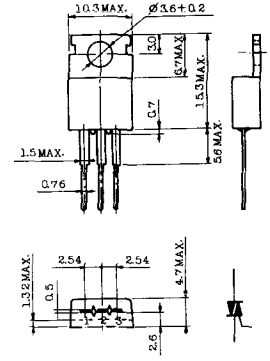


1. $T_1$
2. $T_2$
3. ゲート

## TT-5




1. T1
2. T2
3. ゲート

## TT-6




1. T1
2. T2（放熱板）
3. ゲート

## TT-7

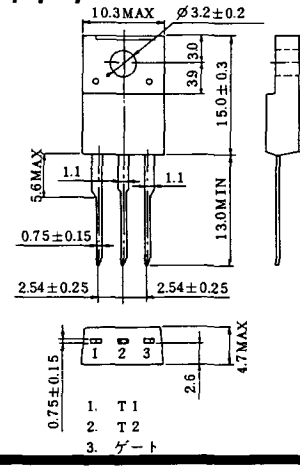


1. T1
2. T2
3. ゲート

## TT-8




1. ゲート
2. $T_1$
   $T_2$（ケース）

〈寸法図単位：mm

## TT-9




1. ゲート
2. $T_1$
3. $T_2$（ケース）

## TT-10

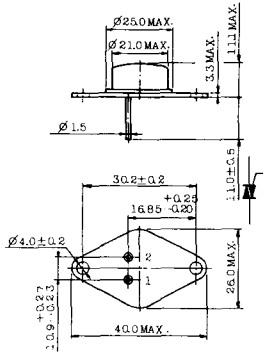


1. ゲート
2. $T_1$
3. $T_2$（ケース）

## TT-11




1. ゲート（ファストン端子 #187）
2. $T_1$（〃 #250）
3. $T_2$（〃 #250）

## TT-12

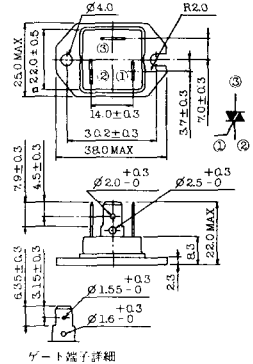


① ゲート（ファストン端子 #187）
② $T_1$（〃 #250）
③ $T_2$（〃 #250）

## TT-13

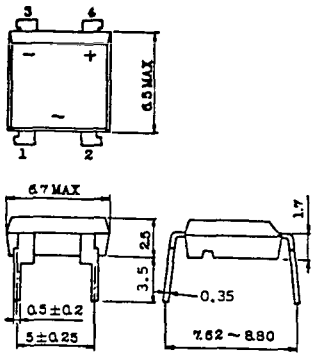


1,2:T2
3:GATE
4:T1

## TT-14

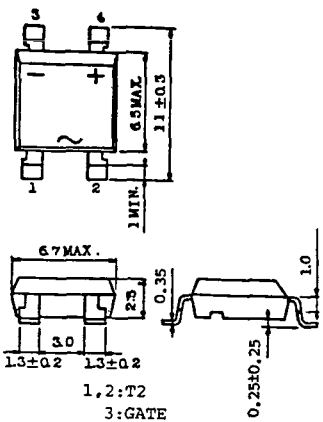


1,2:T2
3:GATE
4:T1

## TT-15 (13-14A1B)

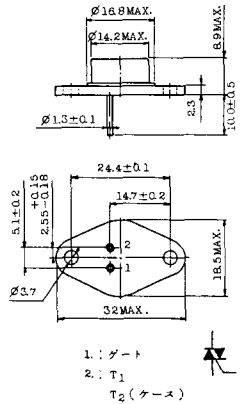


1.：ゲート
2.：$T_1$
$T_2$（ケース）

## TT-16 (13-16A1A)

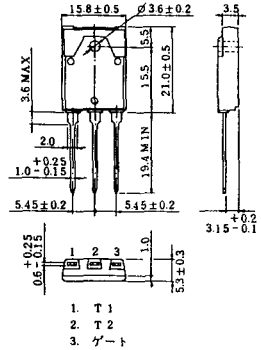


1. $T_1$
2. $T_2$
3. ゲート

《寸法図単位：mm》

## TS-1

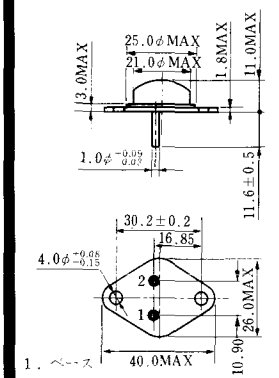


1．ベース
2．エミッタ
コレクタ(ケース)

## TS-2

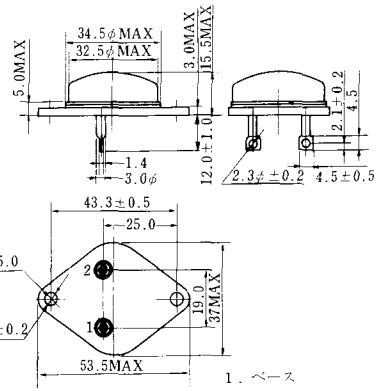


1．ベース
2．エミッタ
コレクタ(ケース)

## TS-3

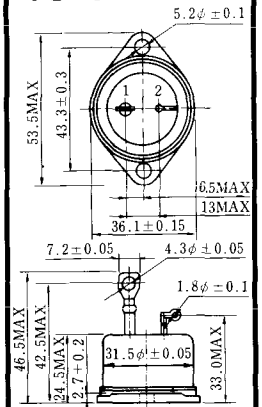


1．エミッタ 2．ベース
コレクタ(ケース)

## TS-4

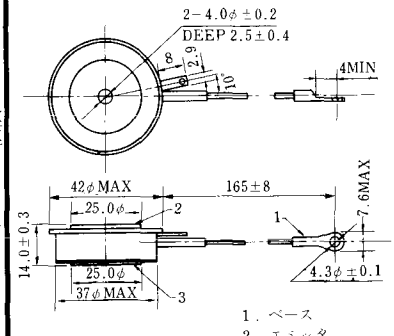


1．ベース
2．エミッタ
3．コレクタ(ケース)

## TS-5

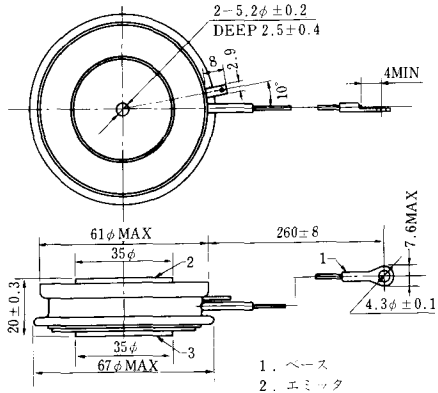


1．ベース
2．エミッタ
3．コレクタ(ケース)

## TS-6

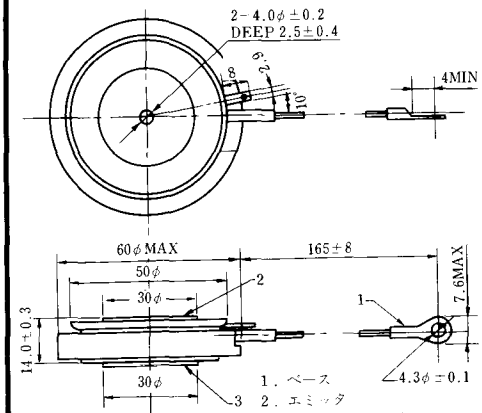


1．ベース
2．エミッタ
3．コレクタ(ケース)

## TS-7

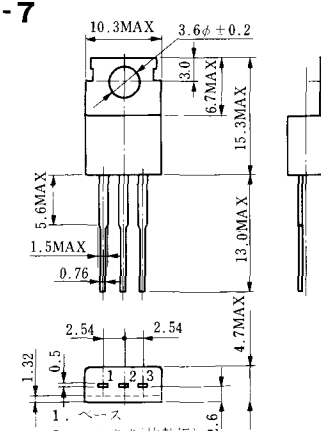


1．ベース
2．コレクタ(放熱板)
3．エミッタ

《寸法図単位：mm》

## TS-8

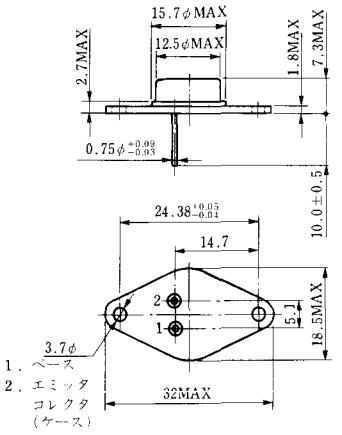
15.7φMAX
12.5φMAX
2.7MAX
1.8MAX
7.3MAX
0.75φ +0.09 −0.03
10.0±0.5
24.38 +0.05 −0.01
14.7
2
1
5.1
18.5MAX
3.7φ
1．ベース
2．エミッタ
コレクタ
（ケース）
32MAX

《寸法図単位：mm》

## S-62A1A

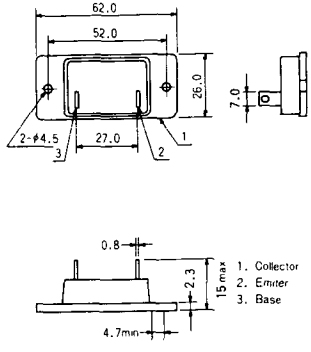


## S-80A1A

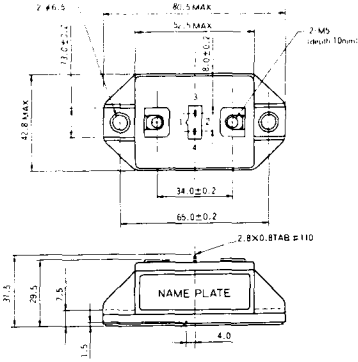


## S-88D1A




## S-92B1A




## S-94B1A

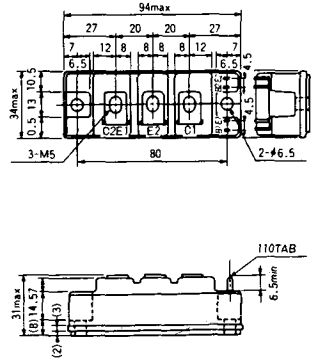


## S-94B1B




《寸法図単位：mm》

## S-94B2A

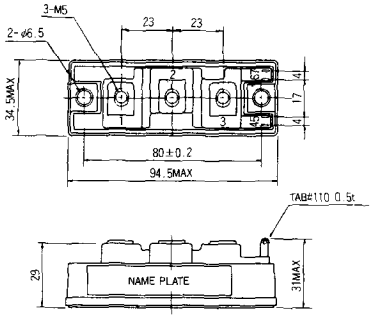


## S-94D1A

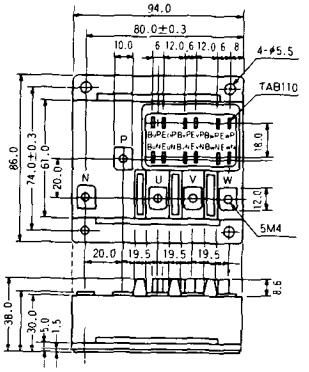


## S-95A1A




## S-95B1A

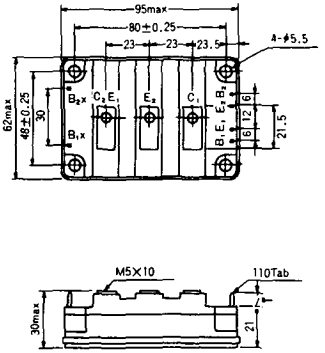


## S-98B1B

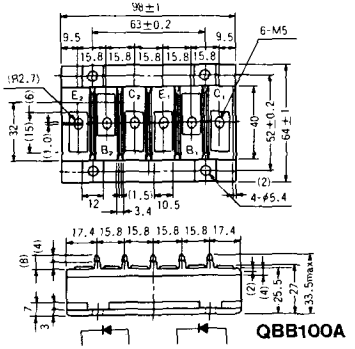


## S-108A2A




《寸法図単位：mm》

## S-108B1A

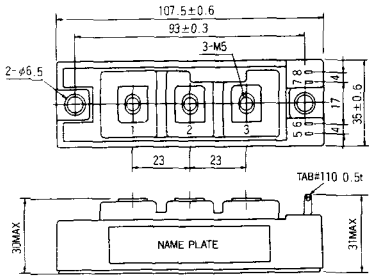


## S-108B1B




## S-108B1C

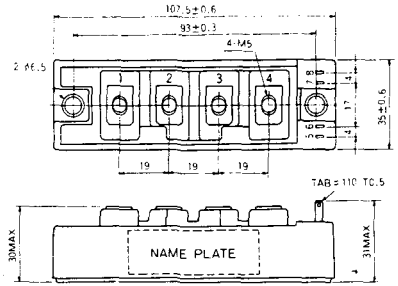


## S-108B2A

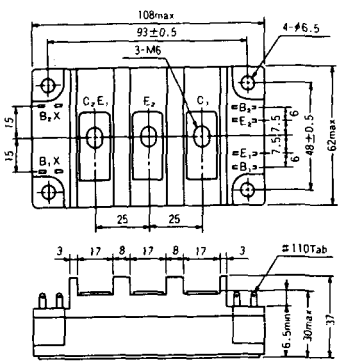


## S-108B2B

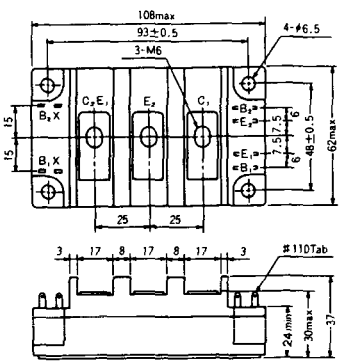


〈寸法図単位:mm〉

## 2-22B1A

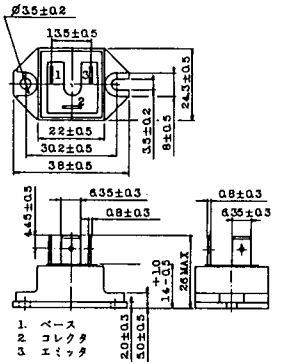


## 2-27A4A

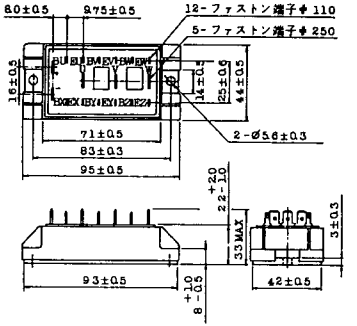


## 2-33C1A

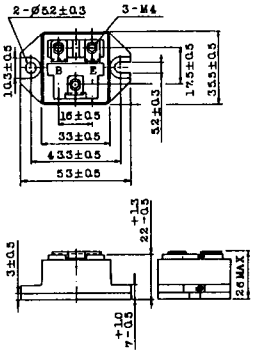


## 2-33D1A




## 2-33F1A

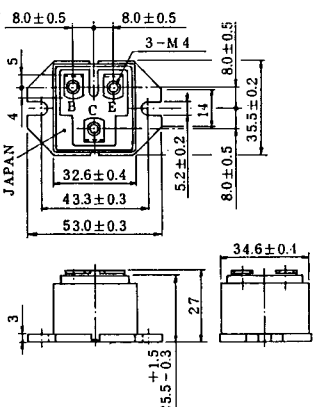


## 2-37A1A

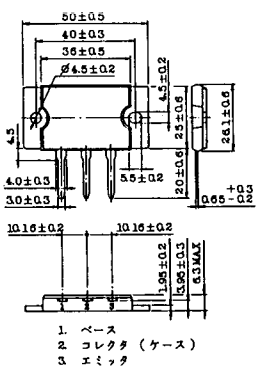


《寸法図単位：mm》

## 2-48A3A




## 2-48A3B




## 2-48A4A

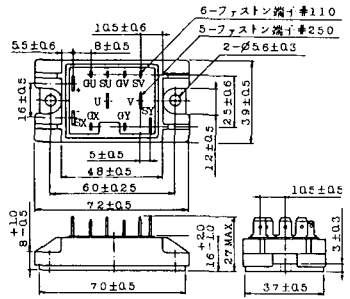


## 2-64A2A

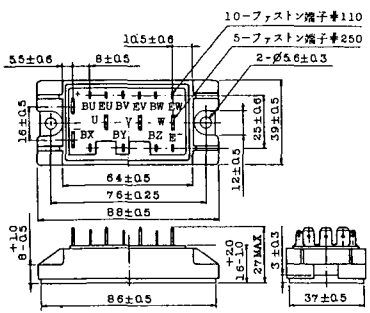


## 2-64A2B

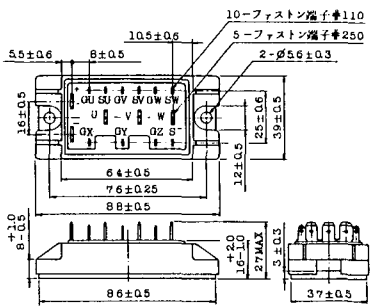


## 2-68A2A

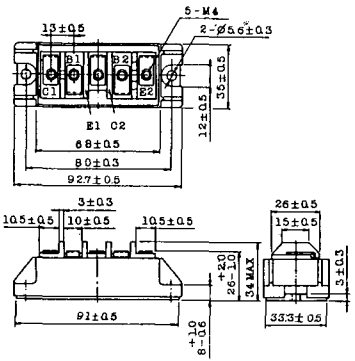


《寸法図単位：mm》

## 2-68B2A

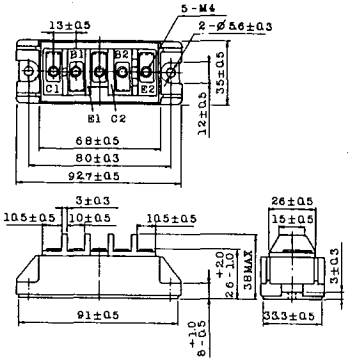


## 2-68C1A

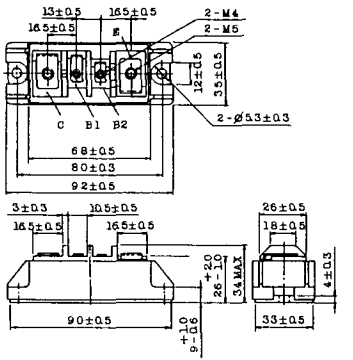


## 2-68D2A

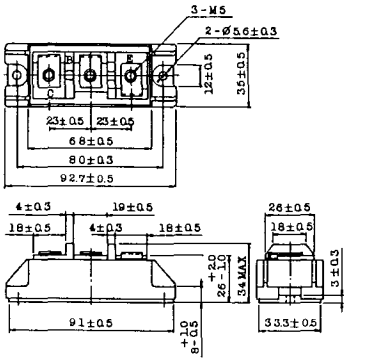


## 2-72A3A

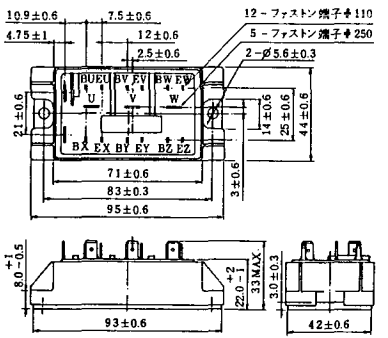


## 2-80A1A

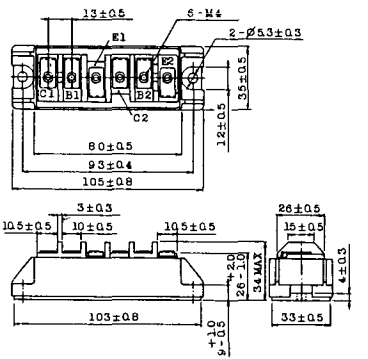


## 2-80B1A




《寸法図単位：mm》

## 2-80C1A

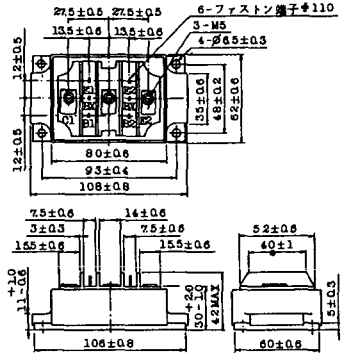


## 2-80D2A

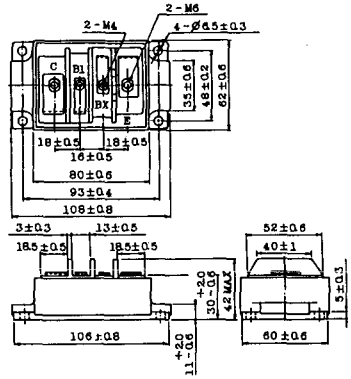


## 2-94A2A

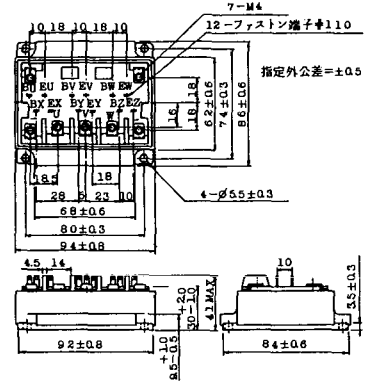


## 2-94B1A

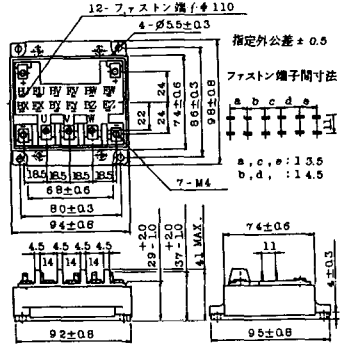


## 2-94C2A

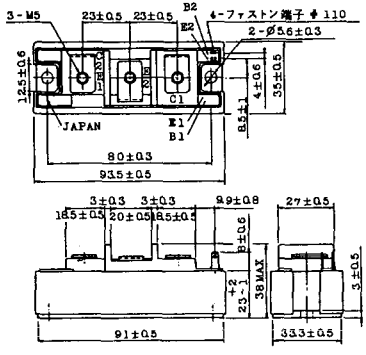


## 2-94C3A

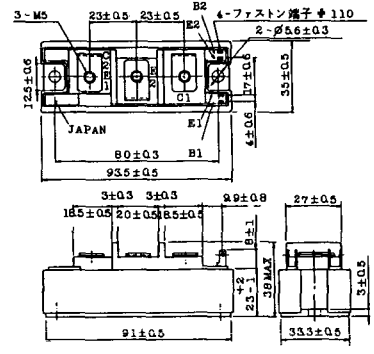


《寸法図単位：mm》

## 2-94D1A

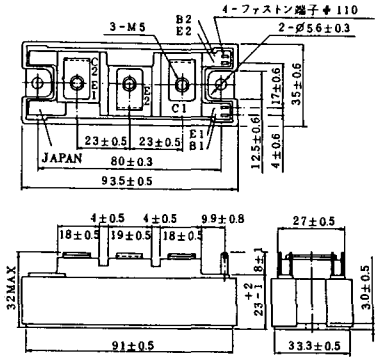


## 2-96A3A

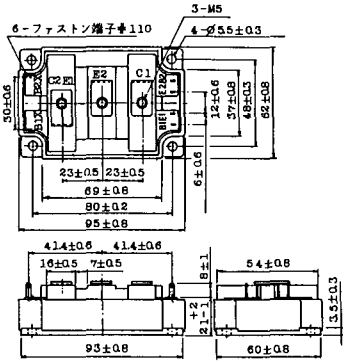


## 2-96A4A

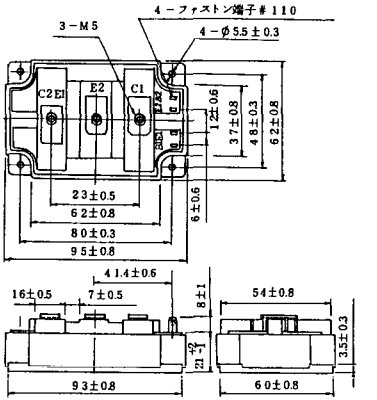


## 2-98B1A

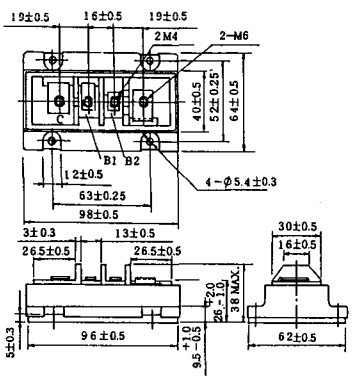


## 2-98C2A

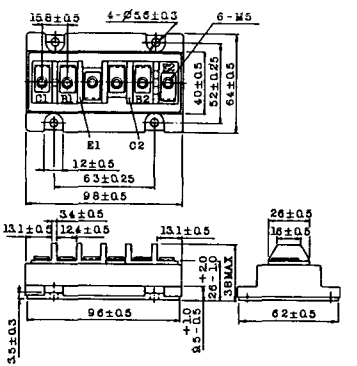


## 2-108A2A

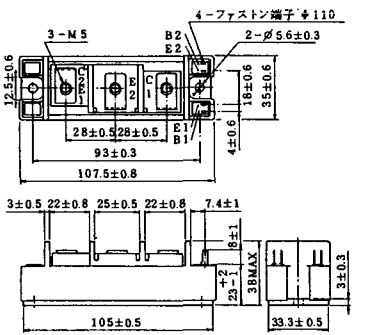


《寸法図単位：mm》

## 2-108B1A

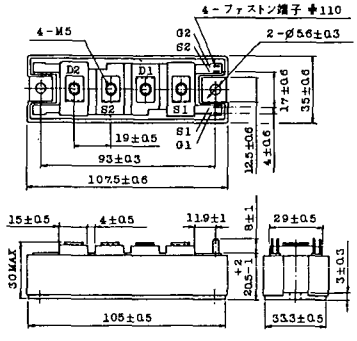


## 2-109A3A

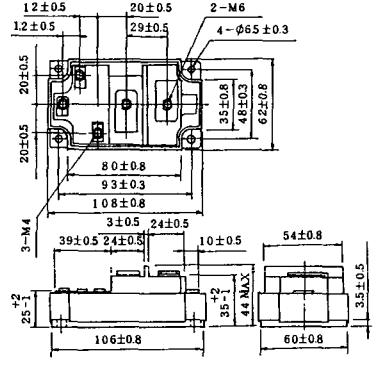


## 2-109A4A

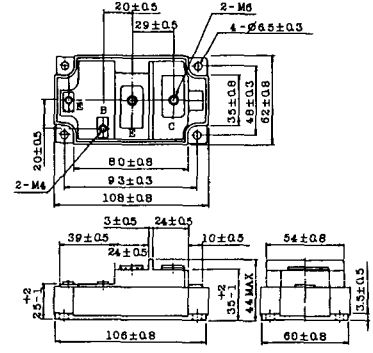


## 2-109B3A

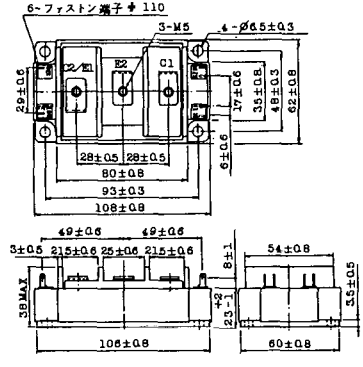


## 2-109B4A

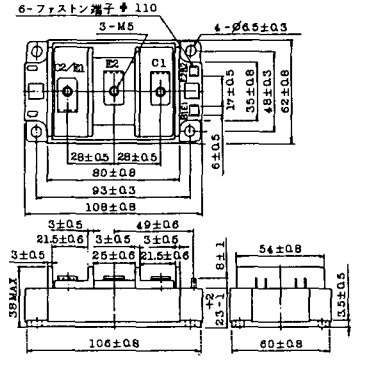


《寸法図単位：mm》

## BBT-II

BBTII
1D200A-020




## BBT-III

BBTIII
ETN31-055
ETM36-030
ETN36-030
ETN35-030

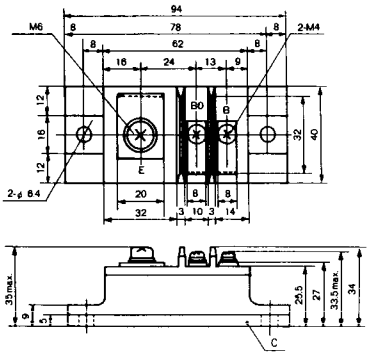


## BBT-III

BBTIII
ETN01-055
ET1257

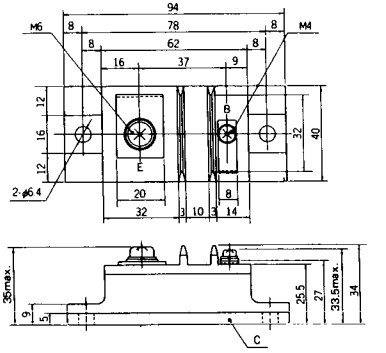


## BBT-IV

BBTIV
1D500A-030

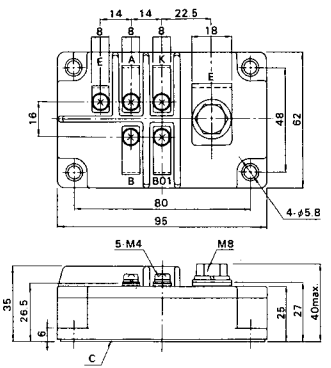


《寸法図単位:mm》

## M-101




## M-102




## M-103

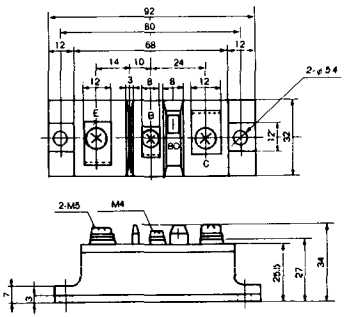


## M-104

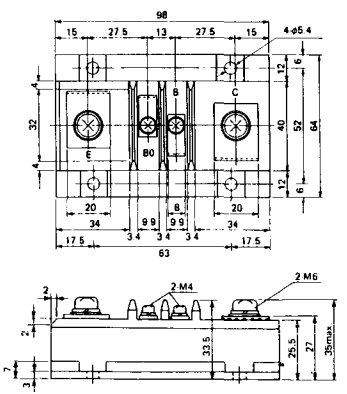


## M-105



## M-106

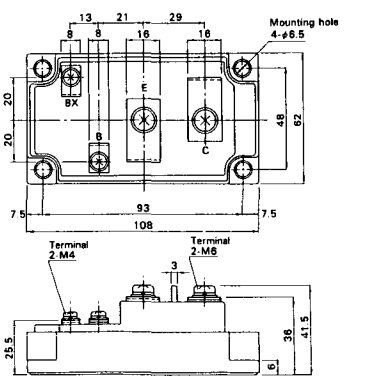


《寸法図単位：mm》

## M-107

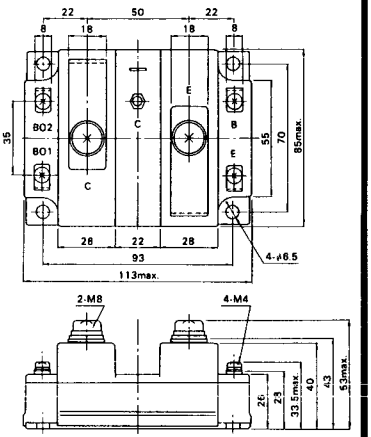


## M-116




《寸法図単位：mm》

## M-201




## M-202

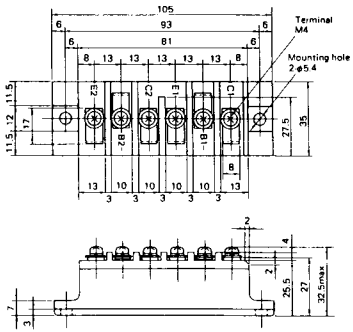


## M-203

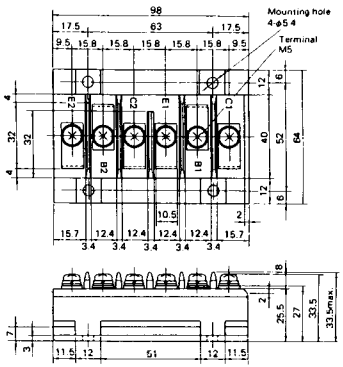


## M-204

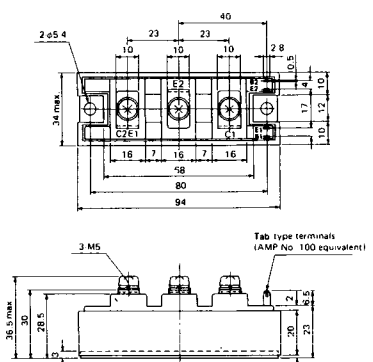


## M-205

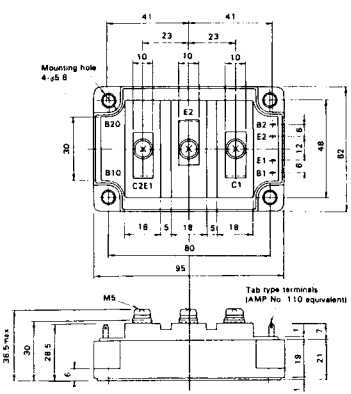


## M-206

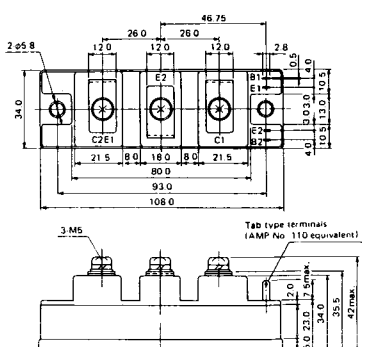


《寸法図単位：mm》

## M-207

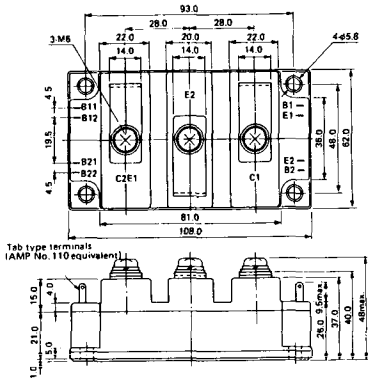


## M-208

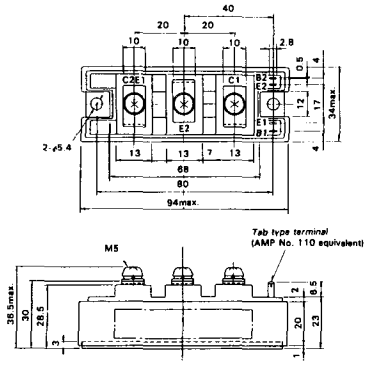


## M-209

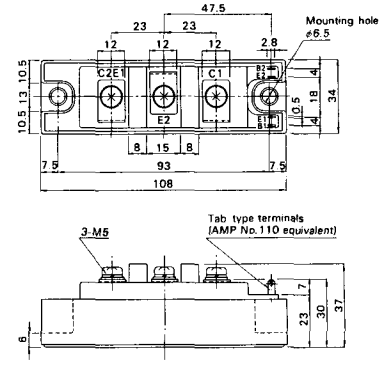


## M-210

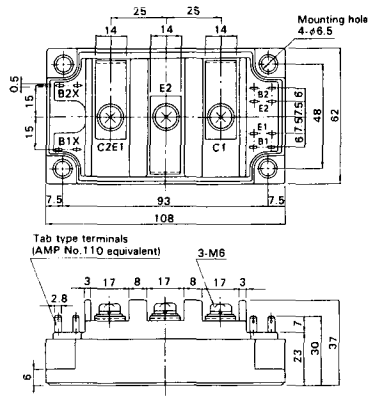


## M-211

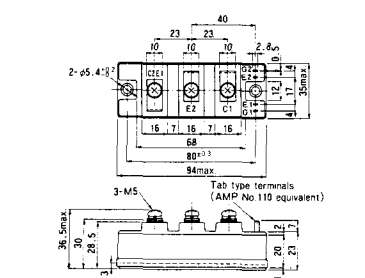


## M-212

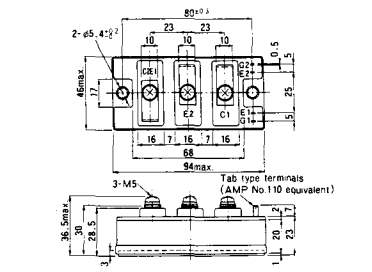


《寸法図単位：mm》

## M-213




## M-214

## M-215




## M-216




## M-217




## M-218




《寸法図単位:mm》

# M-219




〈寸法図単位:mm〉

## M-601

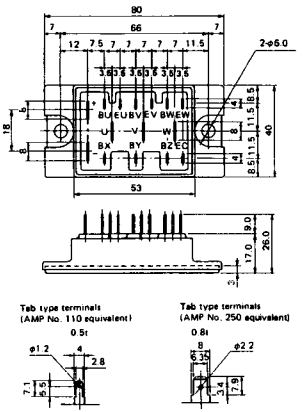


## M-602

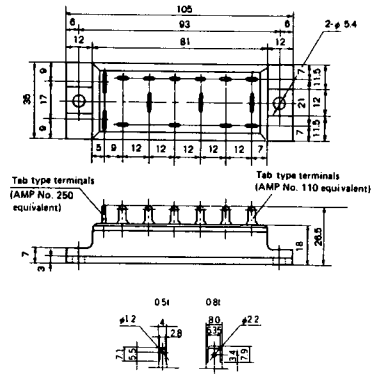


## M-603

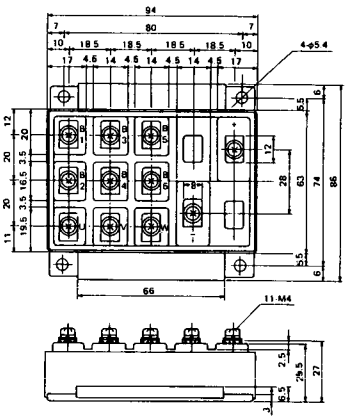


## M-604




## M-605

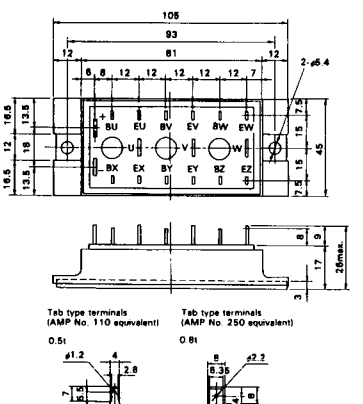


## M-606




《寸法図単位：mm》

## M-607




## M-608




## M-609




## M-610




## M-616




《寸法図単位:mm》

## M-1A1A




## M-2A1A




## M-2B1A




## M-2B2A




## M-2C2A




## M-2D4A

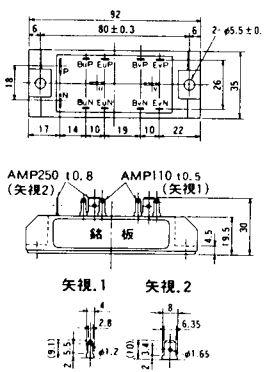


〈寸法図単位:mm〉

## M-2E6A

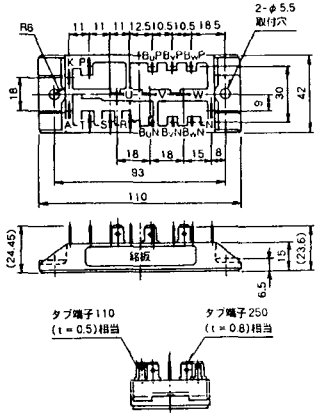


## M-2F6A




## M-2G6A

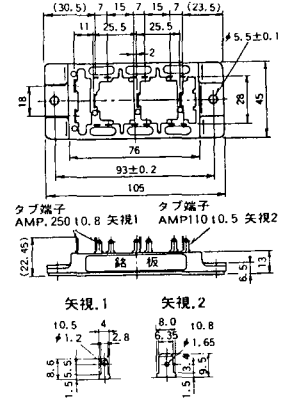


## M-3A1A

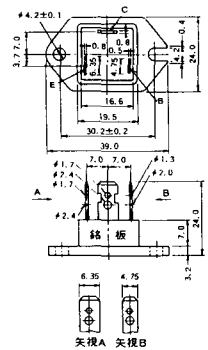


## M-3B1A




## M-3B1B

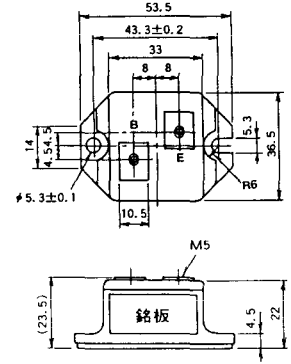


《寸法図単位:mm》

## M-3C1A

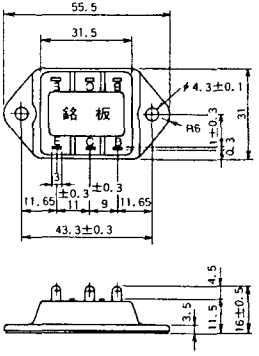


## M-3D6A

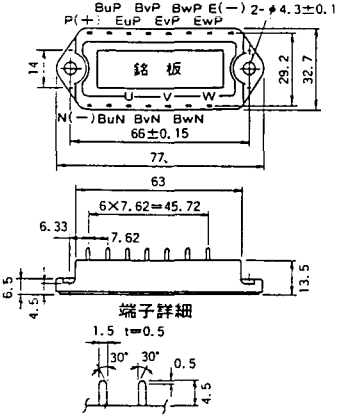


## M-3E6A

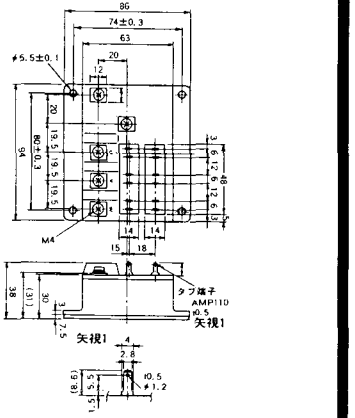


## M-4A1A




## M-4A2A




## M-4A1B




《寸法図単位:mm》

## M-4A2B




## M-4B2A




## M-5A1A




## M-5A1B




## M-5A2A




## M-5B2A




《寸法図単位:mm》

## M-5C2A




## M-5D2A




## M-6A1A

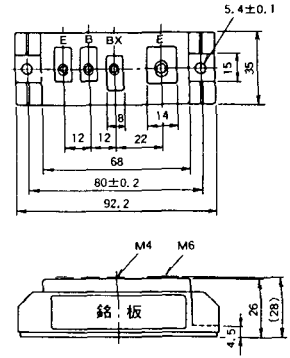


## M-7A1A

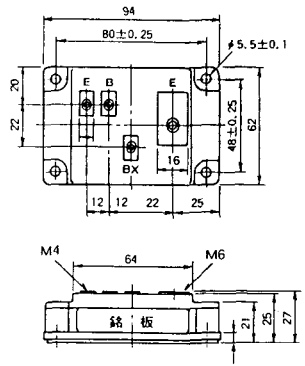


## M-7B1A




## M-8A1A




《寸法図単位:mm》

## M-8A1B




## M-8A2A




## M-8A2B




## M-8B2A

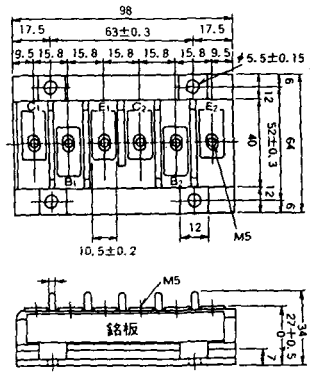


## M-9A1A




## M-9A2A




〈寸法図単位:mm〉

## M-9B1A




## M-9C2A




## M-1A1B

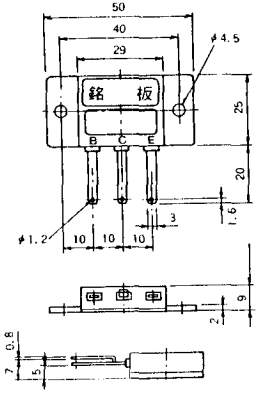


## M-1A1C




## M-2E6B

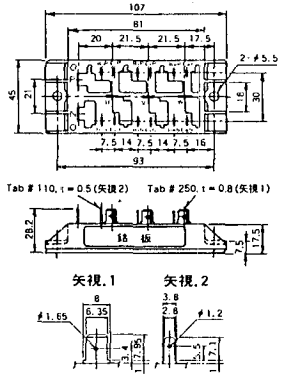


## M-2E6C




《寸法図単位:mm》

## M-2G6B

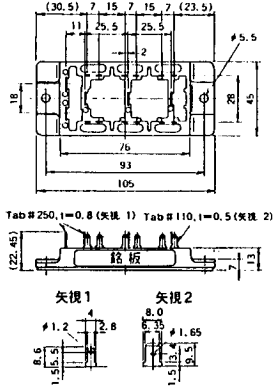


## M-3D6B

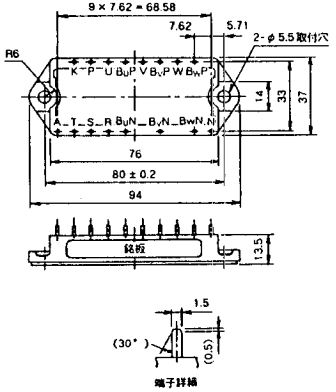


## M-4A2C




## M-7A1B




## M-7C1A




## M-8A2C




《寸法図単位：mm》

## M-10A2A




## M-10A2B




## M-11A2A

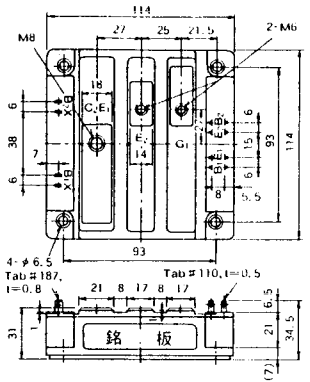


## M-12A6A

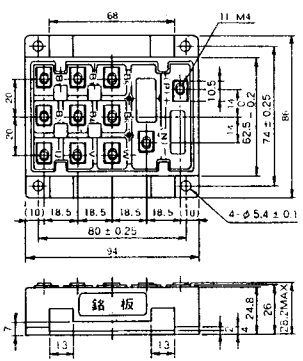


## M-12B6A




## M-12B6B

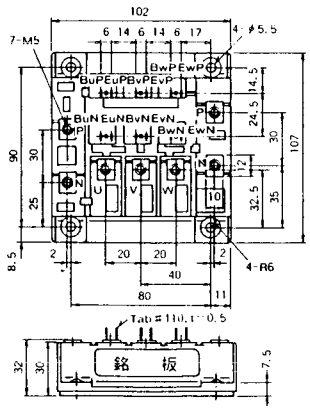


《寸法図単位：mm》

## M-4A2D

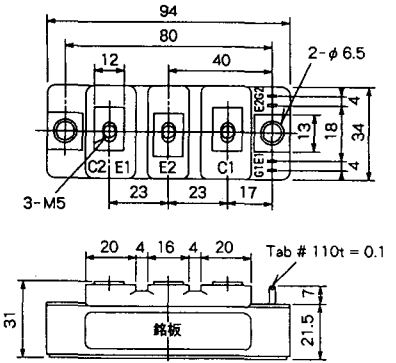


## M-4A2E

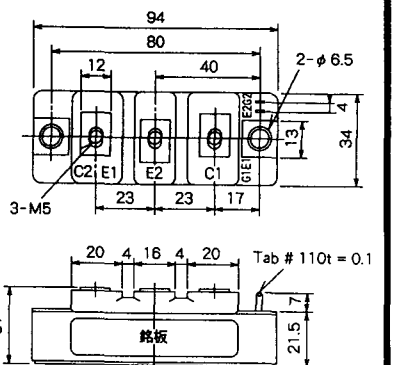


## M-4C2A

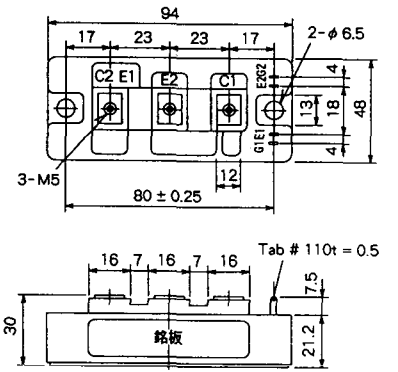


## M-4C2B

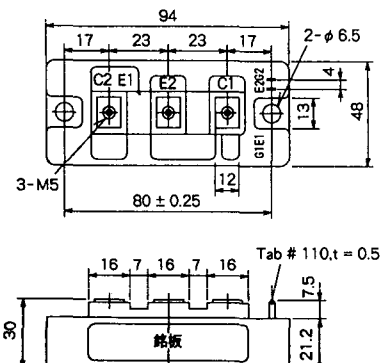


## M-9B1C

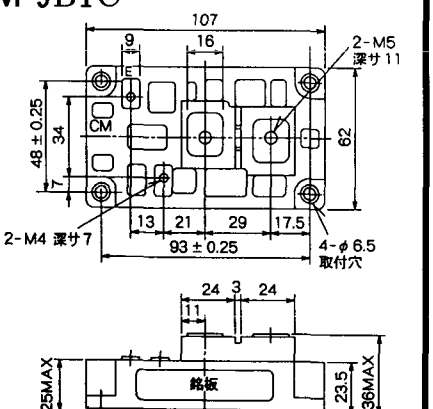


## M-9D2A

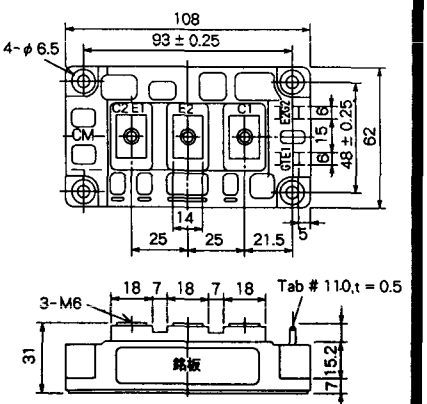


《寸法図単位：mm》

## M-9D2B

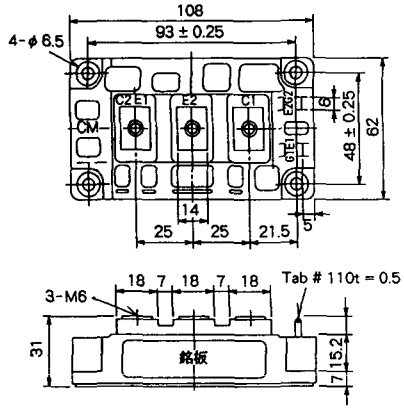


## M-10A2C

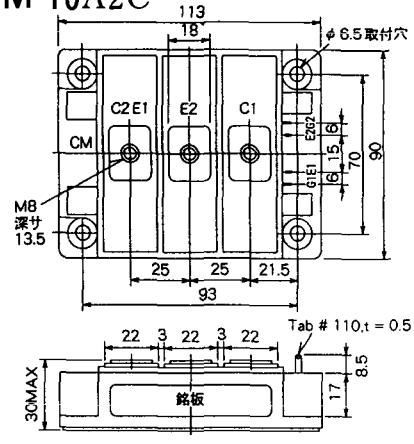


《寸法図単位：mm》

## H-101

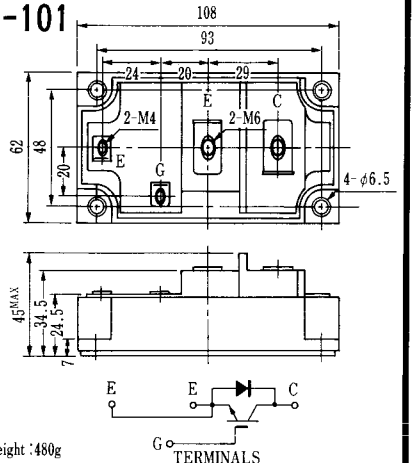


Weight :480g

《寸法図単位:mm》

## H-201

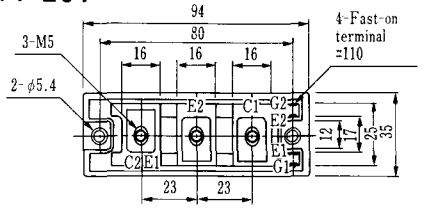








Weight:200g

## H-202

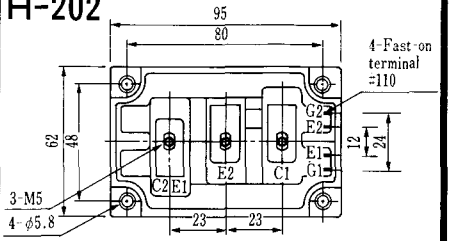








Weight:360g

《寸法図単位:mm》

## LF-J

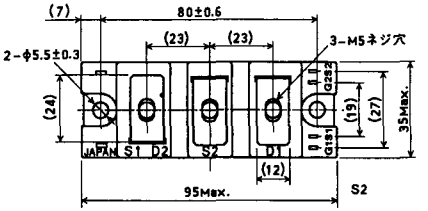





## LF-K

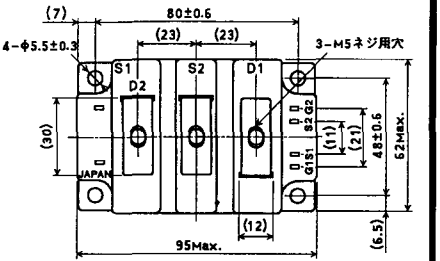





《寸法図単位：mm》

## U-1

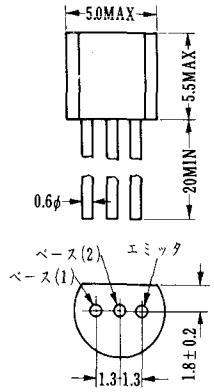


## U-2

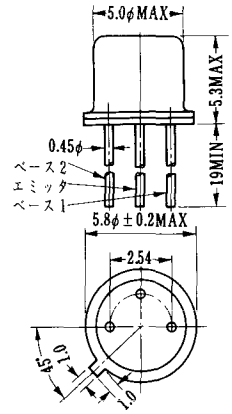


## U-3

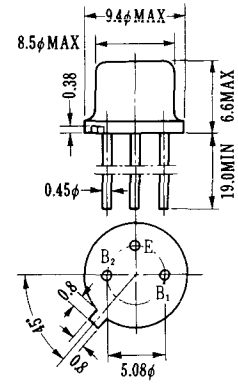


## U-4

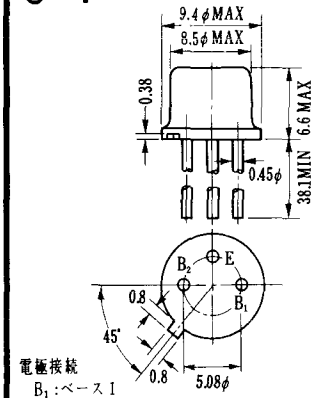


電極接続
$B_1$：ベースI
$B_2$：ベース2
E：エミッタ

## U-5

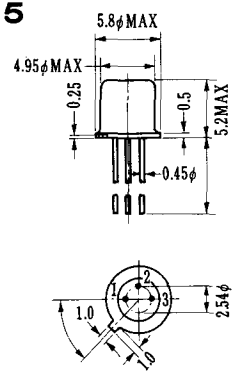


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

## U-6

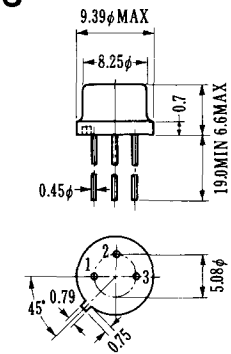


1. BASE(2)
2. EMITTER
3. BASE(1)

## U-7

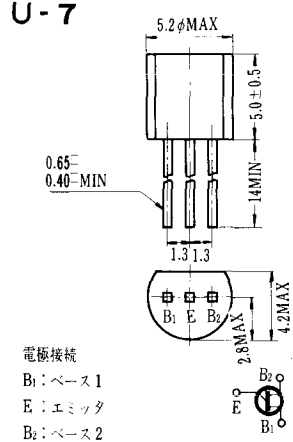


電極接続
$B_1$：ベース1
E：エミッタ
$B_2$：ベース2

## U-8

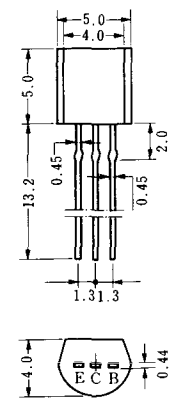


〈寸法図単位：mm〉