





トランジスタ・モジュール [NPN, 1アーム (DCチョップ用)]

- DCチョップ用
- ダーリントン・トランジスタ1個内蔵
- フリーホイール・ダイオード付
- 絶縁形
- UL認定済

Yellow Card No.: E80276 (N)
File No.: E80271







■等価回路



注1. $I_C = 1A$, $V_{EB} = 2V$, #印は V_{CEX} ($V_{EB} = 2V$)。 注2. 60Hz, 単相半波1サイクル波高値。 注3. $T_c = 25^\circ C$ 。 注4. AC, 1分間。


型 名	最 大 定 格 (T _J = 25℃)											電 気 的 特 性											
	V _{CEO}	V _{CEX (SUS)}	V _{EB0}	I _C	I _B	I _F	I _{FM}	P _C	T _J	T _{JA}	V _{ISO}	I _{CEX}			I _{EB0}			V _{CEO (SUS)}			h _{FE}		
	(V)	(注1) (V)	(V)	(A)	(A)	(A)	(注2) (A)	(W)	(℃)	(℃)	(注4) (V)	(mA)	V _{CE}	V _{EB}	(mA)	V _{EB}	(V)	I _C	最 小	V _{CE}	I _C		
													最大	(V)	(V)	最大	(V)	最 小	(A)		(V)	(A)	
QM30E2Y-H	600	600	7	30	1.8	30	600	250	150	-40~125	2500	1	600	2	200	7			75/100	2/5	30		
QM30E2Y-2H	1000	1000	7	30	2.0	30	600	310	150	-40~125	2500	1	1000	2	200	7			75/100	2.8/5	30		
QM30E3Y-H	600	600	7	30	1.8	30	600	250	150	-40~125	2500	1	600	2	200	7			75/100	2/5	30		
QM30E3Y-2H	1000	1000	7	30	2.0	30	600	310	150	-40~125	2500	1	1000	2	200	7			75/100	2.8/5	30		
QM50E2Y-H	600	600	7	50	3.0	50	500	310	150	-40~125	2500	1	600	2	200	7			75/100	2/5	50		
QM50E2Y-2H	1000	1000	7	50	3.0	50	500	400	150	-40~125	2500	1	1000	2	200	7			75/100	2.8/5	50		
QM50E3Y-H	600	600	7	50	3.0	50	500	310	150	-40~125	2500	1	600	2	200	7			75/100	2/5	50		
QM50E3Y-2H	1000	1000	7	50	3.0	50	500	400	150	-40~125	2500	1	1000	2	200	7			75/100	2.8/5	50		
QM75E2Y-H	600	600	7	75	4.5	75	750	350	150	-40~125	2500	1	600	2	200	7			75/100	2/5	75		
QM75E2Y-2H	1000	1000	7	75	4.0	75	750	500	150	-40~125	2500	1	1000	2	100	7			75/100	2.8/5	75		
QM75E3Y-H	600	600	7	75	4.5	75	750	350	150	-40~125	2500	1	600	2	200	7			75/100	2/5	75		
QM75E3Y-2H	1000	1000	7	75	4.0	75	750	500	150	-40~125	2500	1	1000	2	100	7			75/100	2.8/5	75		
QM100E2Y-H	600	600	7	100	6.0	100	1000	620	150	-40~125	2500	2	600	2	300	7			75/100	2/5	100		
QM100E2Y-2H	1000	1000	7	100	5.0	100	1000	800	150	-40~125	2500	2	1000	2	400	7			75/100	2.8/5	100		
QM100E3Y-H	600	600	7	100	6.0	100	1000	620	150	-40~125	2500	2	600	2	300	7			75/100	2/5	100		
QM100E3Y-2H	1000	1000	7	100	5.0	100	1000	800	150	-40~125	2500	2	1000	2	400	7			75/100	2.8/5	100		
QM150E2Y-H	600	600	7	150	9.0	150	1500	690	150	-40~125	2500	2	600	2	150	7			75/100	2/5	150		
QM150E2Y-2H	1000	1000	7	150	8.0	150	1500	1000	150	-40~125	2500	2	1000	2	200	7			75/100	2.8/5	150		
QM150E3Y-H	600	600	7	150	9.0	150	1500	690	150	-40~125	2500	2	600	2	150	7			75/100	2/5	150		
QM150E3Y-2H	1000	1000	7	150	8.0	150	1500	1000	150	-40~125	2500	2	1000	2	200	7			75/100	2.8/5	150		

■スイッチング時間測定回路




ベース情報


(T _J = 25℃)										エミッタ・コレクタ間ダイオード						熱抵抗		等価回路	外形図	記	事	型	名	
飽和電圧 (V)		I _C	I _B	スイッチング時間 (μs)			I _{B1}	I _{B2}	V _{CE}	I _C	V _F (V)	I _F	t _{rr} (μs)	I _F	V _R	di/dt (A/μs)	θ _{J-C} (℃/W)							
V _{CE}	V _{BE}			t _{on}	t _{off}	t _f											トランサ部分							ダイオード部
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(V)	(A)	最大	(A)	最大	(A)	(V)	(A/μs)	最大	最大						
2.0	2.5	30	0.4	1.5	12	3.0	0.6	-0.6	300	30	1.85	30					0.5	2.0	EY-1A	M-4A1B			QM30E2Y-H	
2.5	3.5	30	0.6	2.5	15	3.0	0.6	-0.6	600	30	1.8	30					0.4	1.5	EY-2A	M-4A1B			QM30E2Y-2H	
2.0	2.5	30	0.4	1.5	12	3.0	0.6	-0.6	300	30	1.85	30					0.5	2.0	EY-1C	M-4A1B			QM30E3Y-H	
2.5	3.5	30	0.6	2.5	15	3.0	0.6	-0.6	600	30	1.8	30					0.4	1.5	EY-2C	M-4A1B			QM30E3Y-2H	
2.0	2.5	50	0.65	1.5	12	3.0	1.0	-1.0	300	50	1.75	50					0.4	1.3	EY-1A	M-4A1B			QM50E2Y-H	
2.5	3.5	50	1.0	2.5	15	3.0	1.0	-1.0	600	50	1.8	50					0.31	1.2	EY-2A	M-4A1B			QM50E2Y-2H	
2.0	2.5	50	0.65	1.5	12	3.0	1.0	-1.0	300	50	1.75	50					0.4	1.3	EY-1C	M-4A1B			QM50E3Y-H	
2.5	3.5	50	1.0	2.5	15	3.0	1.0	-1.0	600	50	1.8	50					0.31	1.2	EY-2C	M-4A1B			QM50E3Y-2H	
2.0	2.5	75	1.0	2.5	12	3.0	1.5	-1.5	300	75	1.85	75					0.35	1.3	EY-1A	M-4A1B			QM75E2Y-H	
2.5	3.5	75	1.5	2.5	15	3.0	1.5	-1.5	600	75	1.8	75					0.25	1.2	EY-2A	M-5A1B			QM75E2Y-2H	
2.0	2.5	75	1.0	2.5	12	3.0	1.5	-1.5	300	75	1.85	75					0.35	1.3	EY-1C	M-4A1B			QM75E3Y-H	
2.5	3.5	75	1.5	2.5	15	3.0	1.5	-1.5	600	75	1.8	75					0.25	1.2	EY-2C	M-5A1B			QM75E3Y-2H	
2.0	2.5	100	1.3	2.0	12	3.0	2.0	-2.0	300	100	1.75	100					0.2	0.65	EY-1B	M-8A1B			QM100E2Y-H	
2.5	3.5	100	2.0	3.0	15	3.0	2.0	-2.0	600	100	1.8	100					0.155	0.65	EY-2B	M-9A1A			QM100E2Y-2H	
2.0	2.5	100	1.3	2.0	12	3.0	2.0	-2.0	300	100	1.75	100					0.2	0.65	EY-1D	M-8A1B			QM100E3Y-H	
2.5	3.5	100	2.0	3.0	15	3.0	2.0	-2.0	600	100	1.8	100					0.155	0.65	EY-2D	M-9A1A			QM100E3Y-2H	
2.0	2.5	150	2.0	2.5	12	3.0	3.0	-3.0	300	150	1.85	150					0.18	0.6	EY-1B	M-8A1B			QM150E2Y-H	
2.5	3.5	150	3.0	3.0	15	3.0	3.0	-3.0	600	150	1.8	150					0.125	0.6	EY-2B	M-9A1A			QM150E2Y-2H	
2.0	2.5	150	2.0	2.5	12	3.0	3.0	-3.0	300	150	1.85	150					0.18	0.6	EY-1D	M-8A1B			QM150E3Y-H	
2.5	3.5	150	3.0	3.0	15	3.0	3.0	-3.0	600	150	1.8	150					0.125	0.6	EY-2D	M-9A1A			QM150E3Y-2H	



FD-9

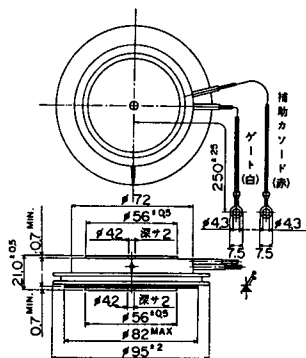


FD-10

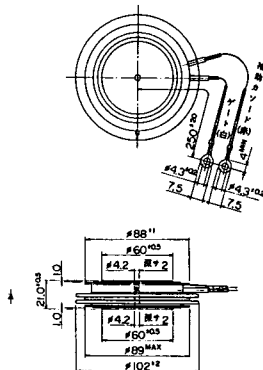


FD-11

FD-12


H-1

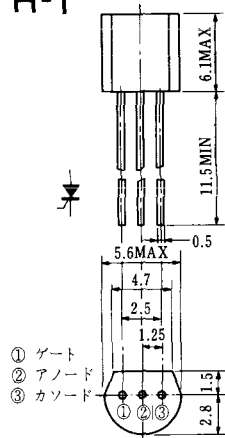


H-2

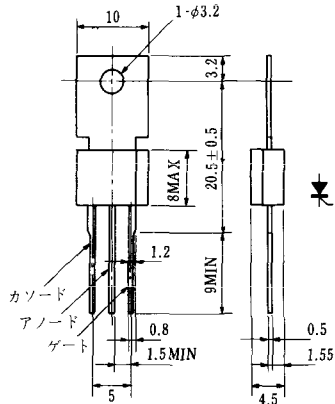

H-3




H-4

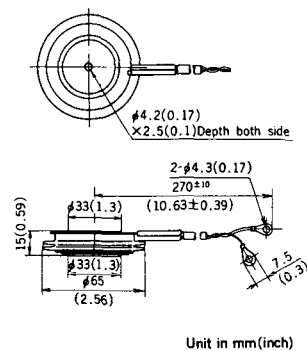


Unit in mm (inch)

H-5




Unit in mm (inch)


H-6

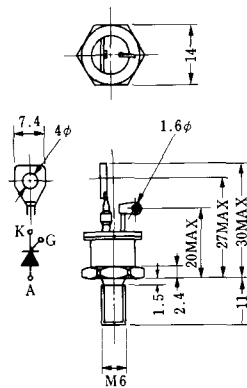


H-7

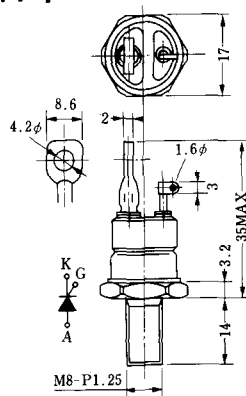

H-8A




H-8B




K G
A

① アノード
② カソード
③ ゲート

H-9A




H-9B




- ① アノード
② カソード
③ ゲート


H-10

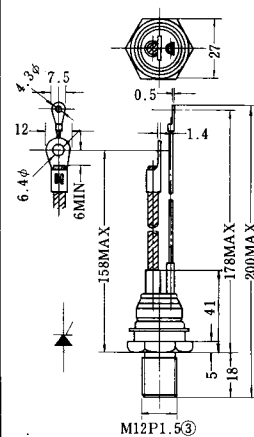


H-11

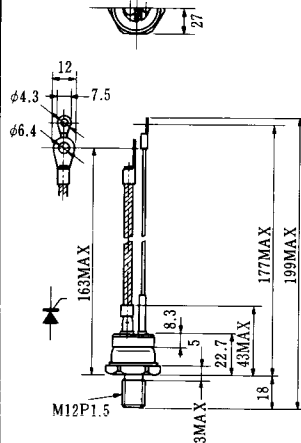


H-12

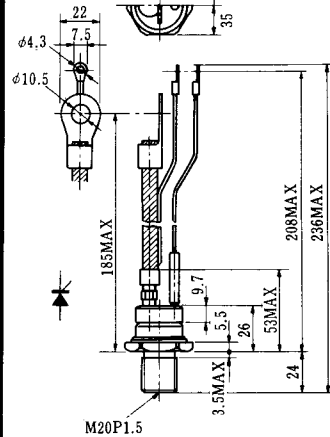

H-13

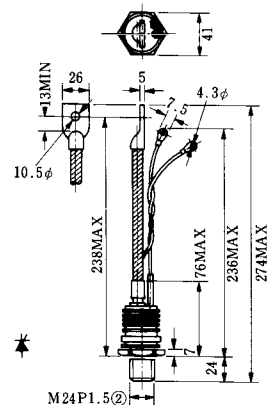


H-14




Unit in mm (inch)

H-15




Unit in mm (inch)


H-16

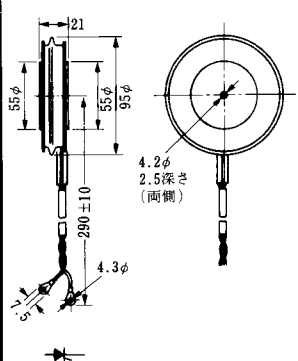


H-17

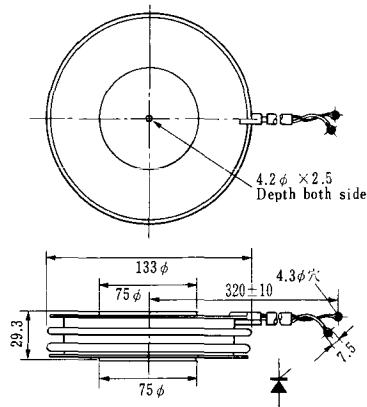


H-18




H-19

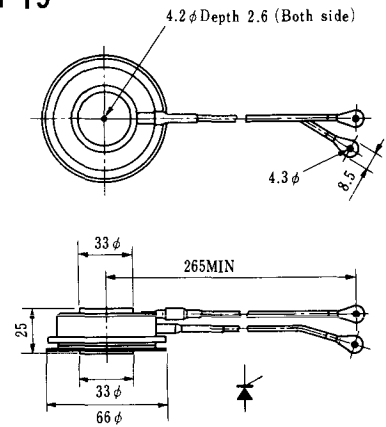


H-20

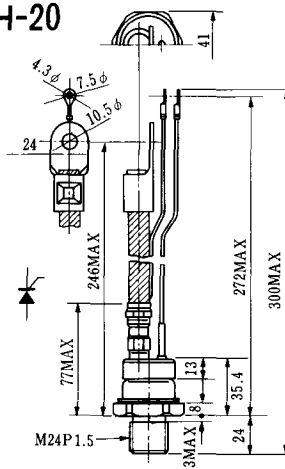


H-21

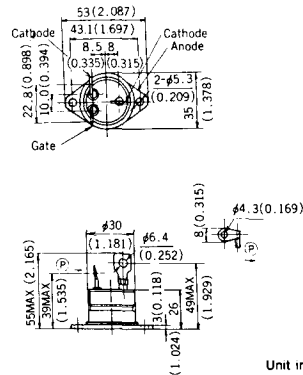


H-22

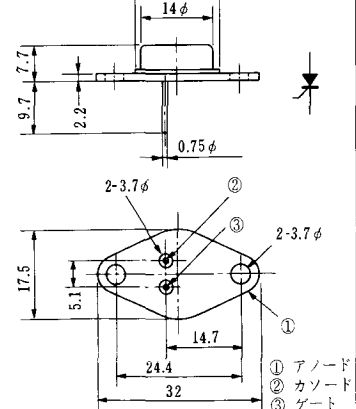


H-23

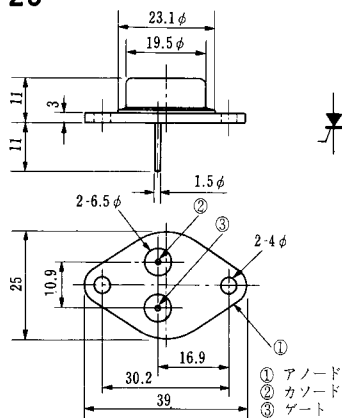


H-24

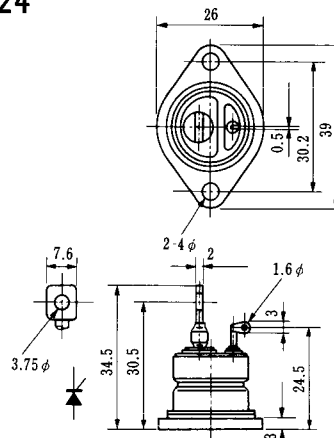

H-25

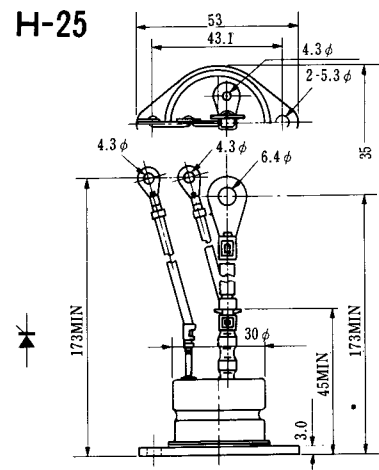


H-26

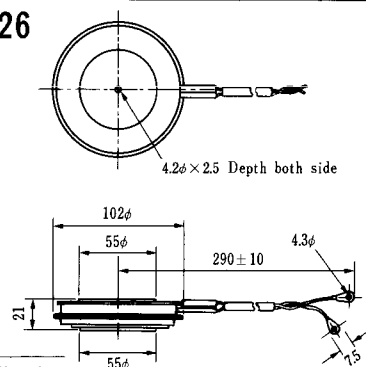

Type	Direction of polarity
CA12	


H-27



Type	Direction of polarity
CF11V	


(注) CC11V: 400 ± 10
CF11V: 250 ± 10

H-28

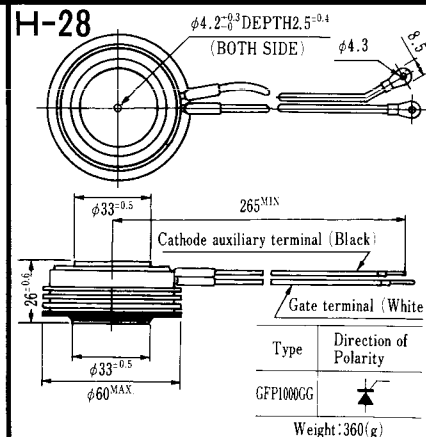


Note: The thickness is a dimension in press at the rated mounting force.

H-29

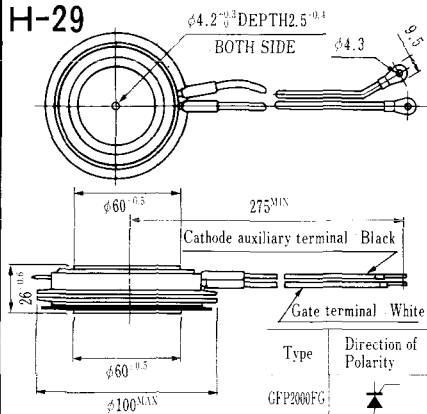


Note : The thickness is a dimension in press at the rated mounting force.

H-30

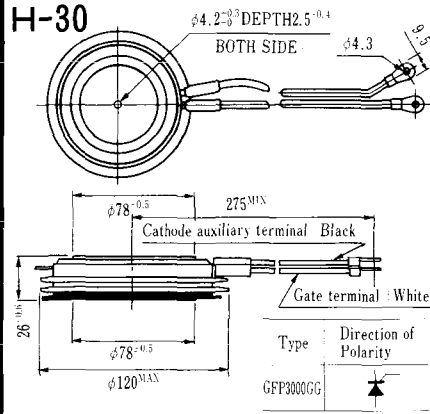



Note : The thickness is a dimension in press at the rated mounting force.

HT-1

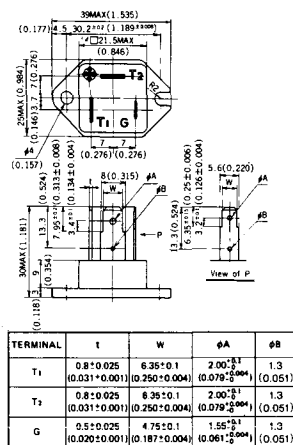


Unit in mm (inch)


HT-2

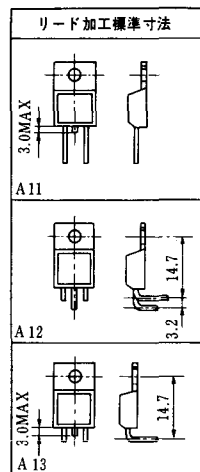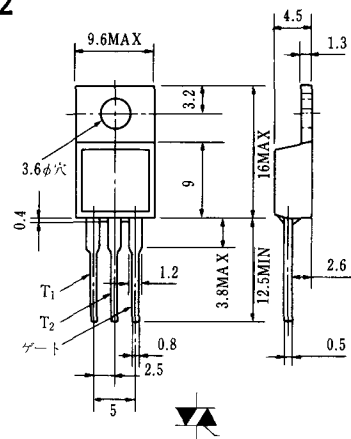


HT-3

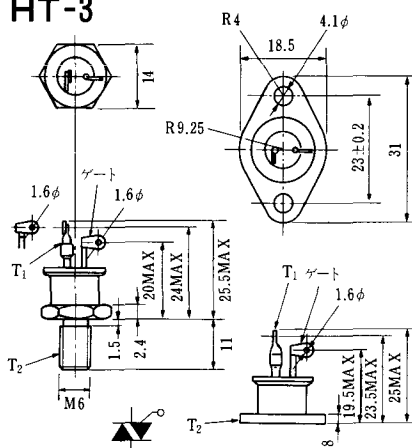

HT-4

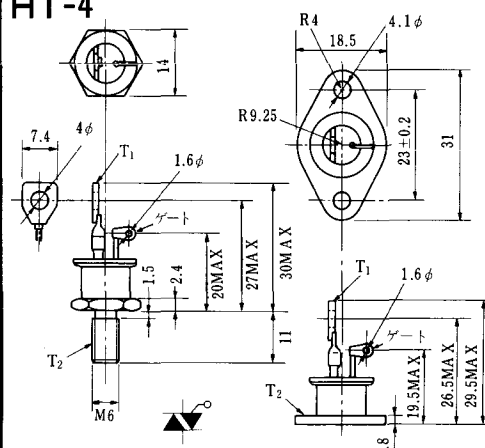


HT-5

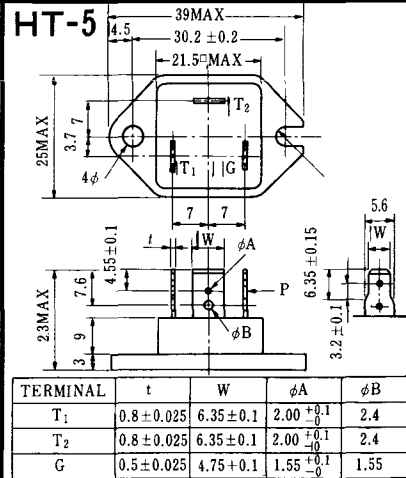


《寸法図単位：mm》


M-1

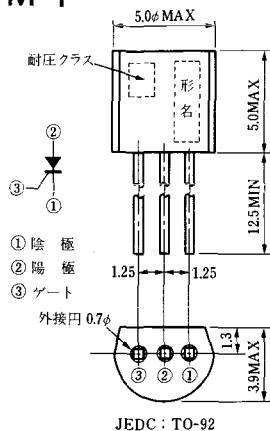


M-2

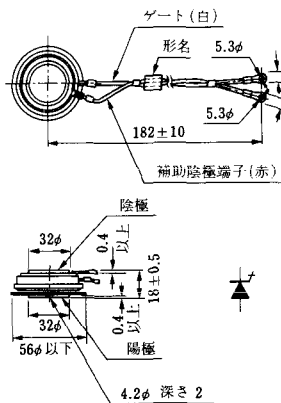


M-3

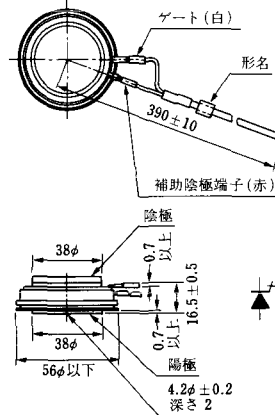


M-4

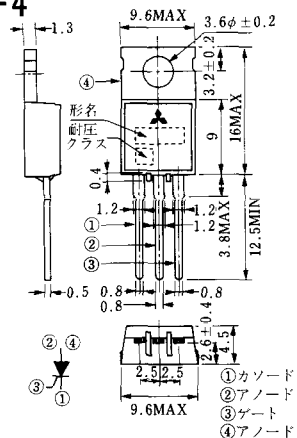


M-5

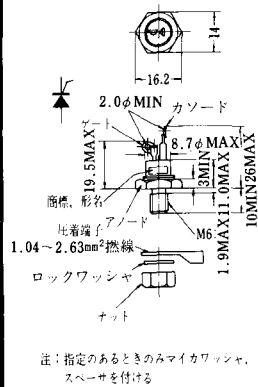


M-6

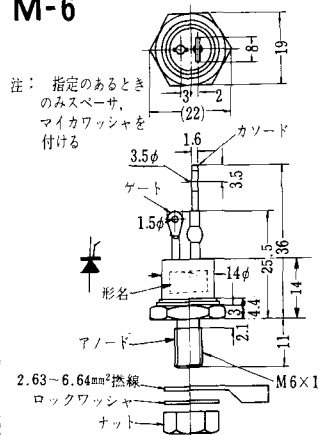


M-7

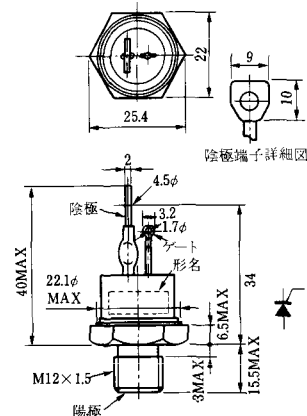


M-8

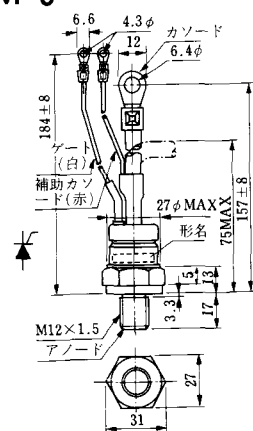


M-9

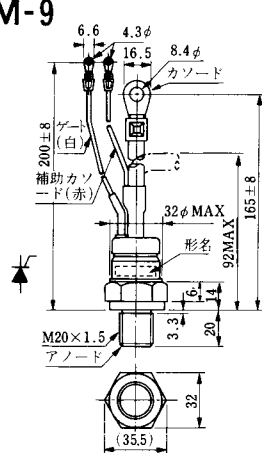


M-10

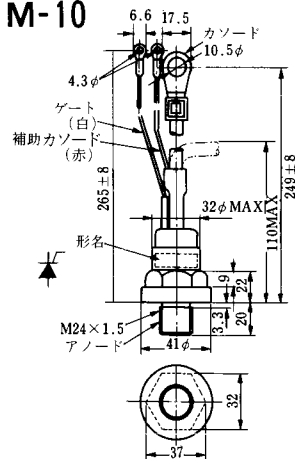


M-11

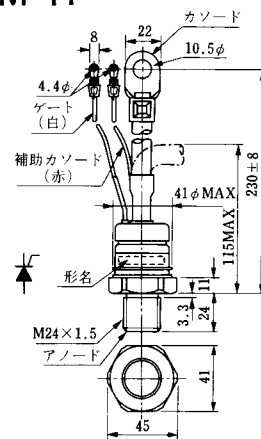


M-12

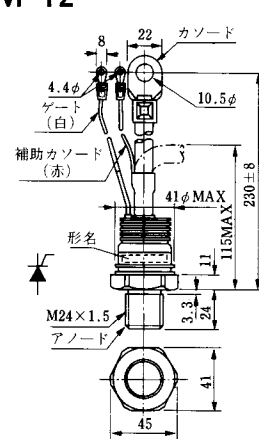


M-13

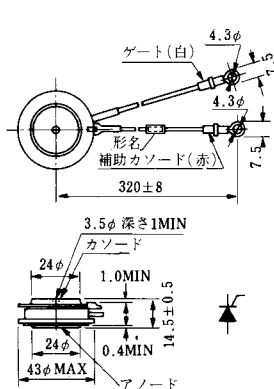


M-14

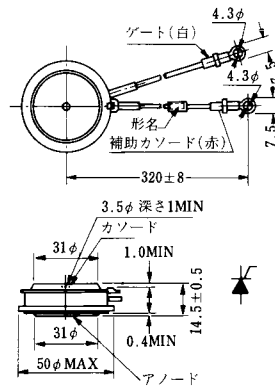


M-15

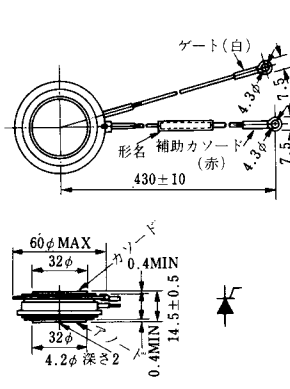


M-16

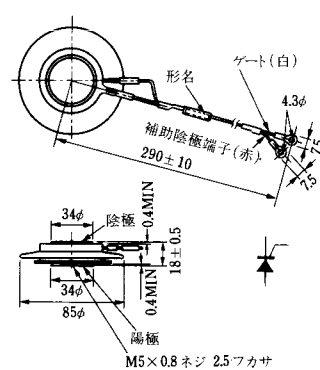


M-17

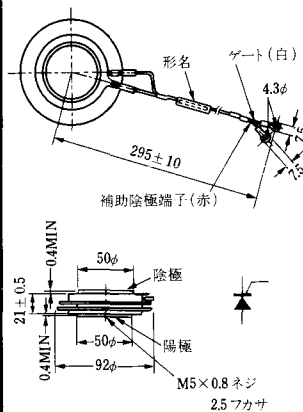


M-18

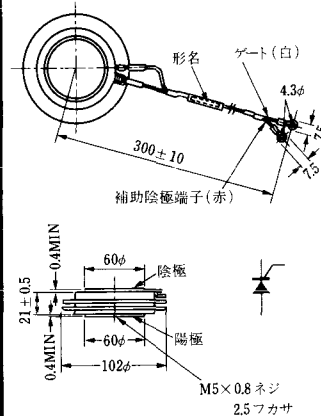


M-19

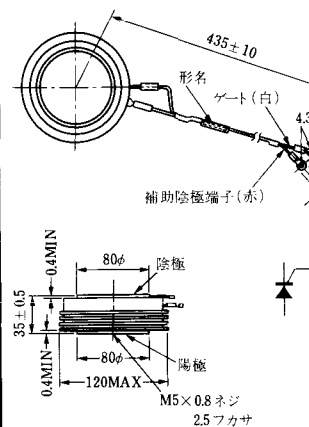


M-20

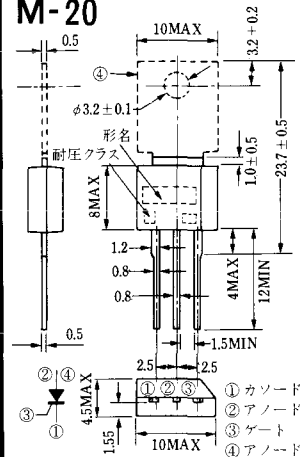


M-21

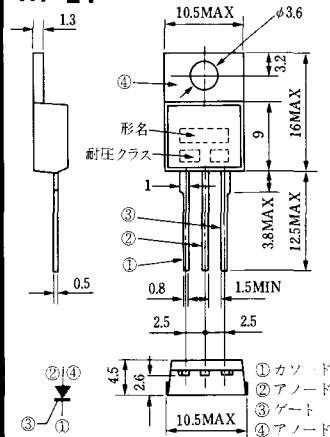


M-22

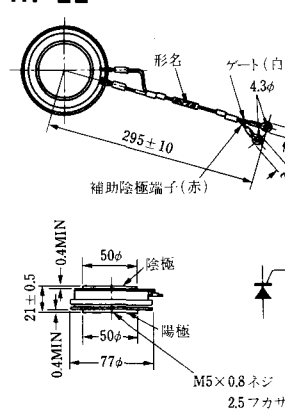


M-23

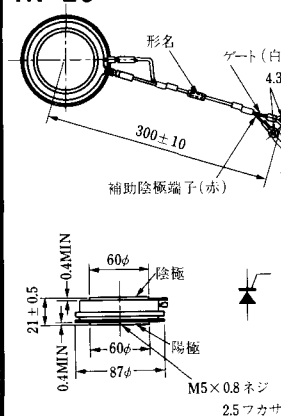


M-24

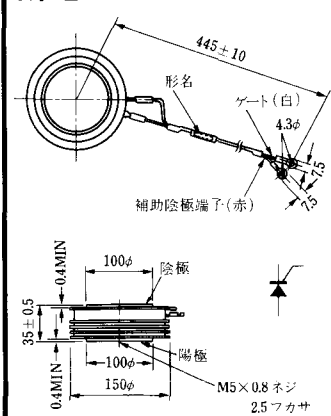


M-25

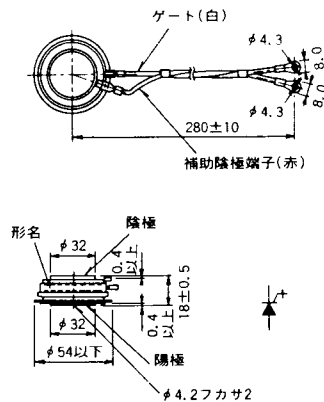


M-26

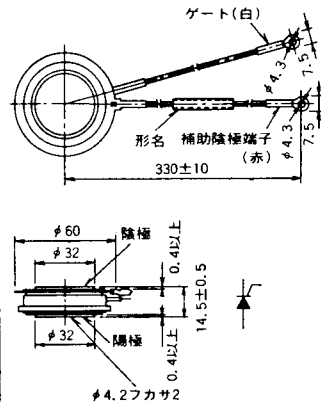


M-27

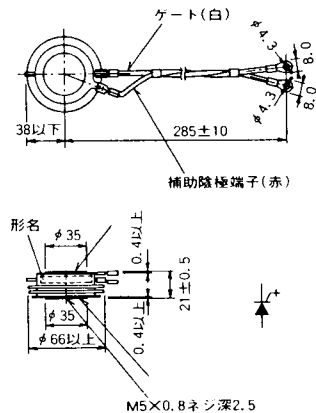


M-28

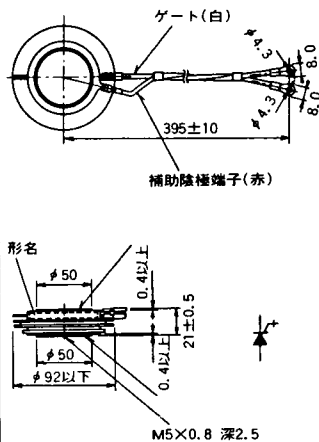


M-29

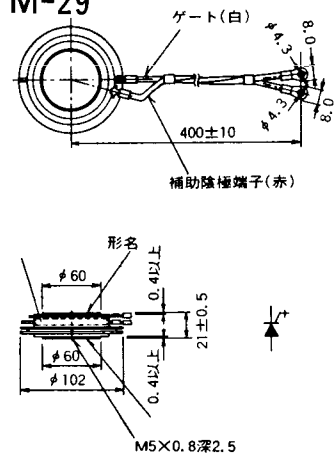


M-30

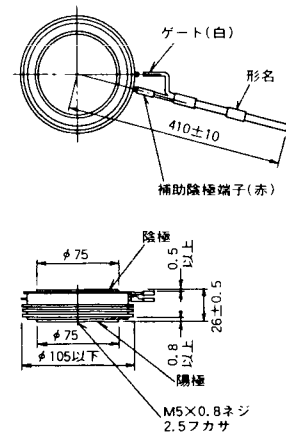


M-31

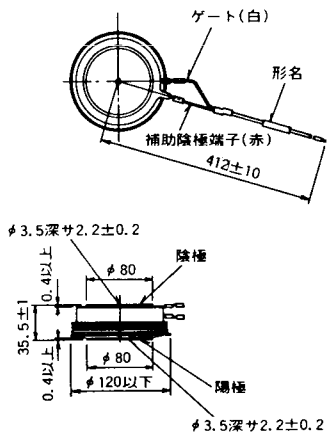


M-32

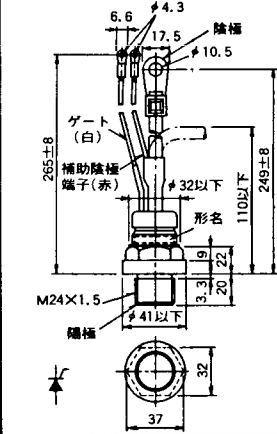


M-33

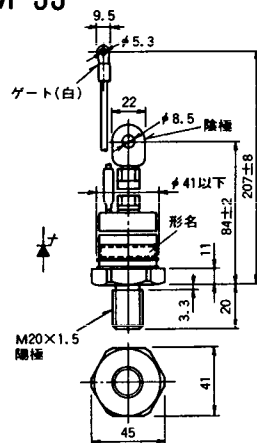


M-34

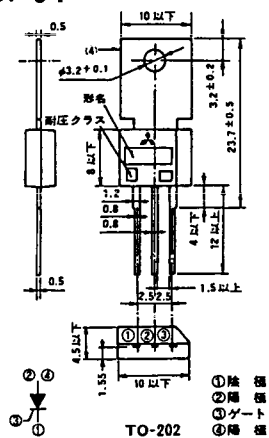


MT-1

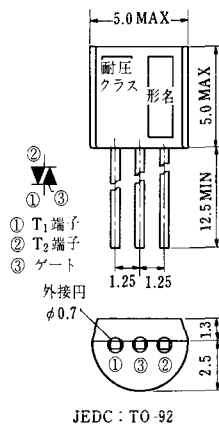


MT-2

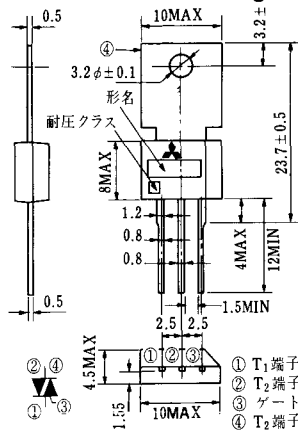


MT-3

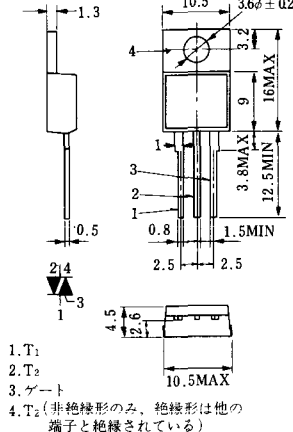


MT-4

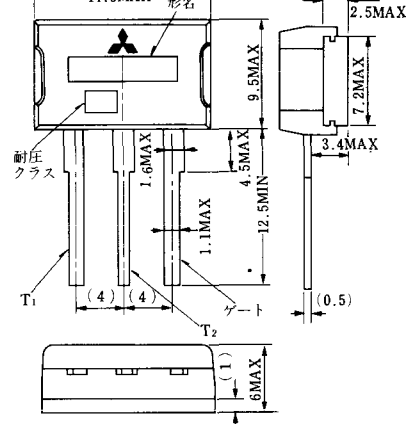


MT-5

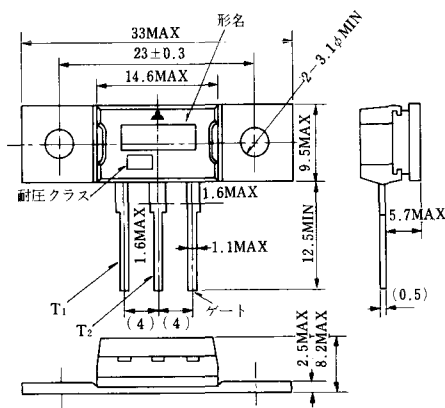


MT-6

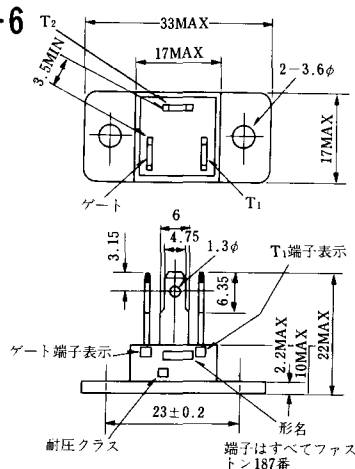


MT-7

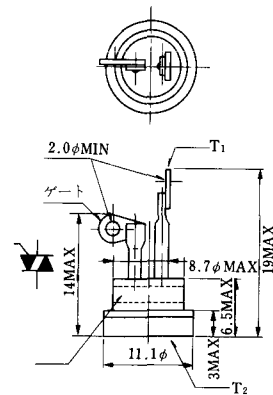


MT-8

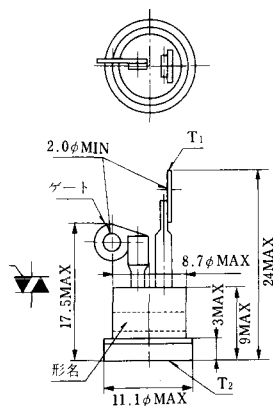


MT-9

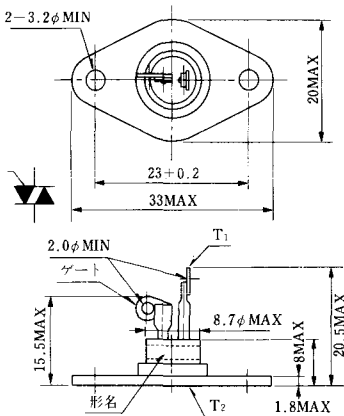


MT-10

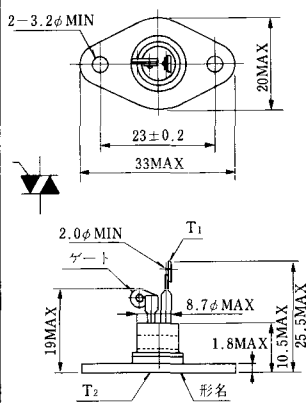


MT-11

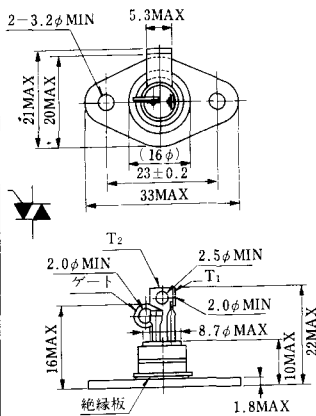


MT-12

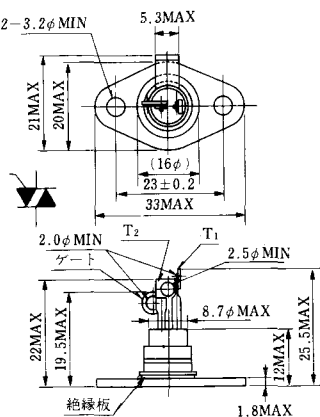


MT-13

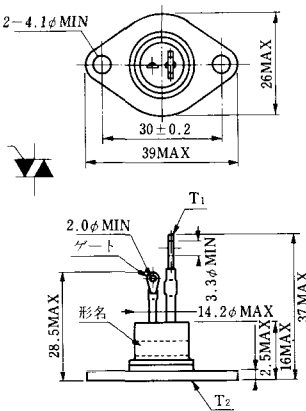


MT-14

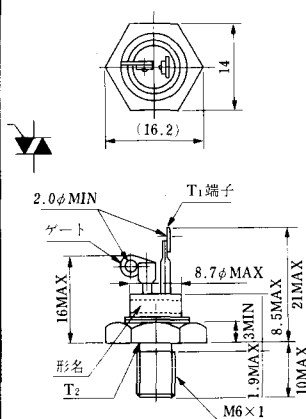


MT-15

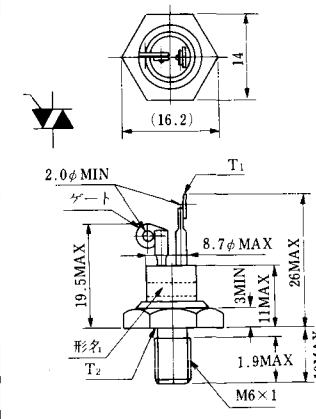


MT-16

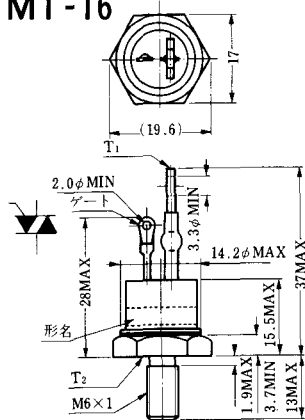


MT-17

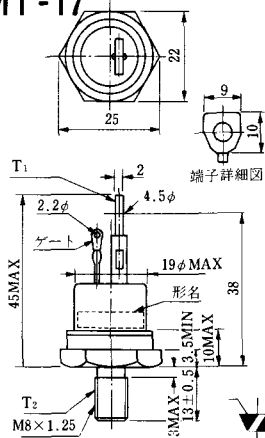


MT-18

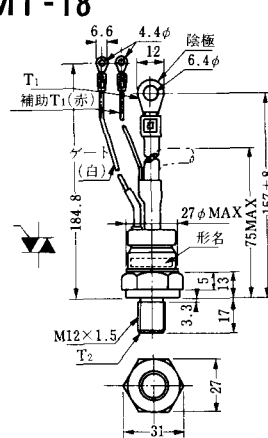


MT-19

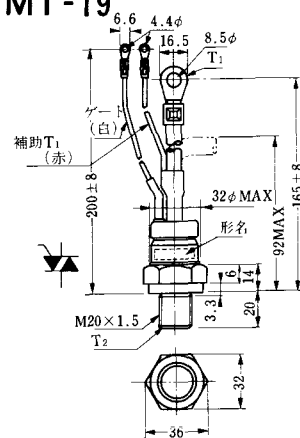


MT-20

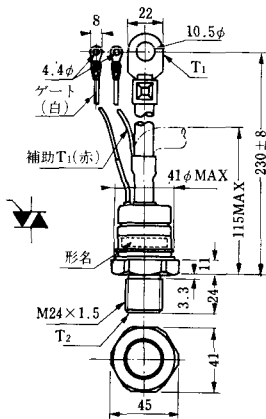


MT-21

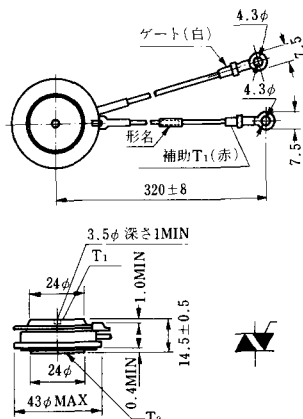


MT-22

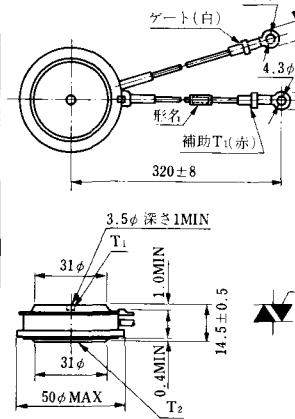

MT-23

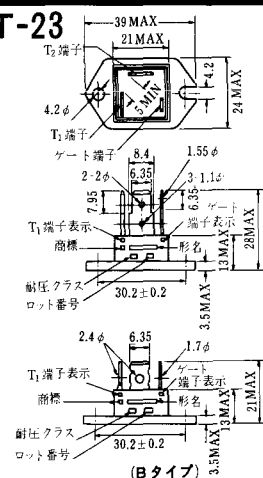


MT-24



TO-3P

- ① T1 端子
- ② T2 端子
- ③ ゲート 端子
- ④ T2 端子


N-1

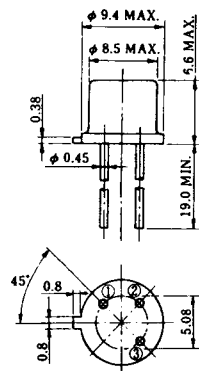

電極接続

- ① カソード
- ② ゲート
- ③ アノード


N-2



電極接続

- ① ヤート
- ② アノード
- ③ カソード


N-3

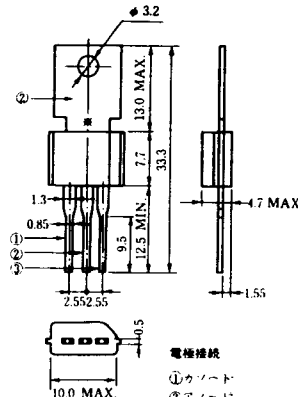

電極接続

- ① カソード
- ② アノード
- ③ ゲート


N-4

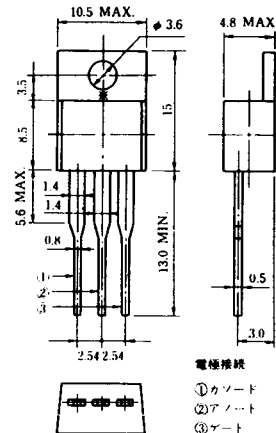


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5

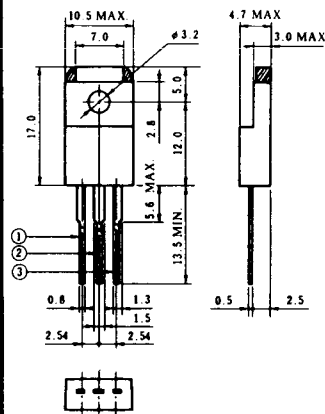


N-6

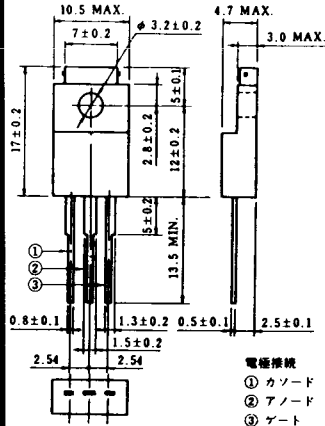


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

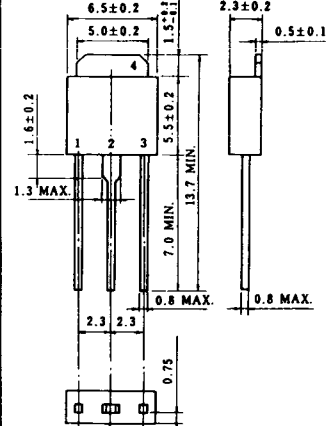


N-8

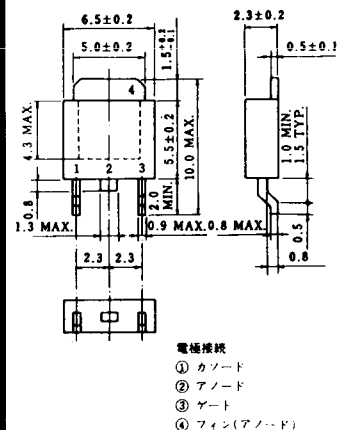

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9




電極接続

K : カソード

A : アノード

G : ゲート

NA-1

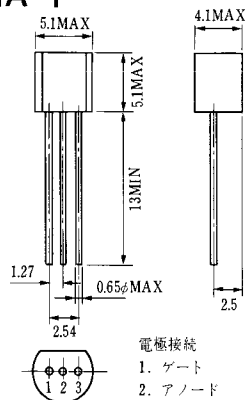


電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2

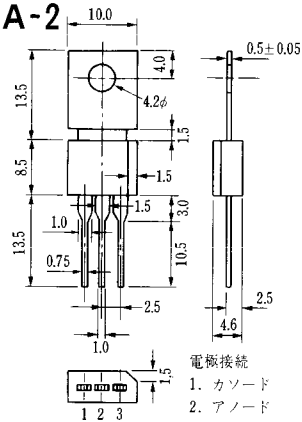


電極接続

1. カソード
2. アノード
3. ゲート


JEDEC: TO-202AA

NI-1

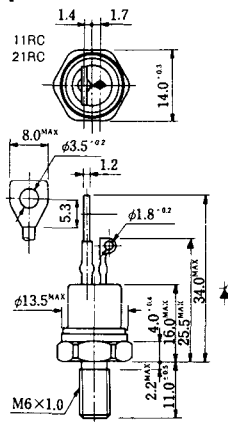


NI-2

29RD




NI-3

39RC
59RC
39RF
59RF

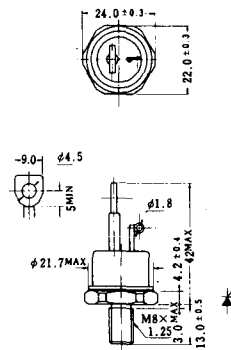


NI-4

68RP, 88RP, 108RP, 68RS,
88RS, 78RT, 88RLD, 88RLE,
88RLF, 88RLG, 88RLH, 108RLE




NI-5

158RP, 208RP, 128RS, 178RS,
158RT, 178RLD, 178RLE,
178RLF, 178RLG, 178RLH,
208RLE




NI-6

308RP, 408RP, 508RP, 278RS,
358RS, 258RT, 258RLD, 258RLG,
258RLH, 308RLE, 308RLF,
358RLE




NI-7

89RW $\frac{1}{2}$ L
129RW $\frac{1}{2}$ L

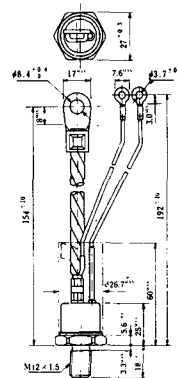


NI-8

89RW
129RW

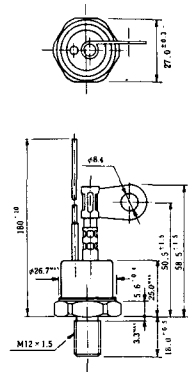


NI-9

259RW
309RW

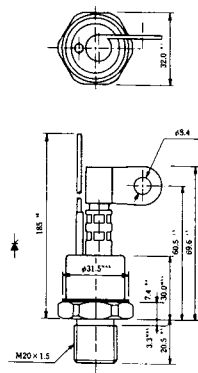


NI-10

259RW_JL
309RW_JL

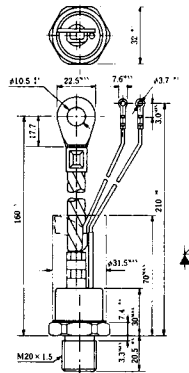

NI-11


103PA
253PA
503PA
553PA
803PA
103PLE
103PLG
103PLH
203PLG
253PLE
253PLH
353PLG
403PLE
403PLH



型名	103PA, 103PLE, 103PLG, 103PLH	253PA, 203PLG, 253PLE, 253PLH	503PA, 553PA, 353PLG, 403PLE, 403PLH	803PA
寸法				
A	40	46	55.5	55.5
B	16	22	30	32
C	36	42	50.5	50.5


NI-12

403PAB
503PAB
503PLB




NI-13

1003PA
1003PAB
1003PLF
1003PLH
1503PA




NI-14

358RGA




NI-15

359RGA




NI-16

503PLF
503PLH




NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA




NI-23

1201PGA「E



NI-24


2001PGB⁺ J E



NI-25


NI-26

NT-1




電線接続
① T₁
② ゲート
③ T₂

NT-2




電線接続
① T₁
② ゲート
③ T₂

NT-3

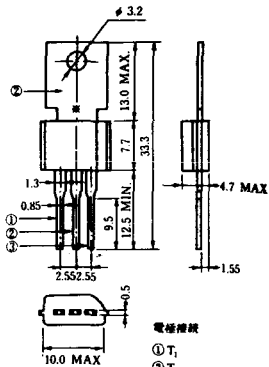


電線接続
① T₁
② T₂
③ ゲート

NT-4

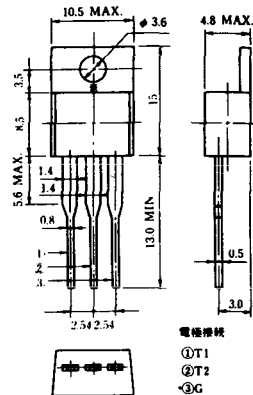


電線接続
① T₁
② T₂
③ G

NT-5

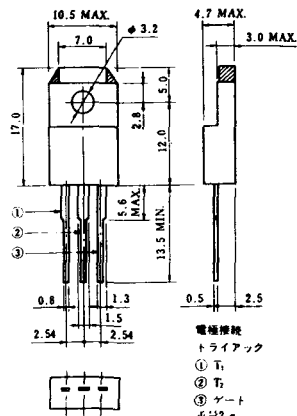


電線接続
トライアック
① T₁
② T₂
③ ゲート
④ 2K

NT-6

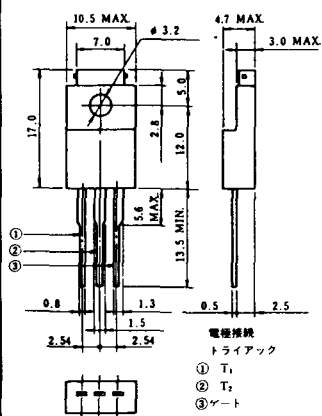


電線接続
トライアック
① T₁
② T₂
③ ゲート
④ 2K

NT-7

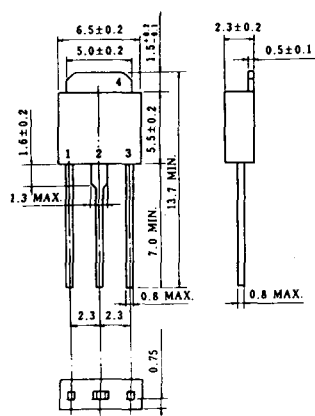


NT-8

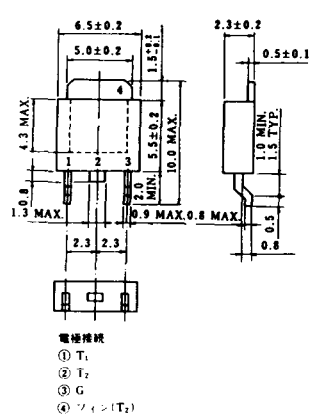


電線接続
① T₁
② T₂
③ G
④ ツイン(T₂)


S-1

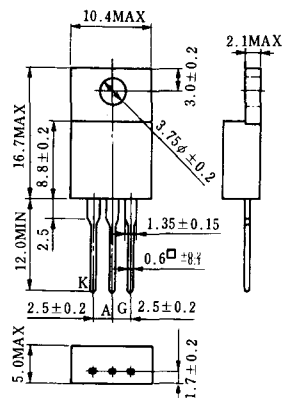


ST-1

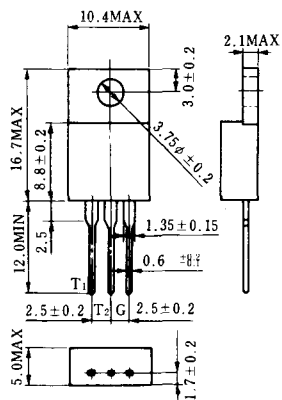


SA-1

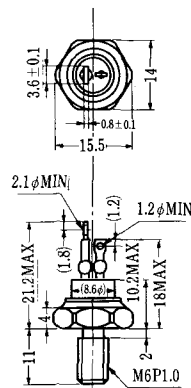


SA-2

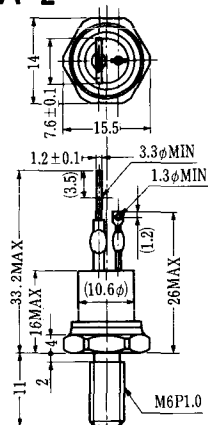


SA-3

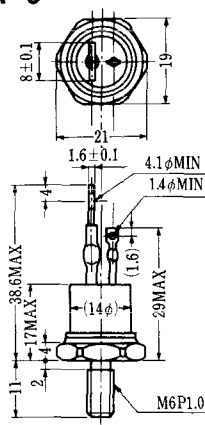


SA-4

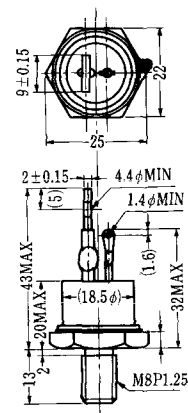


SA-5

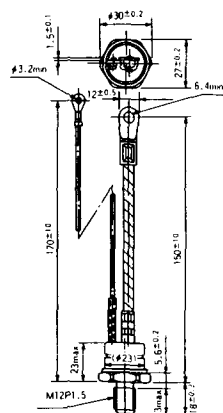


SA-6

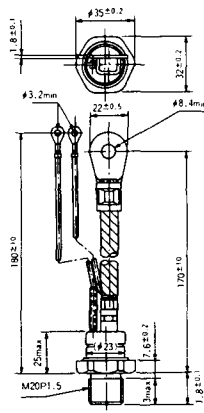


SA-7

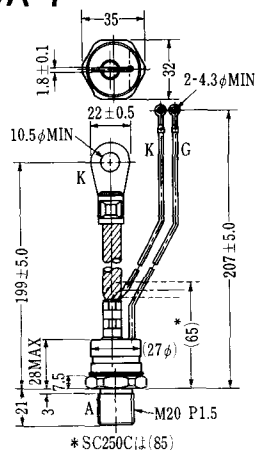


SA-8

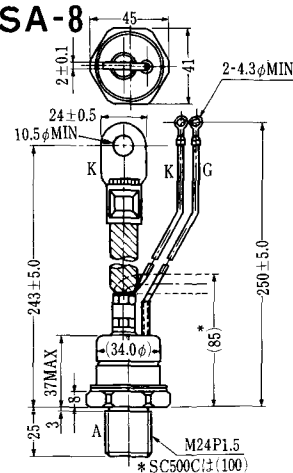


SA-9

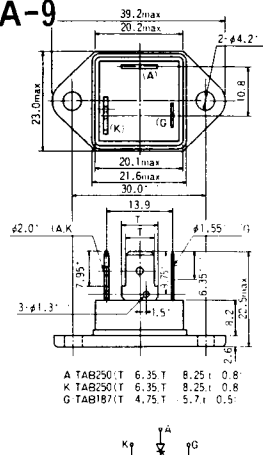


SA-10

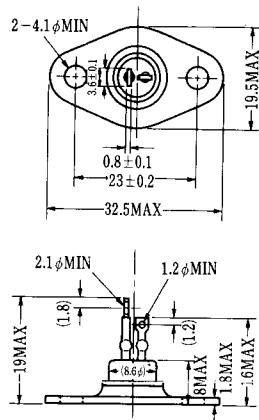


SA-11

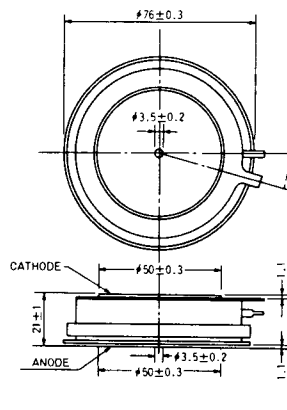

SA-12

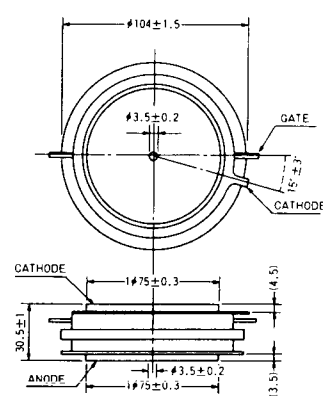


SAT-1

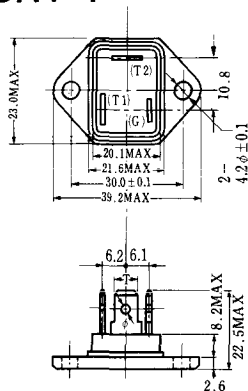


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)


SAT-2

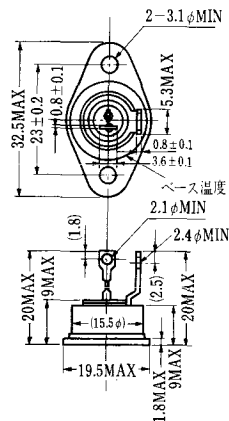


SAT-3

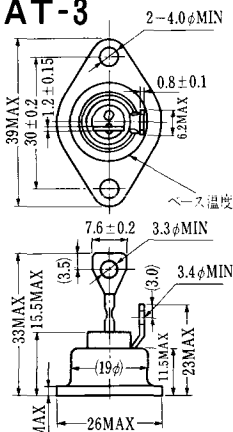


SAT-4

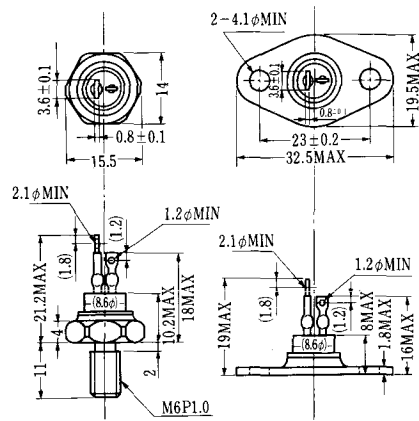


SAT-5

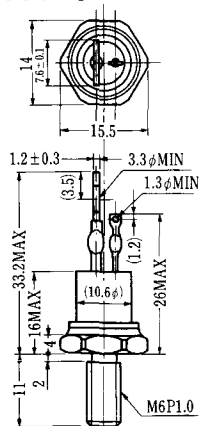


SAT-6

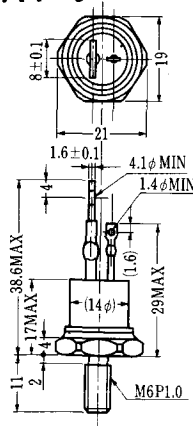


SAT-7

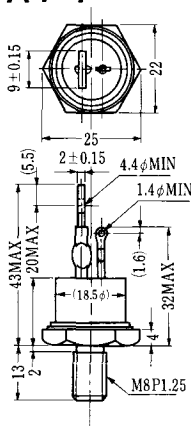


SAT-8

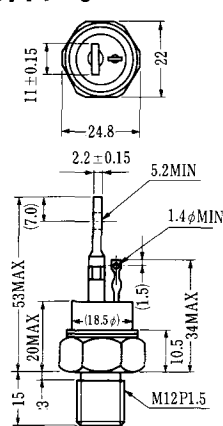


SAT-9

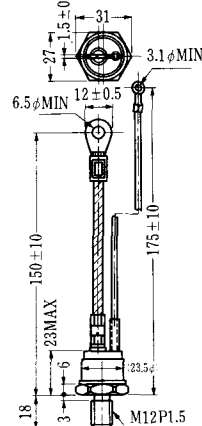


SAT-10

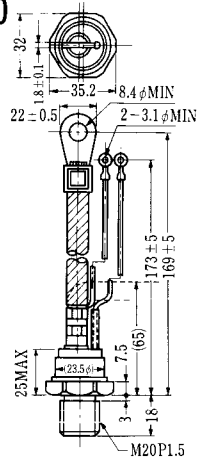


SAT-11

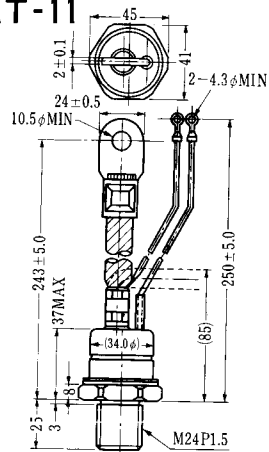


SY-1(1096A)




SY-2(1151)

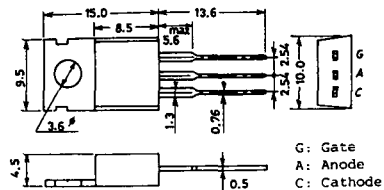


SY-3(1104)



SY-4(1150)

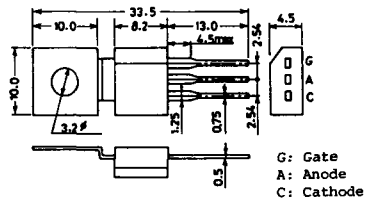


1097A




G: Gate


1102




1141




1142




1144

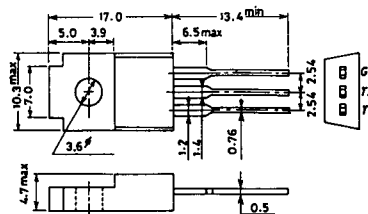

1155

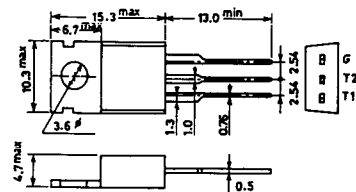


1192A




G: Gate


T-1 (13-5A1A)

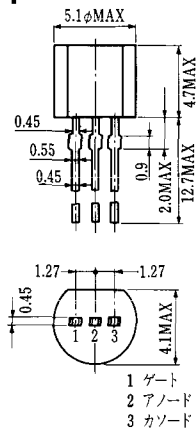


T-2 (13-8A1A)

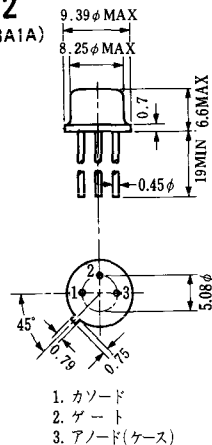


T-3 (13-8C1A)

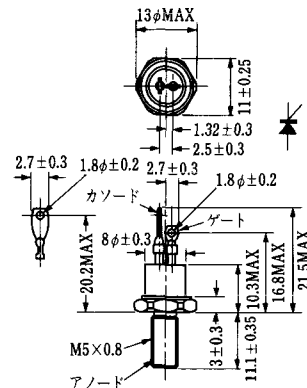


T-4 (13-10A1A)

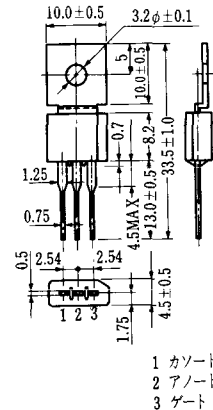


T-5 (13-10B1A)

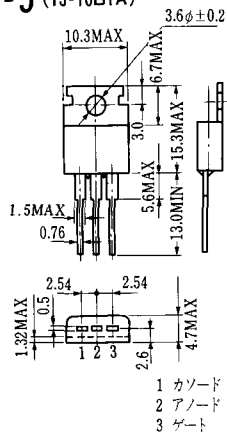


T-6 (13-11D1A)

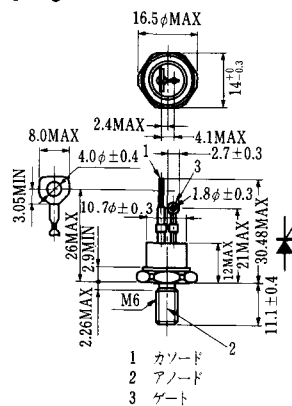


T-7 (13-13A1A)

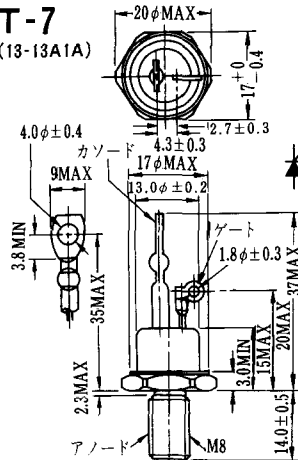


T-8 (13-13B1A)

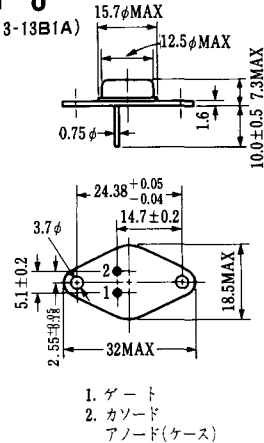


T-17 (13-42A1A)

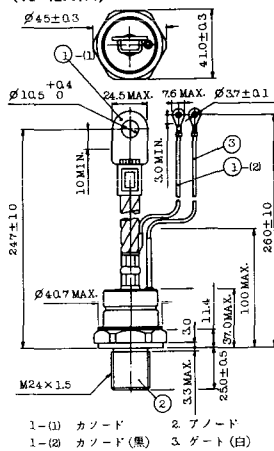


T-18 (13-45D1A)

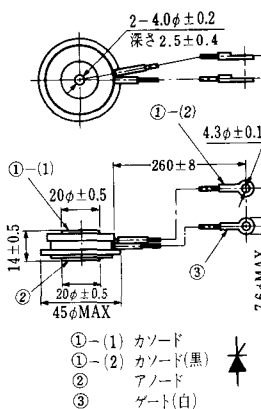


T-19 (13-52B1A)

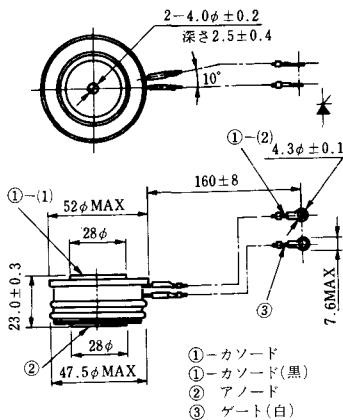


T-20 (13-52C1A)

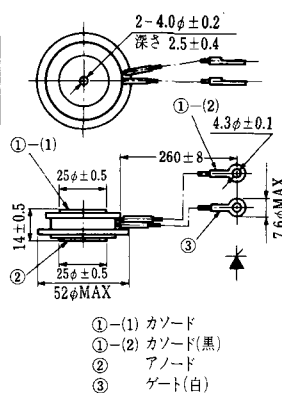


T-21 (13-60A1A)

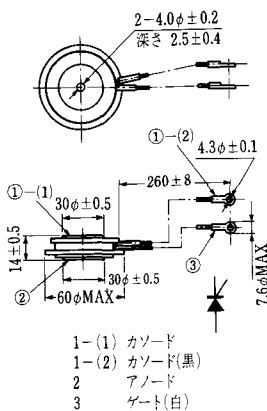


T-22 (13-70C1A)

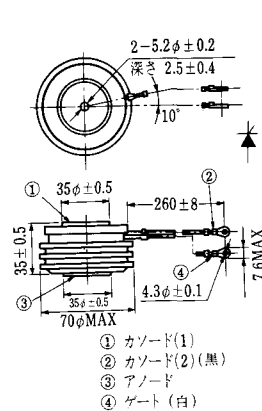


T-23 (13-78A1A)

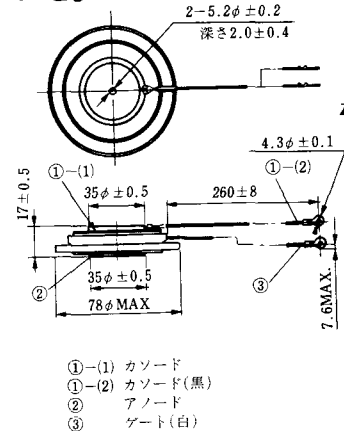


T-24 (13-100C1A)

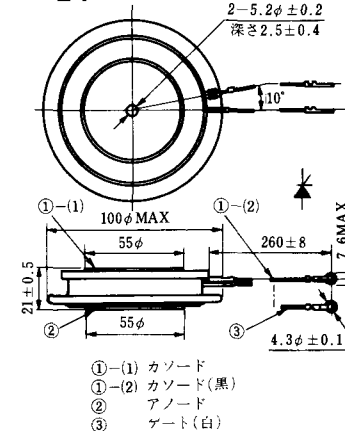


T-25 (13-120A2A)

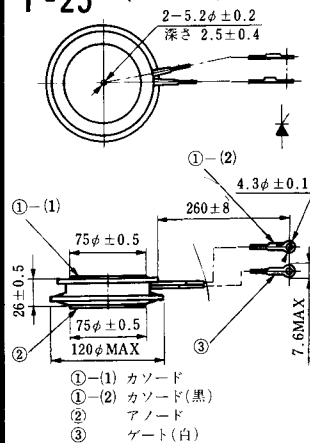


T-26 (13-150A1A)

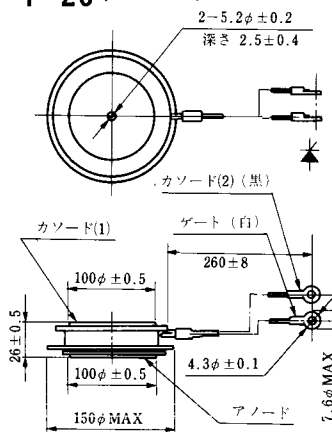


T-27 (13-37A1A)

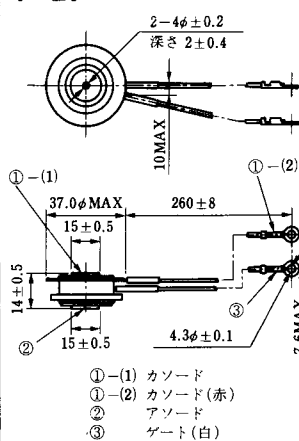


T-28 (13-45E1A)

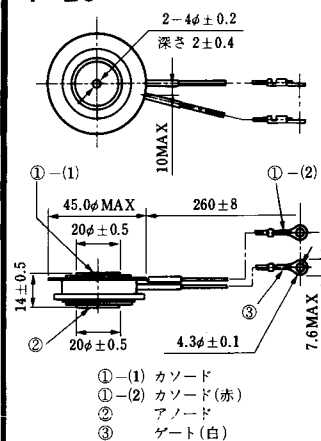


T-29 (13-51A1A)

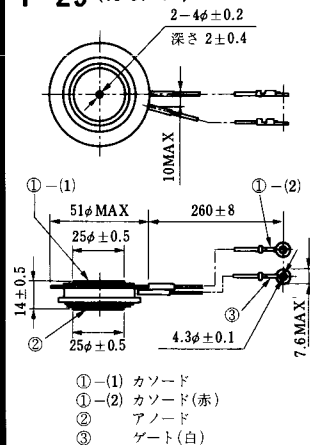


T-30 (13-57A1A)

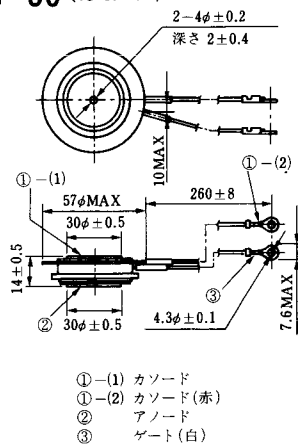


T-31 (13-100E1A)

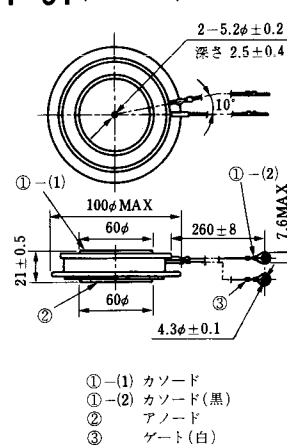

T-32 (13-60E3A)

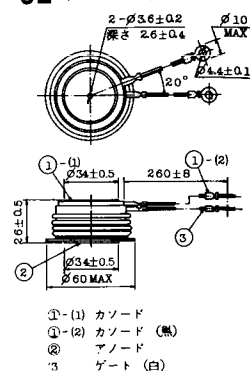


T-33 (13-78B1A)




- ① カソード
② アノード
③ ゲート

T-34 (13-66A1A)

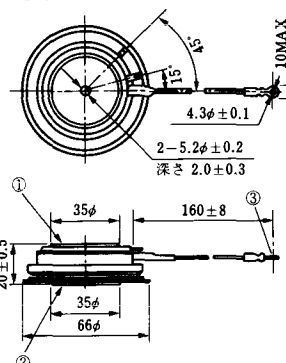


- ① カソード
② アノード
③ ゲート

T-35 (13-100D1A)

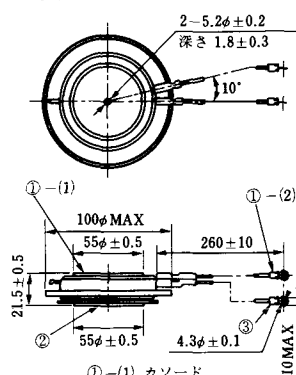


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-36 (13-120E1A)

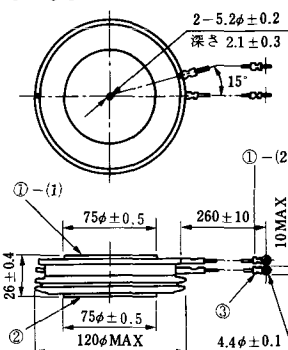


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-37 (13-120A1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-38 (13-120C1A)




- ① カソード
② アノード
③ ゲート

T-39 (13-80B1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-40 (13-28A1A)

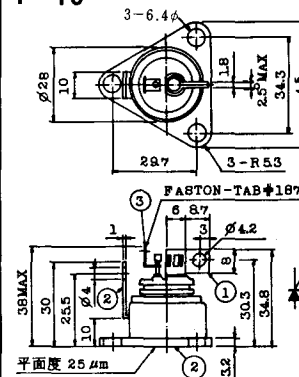


1. カソード
2. アノード
3. ゲート


T-41 (13-28A2A)

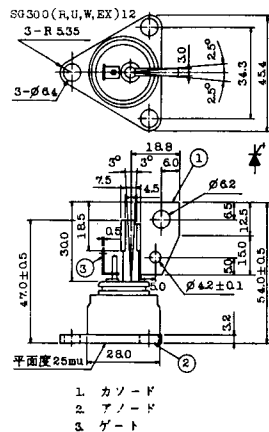


T-42 (13-45F1A)

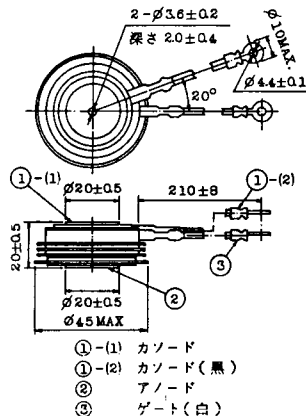


T-43 (13-60E2A)

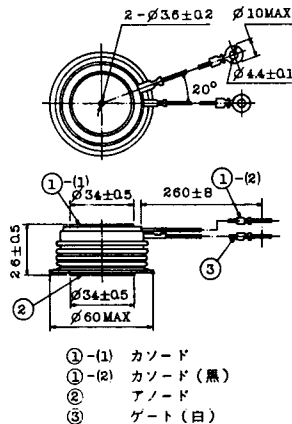


T-44 (13-36A1A)

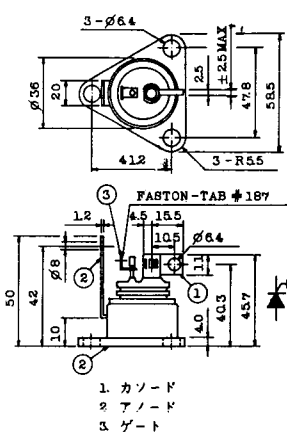


T-45 (13-51B1A)

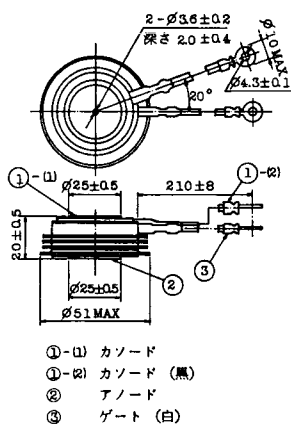


T-46 (13-36B1A)

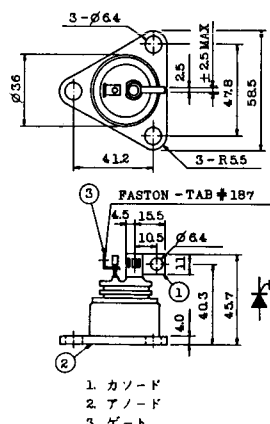


T-47 (13-60E1A)

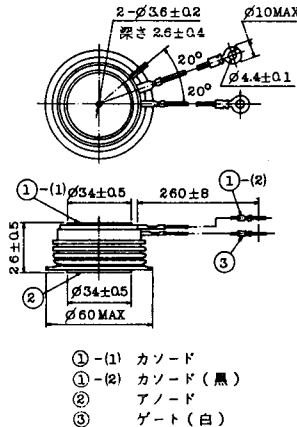


T-48 (13-93C1A)

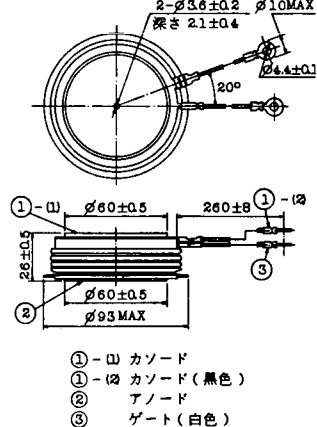


T-49 (13-75A1A)

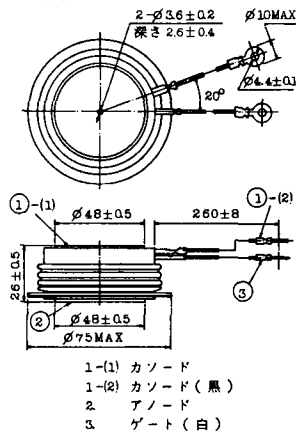


T-50 (13-10A3A)

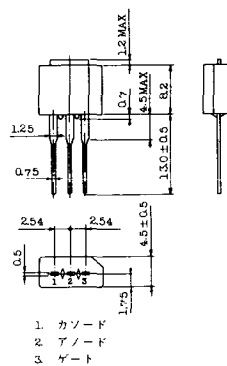


T-51 (13-10D1A)

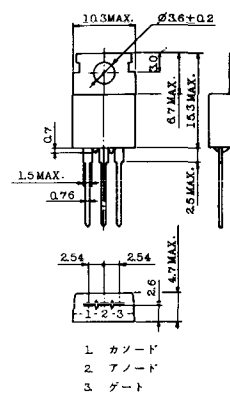


T-52 (13-10D2A)

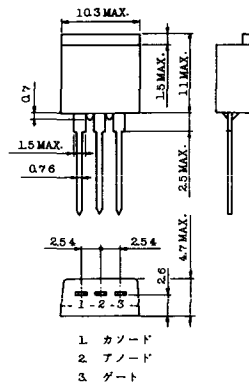


T-53 (13-10E1B)

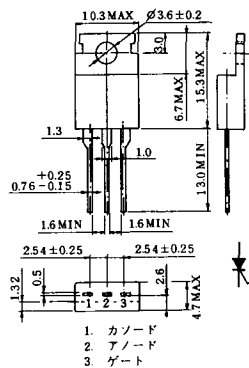


T-54 (13-10F1B)

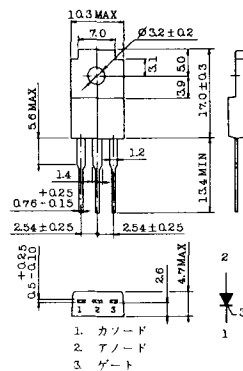


T-55 (13-5A1D)

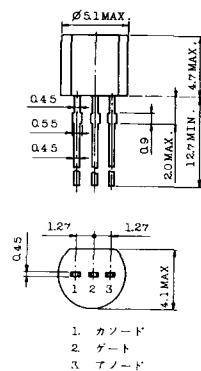


T-56 (13-13C1A)

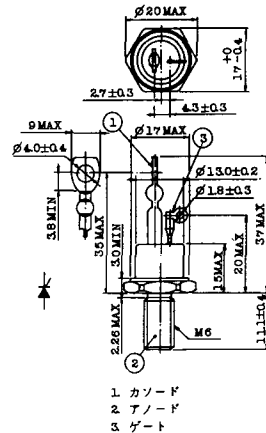


TT-1

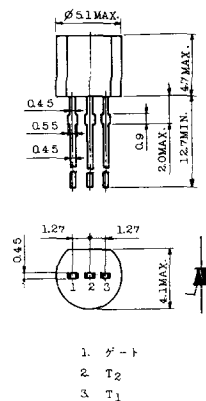


TT-2

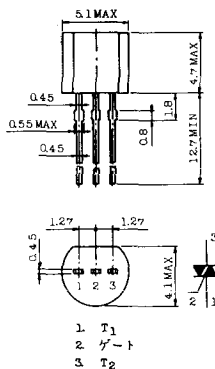


TT-3

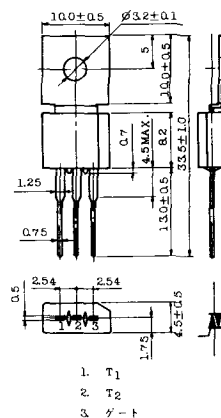


TT-4

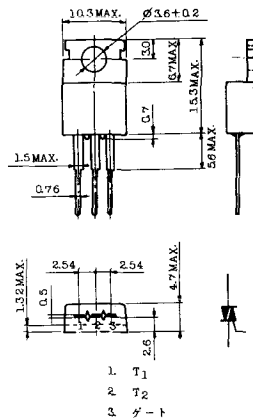


TT-5

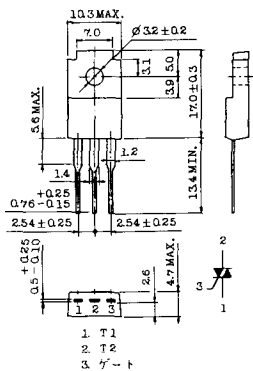


TT-6

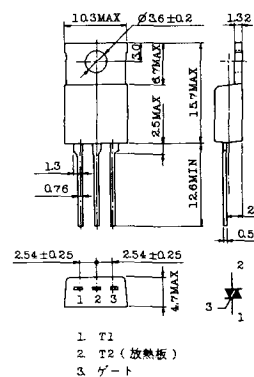


TT-7

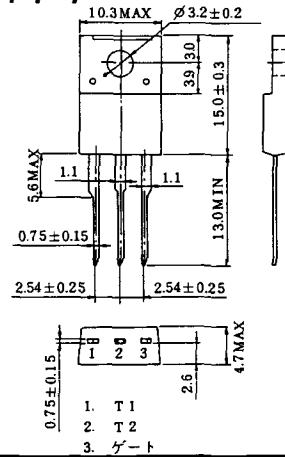

TT-8

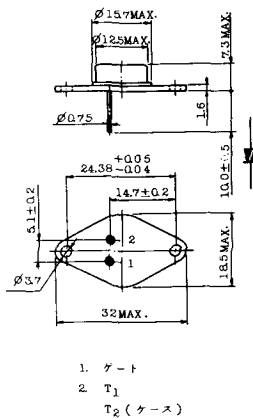


TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10




1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

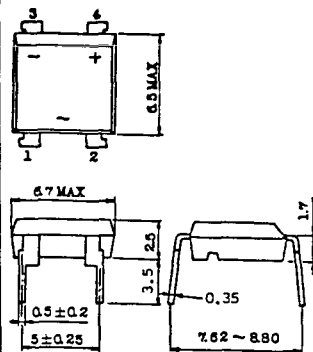


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

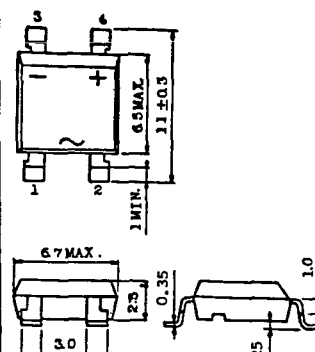


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)

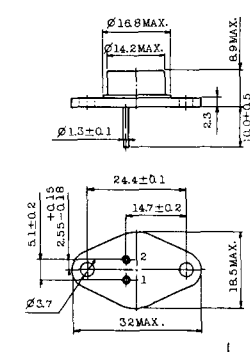


1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)

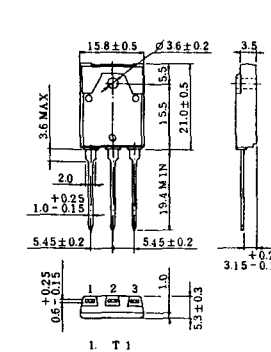


1. T₁
2. T₂
3. ゲート


TS-1

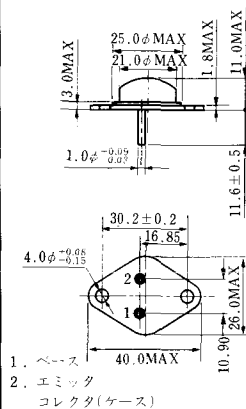


TS-2

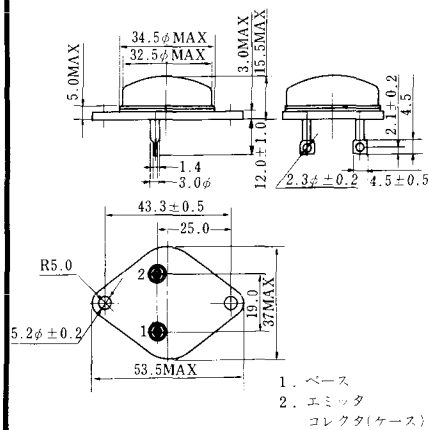


TS-3

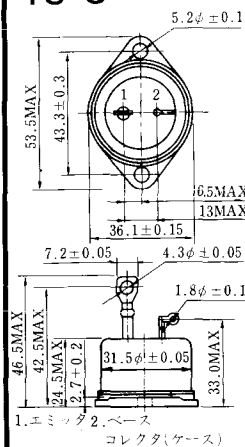


TS-4

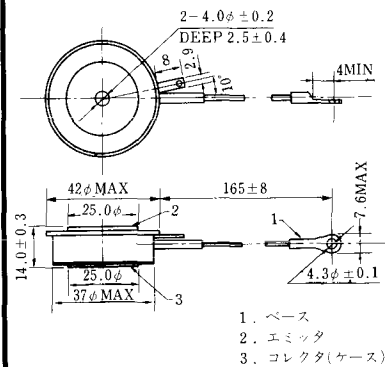


TS-5





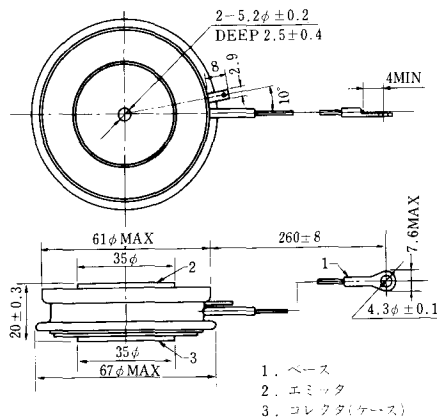


TS-6

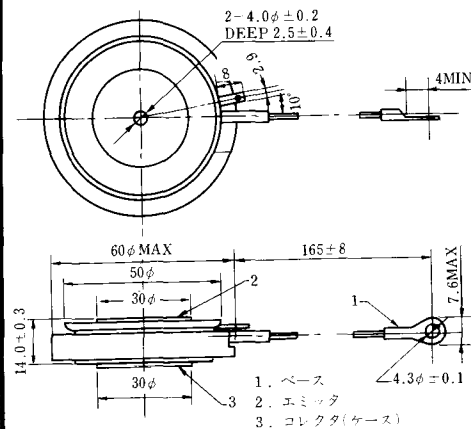


TS-7

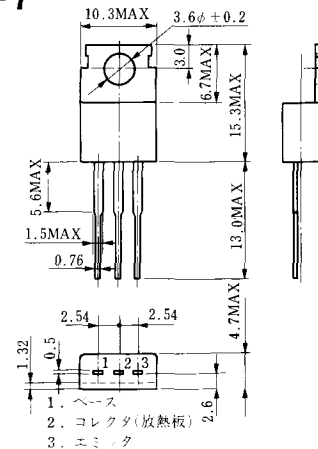





S-94B2A

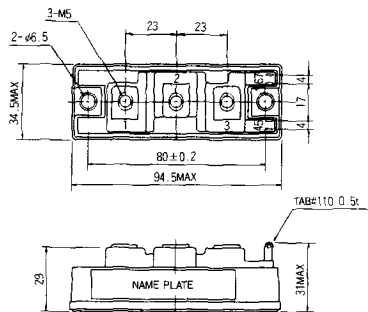


S-94D1A

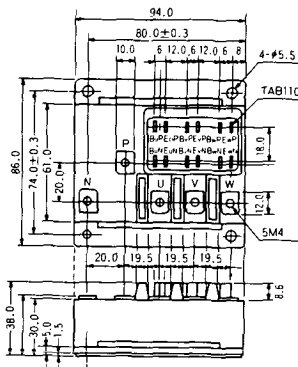


S-95A1A




S-95B1A

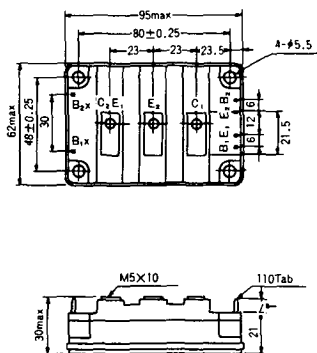


S-98B1B

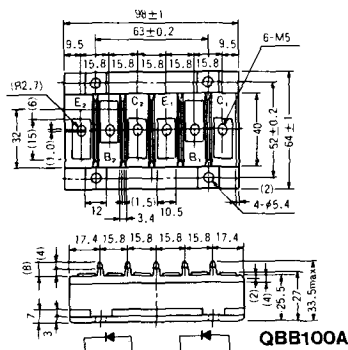


S-108A2A




S-108B1A

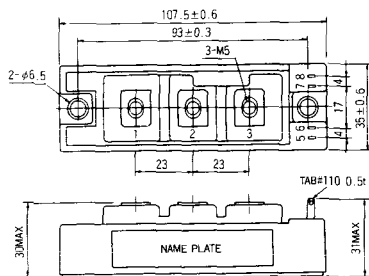


S-108B1B




S-108B1C

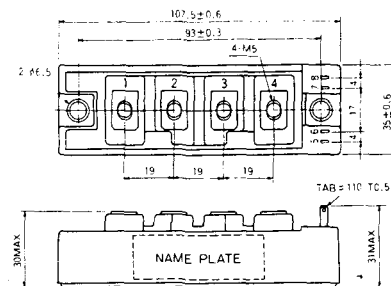


S-108B2A

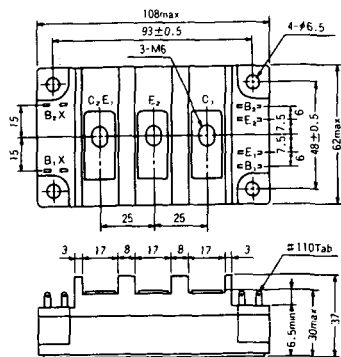


S-108B2B

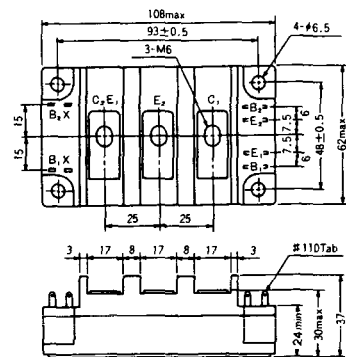


2-22B1A

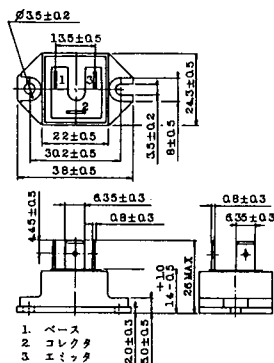


2-27A4A




2-33C1A

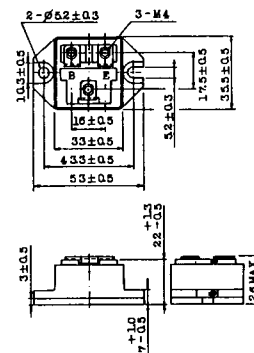


2-33D1A




2-33F1A

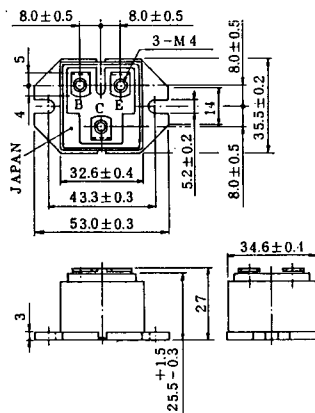


2-37A1A

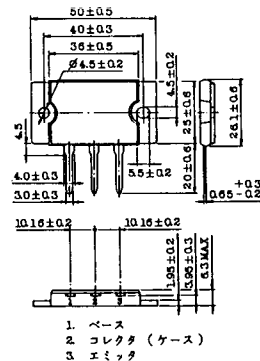


2-48A3A




2-48A3B




2-48A4A




2-64A2A

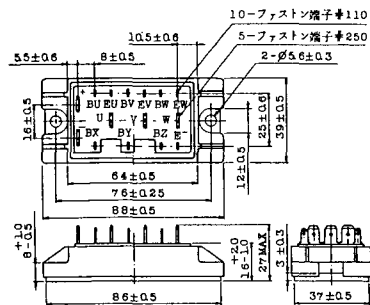


2-64A2B

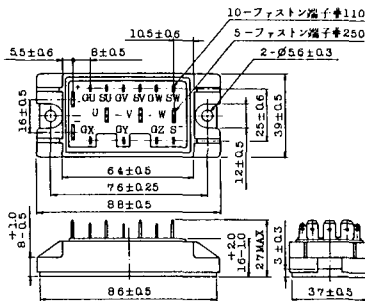


2-68A2A

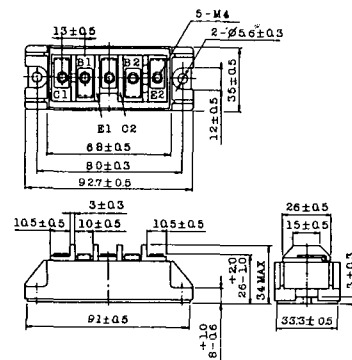


2-80C1A

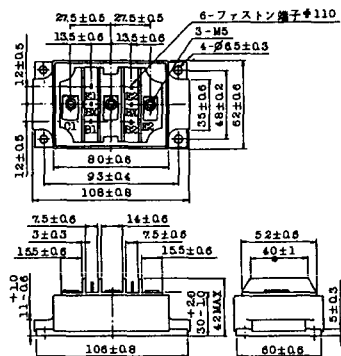


2-80D2A

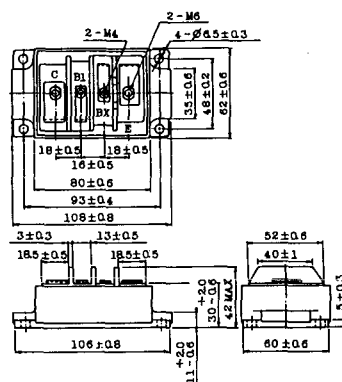


2-94A2A

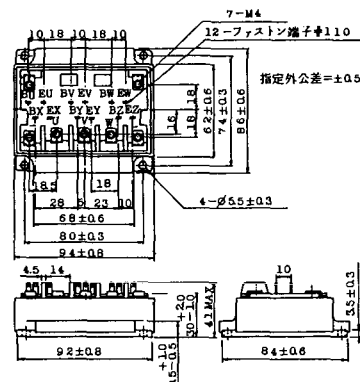


2-94B1A




2-94C2A




2-94C3A

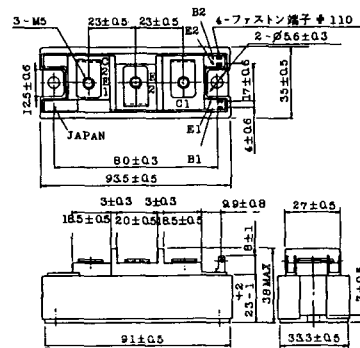


2-108B1A

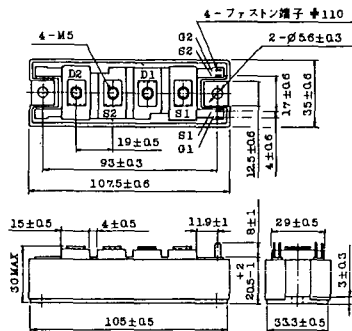


2-109A3A

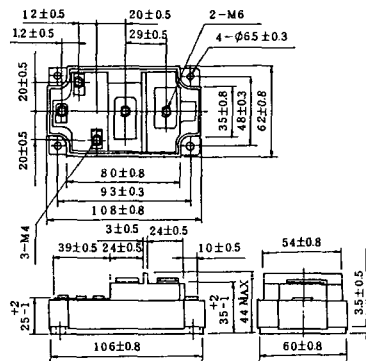


2-109A4A

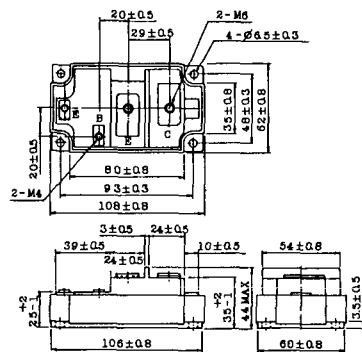

2-109B3A

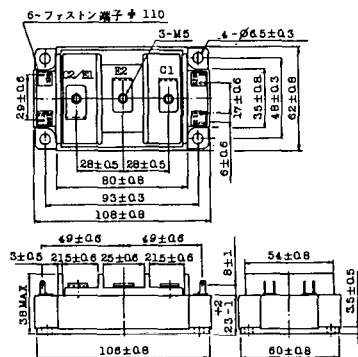


2-109B4A

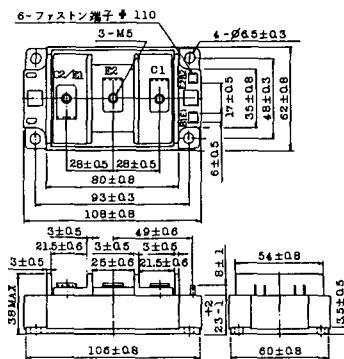


BBT-II

BBTII
1D200A-020




BBT-III

BBTIII
ETN31-055
ETN36-030
ETN36-030
ETN35-030

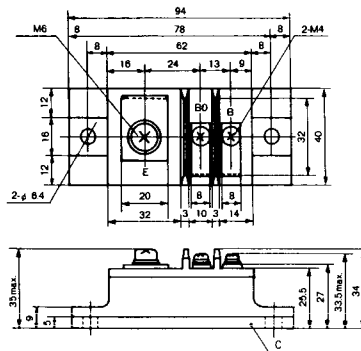


BBT-III

BBTIII
ETN01-055
ET1257

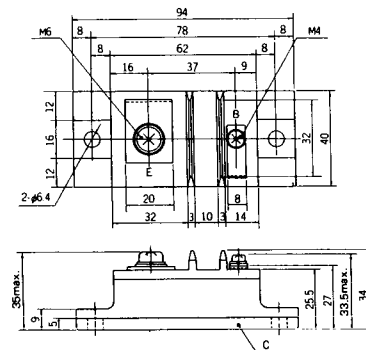


BBT-IV


BBTIV
1D500A-030

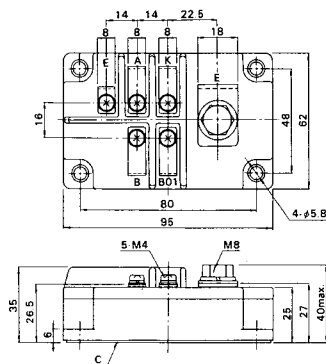


M-101




M-102




M-103




M-104

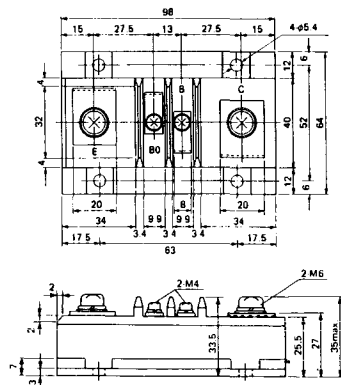


M-105




M-106

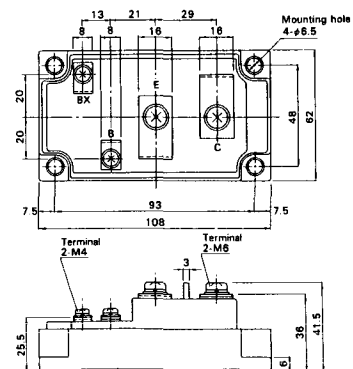


M-107

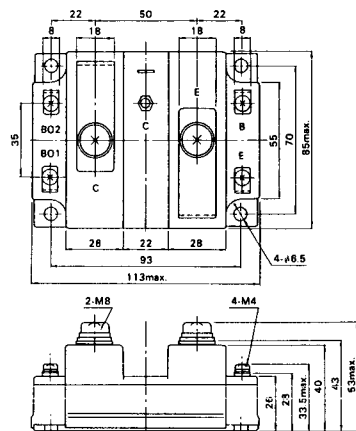


M-116




M-201




M-202

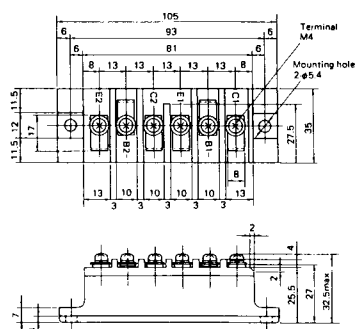


M-203

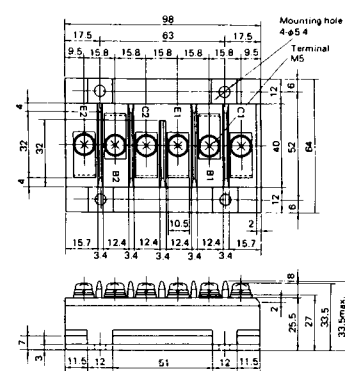


M-204

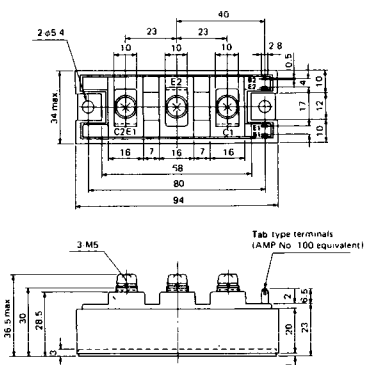


M-205

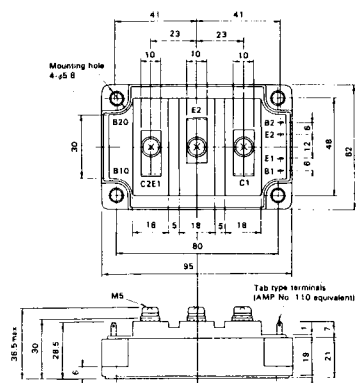


M-206

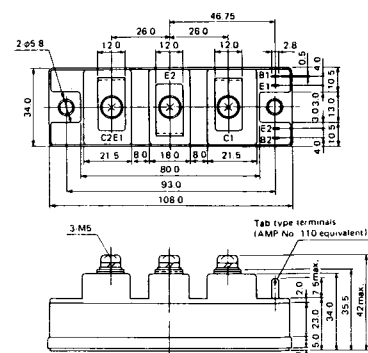


M-207

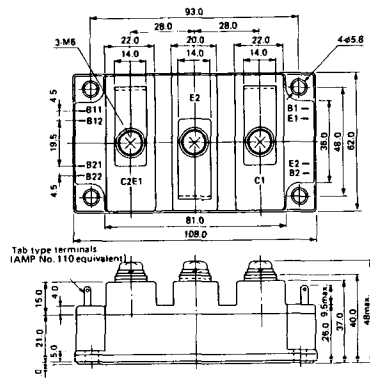


M-208

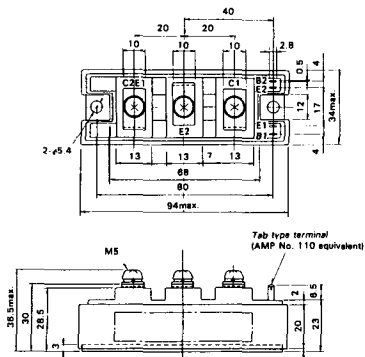


M-209

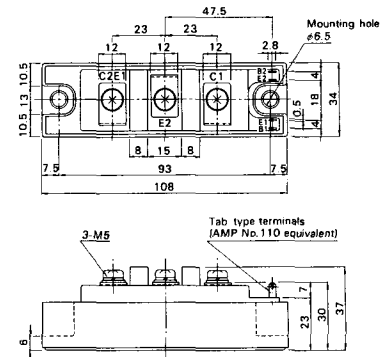


M-210

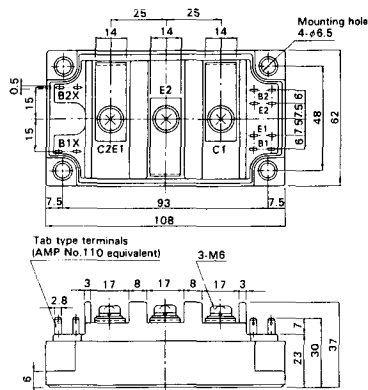


M-211



M-212




M-213




M-214


M-215




M-216




M-217




M-218




M-601

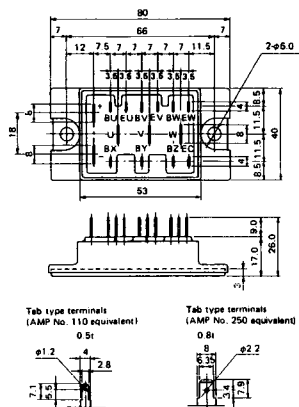


M-602

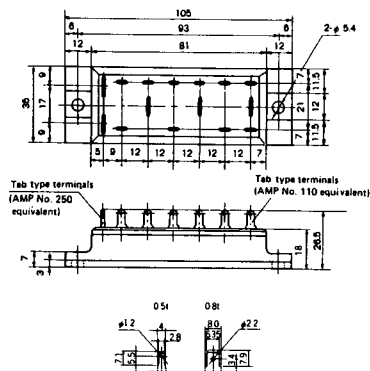


M-603

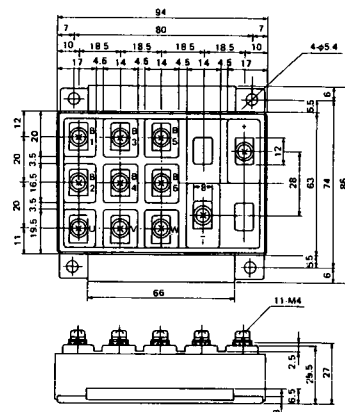


M-604




M-605

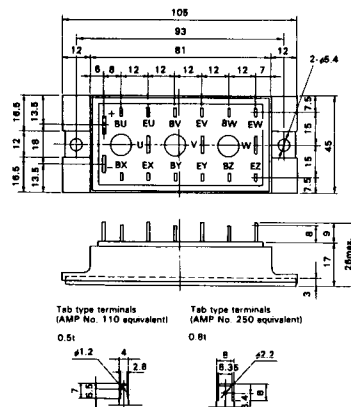


M-606




M-607




M-608




M-609




M-610




M-616




M-1A1A




M-2A1A




M-2B1A




M-2B2A




M-2C2A




M-2D4A

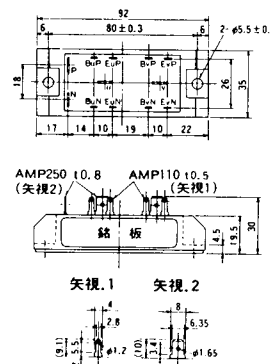


M-2E6A

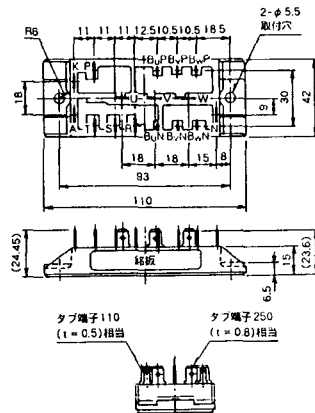


M-2F6A




M-2G6A

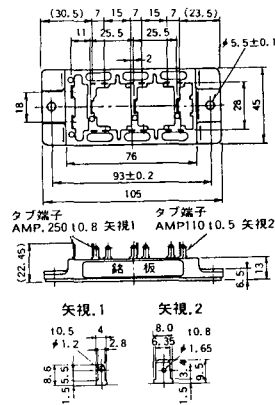


M-3A1A




M-3B1A




M-3B1B

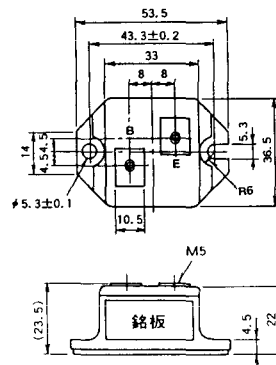


M-3C1A

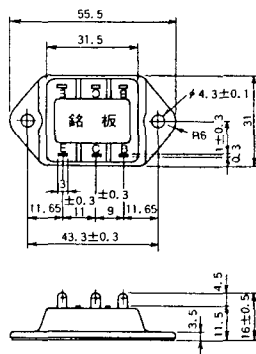


M-3D6A

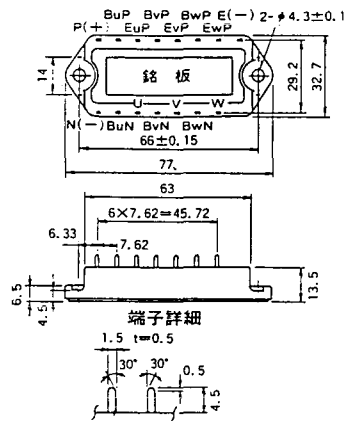


M-3E6A

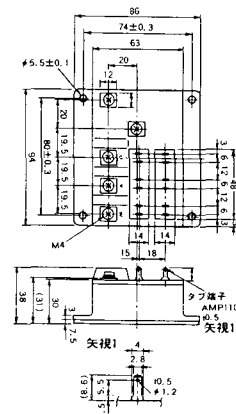


M-4A1A




M-4A2A




M-4A1B




M-4A2B




M-4B2A




M-5A1A




M-5A1B




M-5A2A




M-5B2A




M-5C2A




M-5D2A




M-6A1A

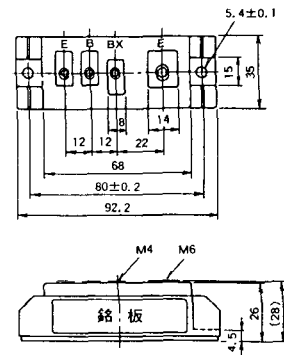


M-7A1A

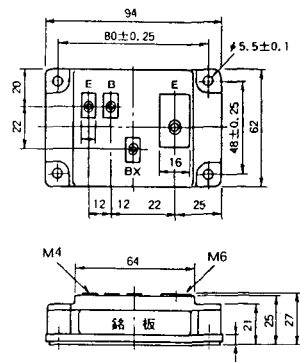


M-7B1A




M-8A1A




M-8A1B




M-8A2A




M-8A2B




M-8B2A

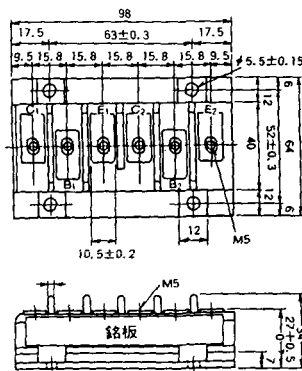


M-9A1A




M-9A2A




M-9B1A




M-9C2A




M-1A1B

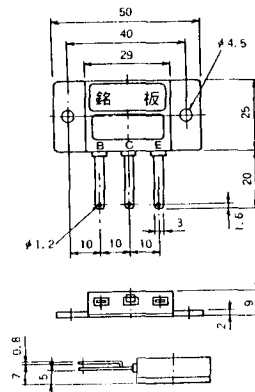


M-1A1C




M-2E6B

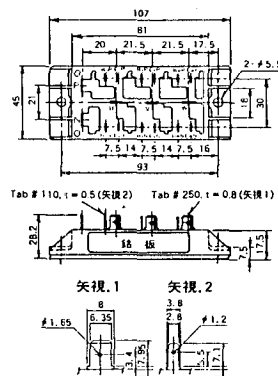


M-2E6C




M-10A2A




M-10A2B




M-11A2A

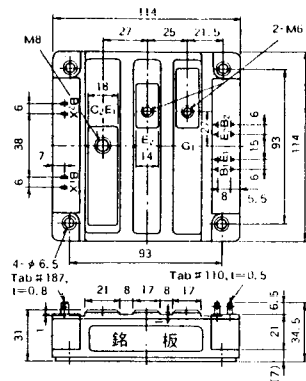


M-12A6A

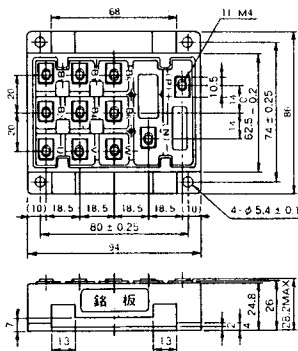


M-12B6A




M-12B6B

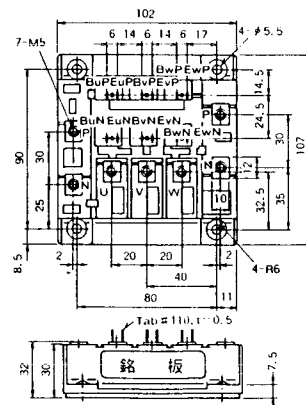


M-4A2D

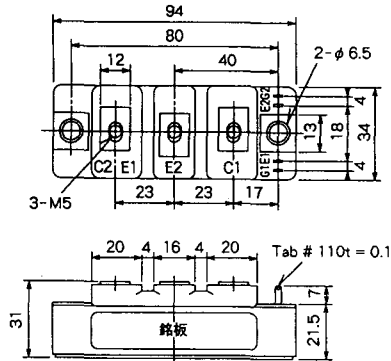


M-4A2E

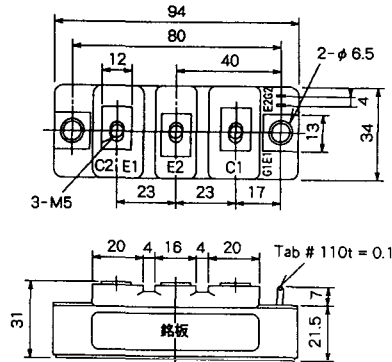


M-4C2A

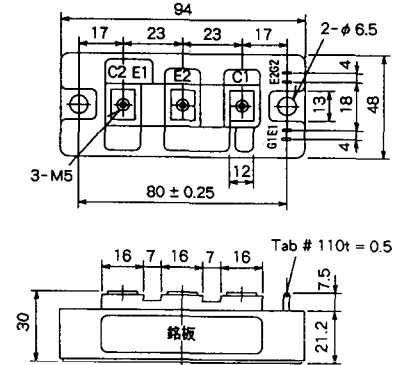


M-4C2B

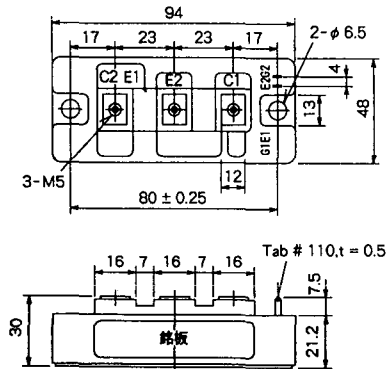


M-9B1C

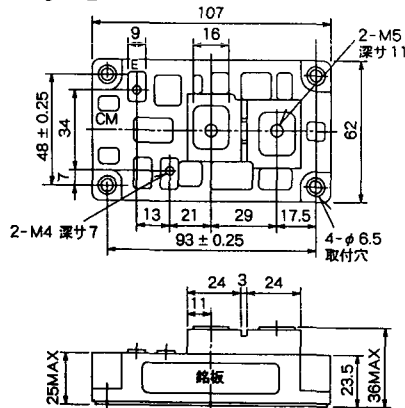


M-9D2A

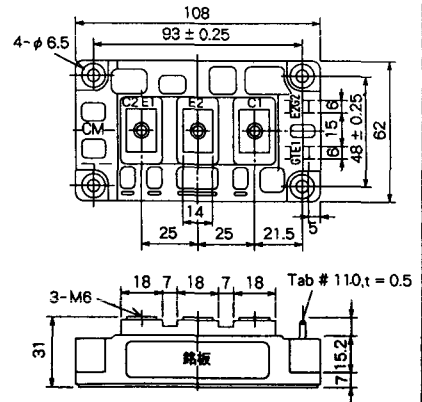




M-9D2B

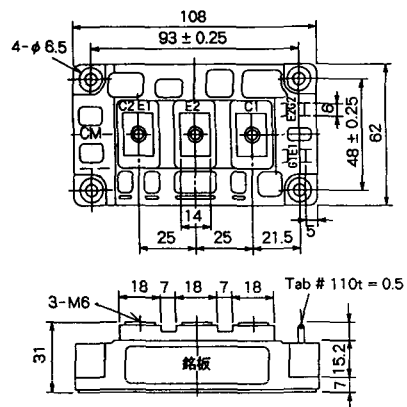

M-10A2C

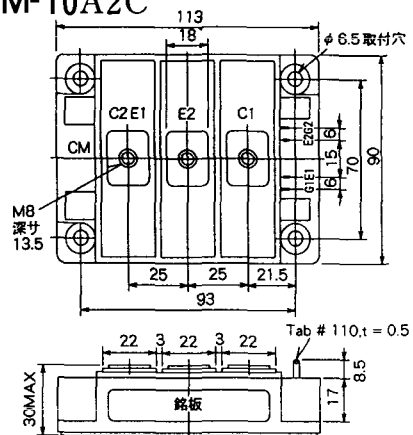


H-101

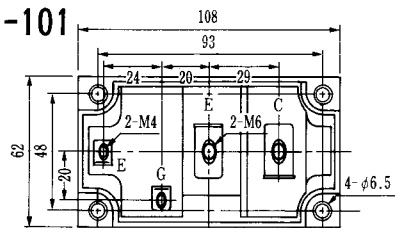


Weight :480g

TERMINALS



H-201

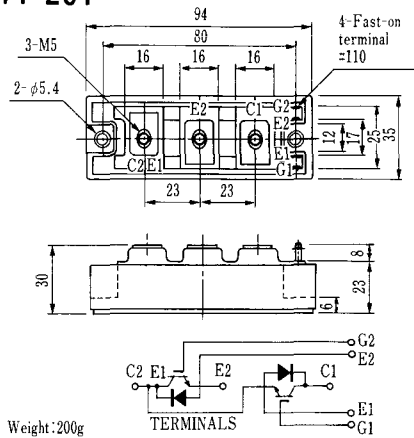



H-202

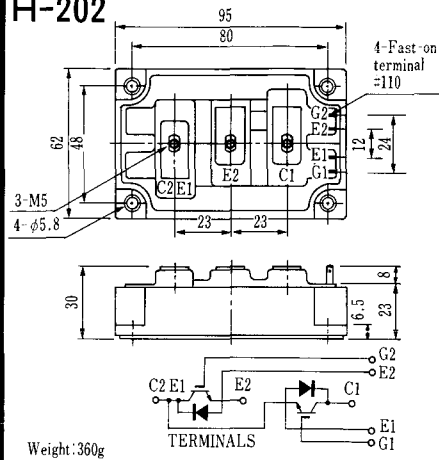


LF-J

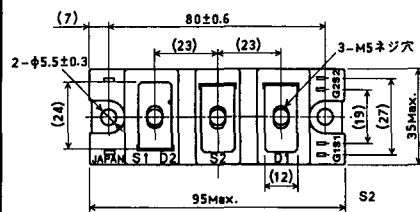


LF-K

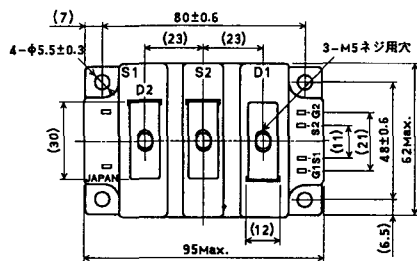


U-1

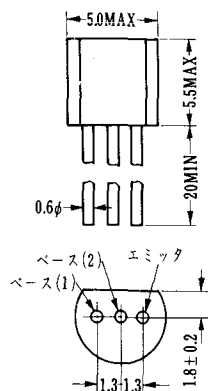


U-2

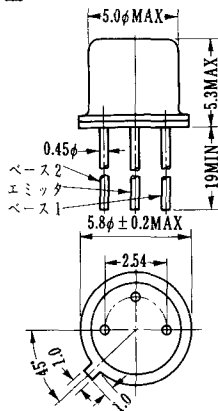


U-3

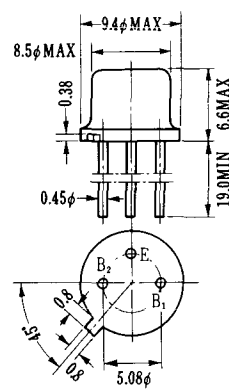

U-4

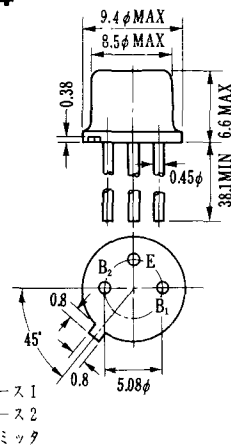


U-5

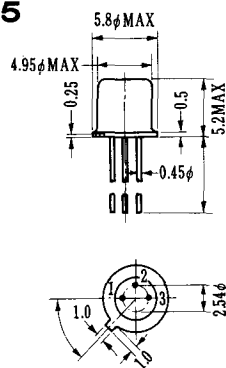


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

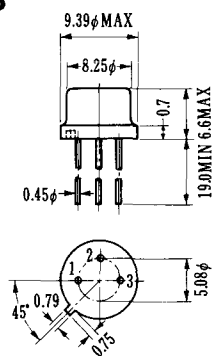

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

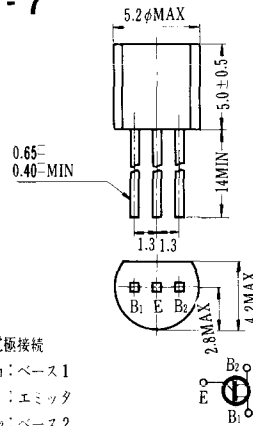

U-8

