

Matching MOSFET Drivers to MOSFETs

INTRODUCTION

Microchip offers many sizes of MOSFET drivers. This allows the designer to best match the switching performance of the driver/MOSFET to the application.

MOSFET DIE SIZES

Unlike bipolar transistors in which die size is primarily a function of current, MOSFETs have die sizes that are a function of both current and voltage.

DIE SIZE EFFECT ON GATE CAPACITANCE

As can be expected, the larger the die size, the larger the effective gate capacitance. As an illustration of this, look through any manufacturer's databook and relate die size to C_{GS} and C_{RSS} and you will find that die size determines both these parameters, not the voltage or current rating of the device.

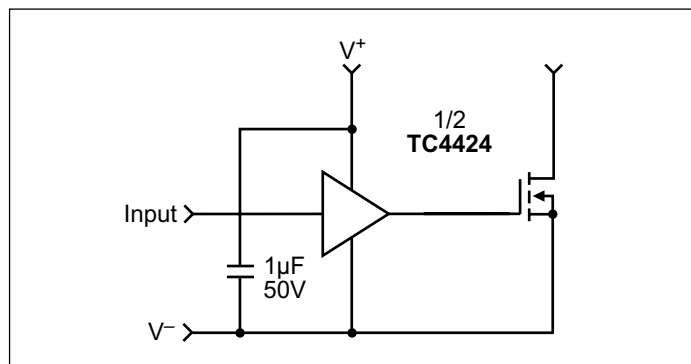


FIGURE 1: Typical drive circuit.

The industry has, in general, adopted International Rectifier's die size description technique. Instead of referring to "mils on a side" to describe the die size, they have used simple numeric indicators 0 through 6. Thus, a Hex 0 is the smallest die, while a Hex 6 is the largest in standard MOSFET offerings. Some other manufacturers (IXYS) are offering sizes as large as Hex 9. Parallel-MOSFET modules can be even larger.

PEAK CURRENT REQUIREMENTS

One can now view the driving function in terms of the peak current required to obtain the required rise time for any application (in view of the capacitance thus die size). From $[(dV) \times C]/I = dT$ we can determine the trade-offs in any driving circuit. The optimum rise time in any application is based on many requirements, such as EMI, heat dissipation, lead/circuit inductance, etc. Thus, there can be no universal driver that fits all applications.

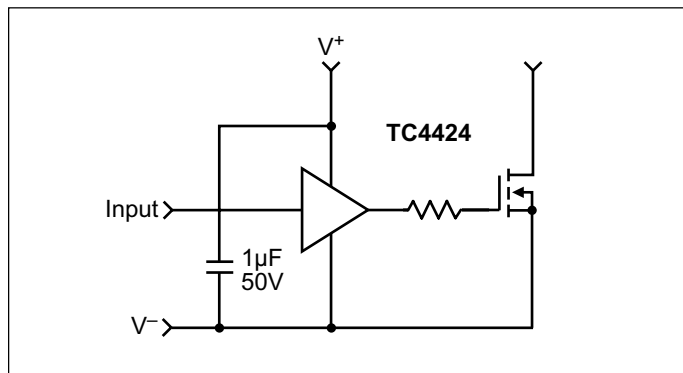


FIGURE 2: Use of a resistor to limit peak control.

DRIVER FAMILIES

There are several families of Microchip MOSFET drivers. They are:

- TC426-29
- TC1410-13
- TC1426-28
- TC4403-05
- TC4420-29
- TC4431/32
- TC4467-69
- TC4626/27

The TC426 was the world's first CMOS MOSFET driver. It was a dual output device capable of up to 1.5A at 18V. It came in two other versions, the dual non-inverting TC427 driver, and one inverting plus one non-inverting in the TC428 driver.

The TC4426 family is the second generation of the 426 family, but through improved processing and design has less propagation delay, and draws half the power of the first generation. These improvements have been incorporated into all drivers with four numeric digits in the part number.

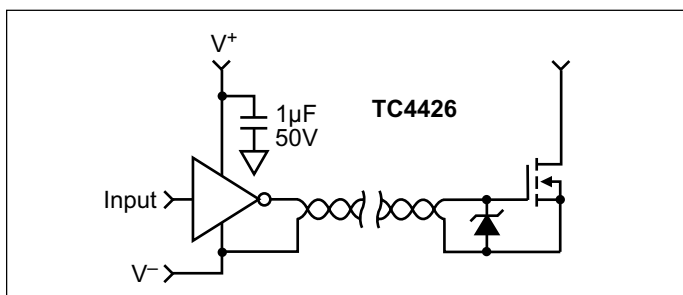


FIGURE 3: Use of zener diode to clamp voltage on long output lines.

AN30

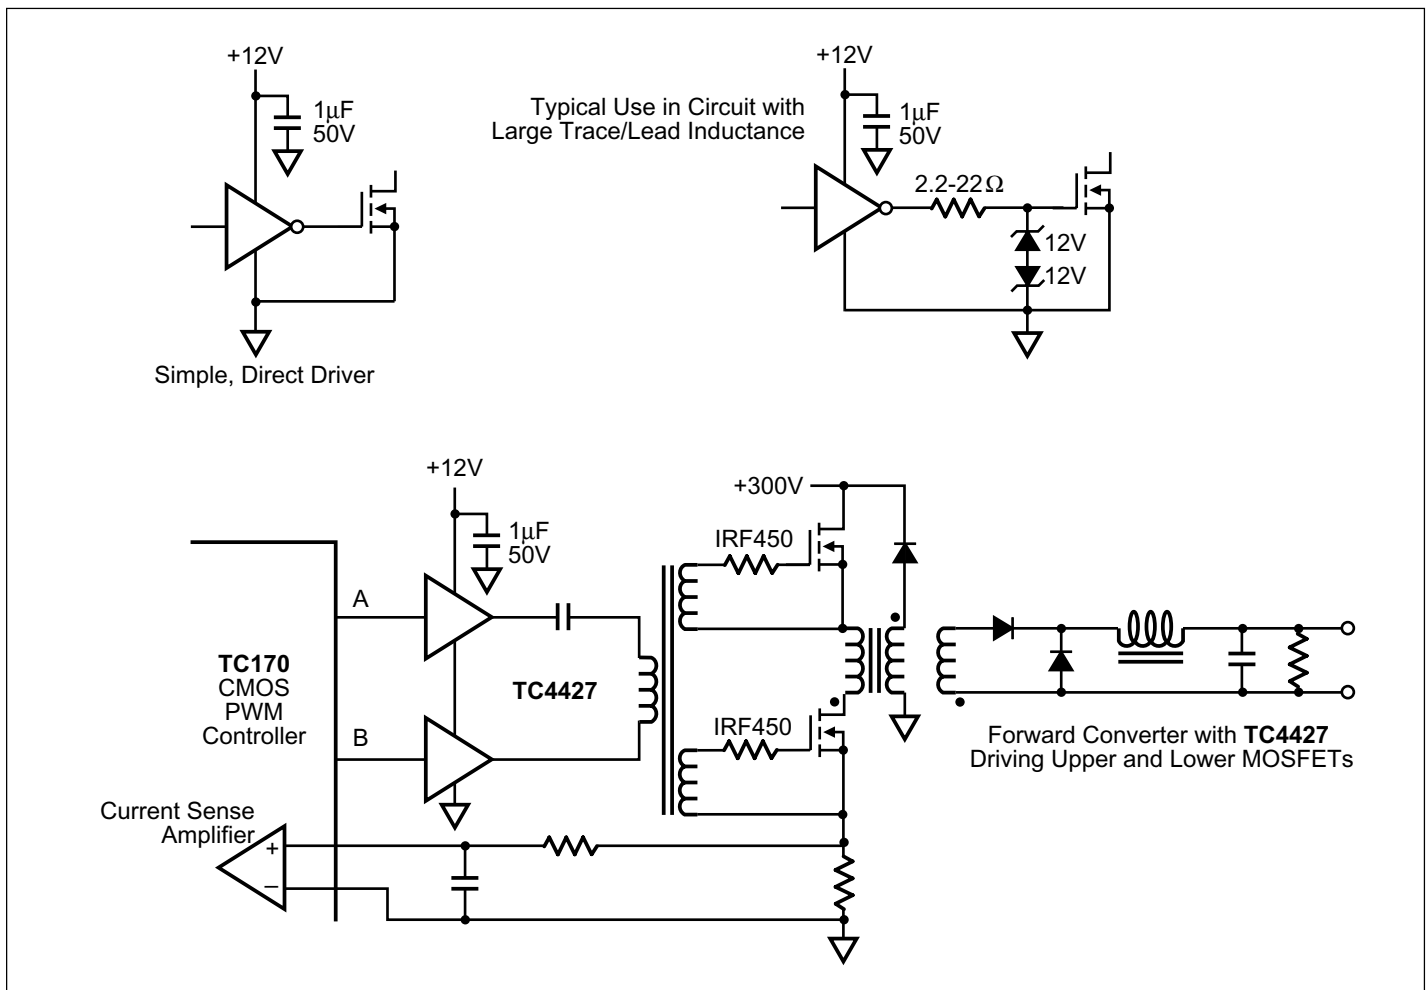


FIGURE 4: Typical applications.

Another important improvement in the second generation families is their ability to have the input signal go below the negative rail by as much as 5V. This guaranteed parameter is very useful in systems where the control circuit ground is not closely tied to the power or source ground of the MOSFET. These two grounds often move relative to one another.

The TC1426 is a special, low-cost version of the 426 family that does not have the below-rail protection on the input. It is a good choice for large volume OEMs.

Following the same part numbering pattern as the 1.5A TC426 family, the TC4423 family of dual drivers has a 3A output capacity. The TC4424 is a dual non-inverting driver and the TC4425 is one inverting plus one non-inverting driver.

The TC4429 is a single inverting driver (like its predecessor the TC429), while the TC4420 is non-inverting. This family has a 6A drive capability at 18V. The TC4429 can slew a 10,000pF load at 18V in 65nsec typically.

The table on the following page shows the performance of the various drivers under production test methods. The characteristics of the drivers are more fully described in their individual data sheets. This table is intended only as a guide for comparing specifications. Refer to the individual data sheets for more complete information.

The following families of power drivers are made with a CMOS process to interface between low-level control functions and high-power switching devices, particularly power MOSFETs. The devices are also an optimum choice for capacitive drivers where 1.2A–9A may be switched. With both inverting and non-inverting outputs available, logic signals of either polarity may be accepted.

Device No.	Drive Current (Peak)	Number of Outputs and Type Inverting Non-Invert.	Time @ Rated Load (pF)	Rise Time @ Rated Load (nsec)	Fall Edge Rated Load (nsec)	Rising Edge Prop. Delay (nsec)	Falling Edge Prop. Delay (nsec)	Latch-Up Proof	Input Protected to 5V Below Gnd Rail
TC1426	1.2A	Dual	1000	35	25	75	75	Yes	No
TC1427	1.2A	Dual	1000	35	25	75	75	Yes	No
TC1428	1.2A	Single Single	1000	35	25	75	75	Yes	No
TC4426	1.5A	Dual	1000	19	19	20	40	Yes	Yes
TC4427	1.5A	Dual	1000	19	19	20	40	Yes	Yes
TC4428	1.5A	Single Single	1000	19	19	20	40	Yes	Yes
TC4423	3.0A	Dual	1800	23	25	33	38	Yes	Yes
TC4424	3.0A	Dual	1800	23	25	33	38	Yes	Yes
TC4425	3.0A	Single Single	1800	23	25	33	38	Yes	Yes
TC4420	6.0A	Single	2500	25	25	55	55	Yes	Yes
TC4429	6.0A	Single	2500	25	25	55	55	Yes	Yes
TC4421	9.0A	Single	10,000	60	60	30	33	Yes	Yes
TC4422	9.0A	Single	10,000	60	60	30	33	Yes	Yes
TC4467	1.2A	— Quad NAND —	470	15	15	40	40	Yes	Yes
TC4468	1.2A	— Quad AND —	470	15	15	40	40	Yes	Yes
TC4469	1.2A	— Quad —	470	15	15	40	40	Yes	Yes

TABLE 1: Selecting MOSFET drivers.

MOSFET Size	Die Size (mm)	Total C of MOSFET (pF)	Suggested MOSFET Driver (@ 12V)	Faster Rise/Fall Times
Hex 0	0.89 x 1.09	400	TC1426-28/4426-28/4467-69	
Hex 1	1.75 x 2.41	750	TC1426-28/4426-28/4467-69	
Hex 2	3.40 x 2.21	1500	TC1426-28/4426-28/4467-69	TC4423-25
Hex 3	4.44 x 2.79	3000	TC1426-28/4426-28	TC4423-25
Hex 4	7.04 x 4.32	6000	TC4423-25	TC4420/29
Hex 5	6.45 x 6.45	12,000	TC4423-25	TC4420/29
Hex 6	283 x 321 mil	15,000	TC4420/29	TC4421/22
Hex 7	283 x 348 mil	16,000	TC4420/29	TC4421/22
Parallel Modules	Various	Up to 48,000	TC4421/22	

TABLE 2: MOSFET die size suggested driver families.

CONCLUSIONS

To match any MOSFET to its proper driver, use the chart above (which will take care of the largest number of applications), or use the simple formula: rise time (dt) = driver supply voltage (dV), times capacitance (C), all divided by driver peak current (I); restated:

$$dt = [(dV) \times C] / I$$

If you need to drive any power MOSFET, there is a Microchip driver to do the job.

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

Trademarks


The Microchip name and logo, the Microchip logo, PIC, PICmicro, PICMASTER, PICSTART, PRO MATE, KEELOQ, SEEVAL, MPLAB and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


Total Endurance, ICSP, In-Circuit Serial Programming, Filter-Lab, MXDEV, microID, *FlexROM*, *fuzzyLAB*, MPASM, MPLINK, MPLIB, PICC, PICDEM, PICDEM.net, ICEPIC, Migratable Memory, FanSense, ECONOMONITOR, Select Mode and microPort are trademarks of Microchip Technology Incorporated in the U.S.A.

Serialized Quick Term Programming (SQTP) is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2001, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

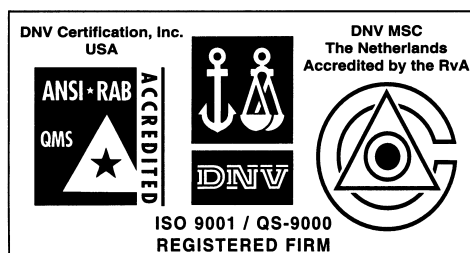

Microchip received QS-9000 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona in July 1999. The Company's quality system processes and procedures are QS-9000 compliant for its PICmicro® 8-bit MCUs, KEELOQ® code hopping devices, Serial EEPROMs and microperipheral products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001 certified.



MICROCHIP

WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200 Fax: 480-792-7277
Technical Support: 480-792-7627
Web Address: <http://www.microchip.com>

Rocky Mountain

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7966 Fax: 480-792-7456

Atlanta

500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Austin - Analog

13740 North Highway 183
Building J, Suite 4
Austin, TX 78750
Tel: 512-257-3370 Fax: 512-257-8526

Boston

2 Lan Drive, Suite 120
Westford, MA 01886
Tel: 978-692-3848 Fax: 978-692-3821

Boston - Analog

Unit A-8-1 Millbrook Tarry Condominium
97 Lowell Road
Concord, MA 01742
Tel: 978-371-6400 Fax: 978-371-0050

Chicago

333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

4570 Westgrove Drive, Suite 160
Addison, TX 75001
Tel: 972-818-7423 Fax: 972-818-2924

Dayton

Two Prestige Place, Suite 130
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Detroit

Tri-Atria Office Building
32255 Northwestern Highway, Suite 190
Farmington Hills, MI 48334
Tel: 248-538-2250 Fax: 248-538-2260

Los Angeles

18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 949-263-1888 Fax: 949-263-1338

New York

150 Motor Parkway, Suite 202
Hauppauge, NY 11788
Tel: 631-273-5305 Fax: 631-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

Toronto

6285 Northam Drive, Suite 108
Mississauga, Ontario L4V 1X5, Canada
Tel: 905-673-0699 Fax: 905-673-6509

ASIA/PACIFIC

Australia

Microchip Technology Australia Pty Ltd
Suite 22, 41 Rawson Street
Epping 2121, NSW
Australia
Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Microchip Technology Consulting (Shanghai)
Co., Ltd., Beijing Liaison Office
Unit 915
Bei Hai Wan Tai Bldg.
No. 6 Chaoyangmen Beidajie
Beijing, 100027, No. China
Tel: 86-10-85282100 Fax: 86-10-85282104

China - Chengdu

Microchip Technology Consulting (Shanghai)
Co., Ltd., Chengdu Liaison Office
Rm. 2401, 24th Floor,
Ming Xing Financial Tower
No. 88 TIDU Street
Chengdu 610016, China
Tel: 86-28-6766200 Fax: 86-28-6766599

China - Fuzhou

Microchip Technology Consulting (Shanghai)
Co., Ltd., Fuzhou Liaison Office
Rm. 531, North Building
Fujian Foreign Trade Center Hotel
73 Wusi Road
Fuzhou 350001, China
Tel: 86-591-7557563 Fax: 86-591-7557572

China - Shanghai

Microchip Technology Consulting (Shanghai)
Co., Ltd.
Room 701, Bldg. B
Far East International Plaza
No. 317 Xian Xia Road
Shanghai, 200051
Tel: 86-21-6275-5700 Fax: 86-21-6275-5060

China - Shenzhen

Microchip Technology Consulting (Shanghai)
Co., Ltd., Shenzhen Liaison Office
Rm. 1315, 13/F, Shenzhen Kerry Centre,
Renminnan Lu
Shenzhen 518001, China
Tel: 86-755-2350361 Fax: 86-755-2366086

Hong Kong

Microchip Technology Hongkong Ltd.
Unit 901-6, Tower 2, Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2401-1200 Fax: 852-2401-3431

India

Microchip Technology Inc.
India Liaison Office
Divyasree Chambers
1 Floor, Wing A (A3/A4)
No. 11, O'Shaughnessey Road
Bangalore, 560 025, India
Tel: 91-80-2290061 Fax: 91-80-2290062

Japan

Microchip Technology Japan K.K.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa, 222-0033, Japan
Tel: 81-45-471-6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea 135-882
Tel: 82-2-554-7200 Fax: 82-2-558-5934

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore, 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan

Microchip Technology Taiwan
11F-3, No. 207
Tung Hua North Road
Taipei, 105, Taiwan
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Denmark

Microchip Technology Denmark ApS
Regus Business Centre
Lautrup høj 1-3
Ballerup DK-2750 Denmark
Tel: 45 4420 9895 Fax: 45 4420 9910

France

Arizona Microchip Technology SARL
Parc d'Activite du Moulin de Massy
43 Rue du Saule Trapu
Batiment A - 1er Etage
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann Ring 125
D-81739 Munich, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Germany - Analog

Lochamer Strasse 13
D-82152 Martinsried, Germany
Tel: 49-89-895650-0 Fax: 49-89-895650-22

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-039-65791-1 Fax: 39-039-6899883

United Kingdom

Arizona Microchip Technology Ltd.
505 Eskdale Road
Winnersh Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44 118 921 5869 Fax: 44-118 921-5820

08/01/01