

## 63CNQ... SERIES

### SCHOTTKY RECTIFIER

60 Amp


#### Major Ratings and Characteristics

| Characteristics                                     | 63CNQ...   | Units            |
|-----------------------------------------------------|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                    | 60         | A                |
| $V_{RRM}$                                           | 80 to 100  | V                |
| $I_{FSM}$ @ tp = 5 $\mu$ s sine                     | 8200       | A                |
| $V_F$ @ 30 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.64       | V                |
| $T_J$                                               | -55 to 175 | $^\circ\text{C}$ |

#### Description/Features

The 63CNQ center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175  $^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175  $^\circ\text{C}$   $T_J$  operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, small footprint, high current package

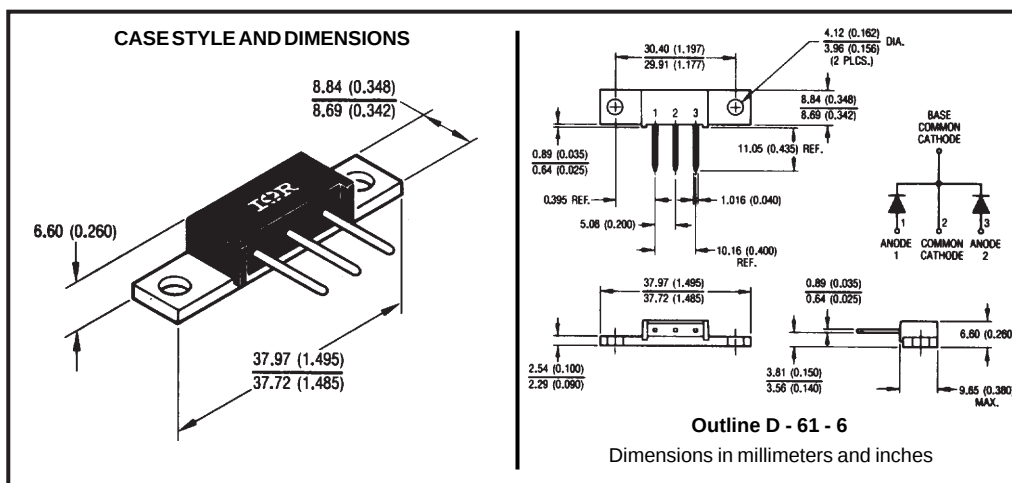

## Voltage Ratings

| Part number                                     | 63CNQ080 | 63CNQ100 |
|-------------------------------------------------|----------|----------|
| $V_R$ Max. DC Reverse Voltage (V)               | 80       | 100      |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |          |          |

## Absolute Maximum Ratings

| Parameters                                                                        | 63CNQ | Units | Conditions                                                                                                                                                 |
|-----------------------------------------------------------------------------------|-------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_{F(AV)}$ Max. Average Forward Current<br>* See Fig. 5                          | 60    | A     | 50% duty cycle @ $T_C = 155^\circ\text{C}$ , rectangular wave form                                                                                         |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 8200  | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse<br>10ms Sine or 6ms Rect. pulse<br>Following any rated load condition and with rated $V_{RWM}$ applied |
|                                                                                   | 620   |       |                                                                                                                                                            |
| $E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)                                | 15    | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 30$ mH                                                                                                  |
| $I_{AR}$ Repetitive Avalanche Current (Per Leg)                                   | 1     | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ , max. $V_A = 1.5 \times V_R$ typical                                 |

## Electrical Specifications

| Parameters                                                       | 63CNQ  | Units            | Conditions                                                              |
|------------------------------------------------------------------|--------|------------------|-------------------------------------------------------------------------|
| $V_{FM}$ Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)    | 0.77   | V                | @ 30A<br>$T_J = 25^\circ\text{C}$                                       |
|                                                                  | 0.93   | V                | @ 60A                                                                   |
|                                                                  | 0.64   | V                | @ 30A<br>$T_J = 125^\circ\text{C}$                                      |
|                                                                  | 0.76   | V                | @ 60A                                                                   |
| $I_{RM}$ Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1) | 1.5    | mA               | $T_J = 25^\circ\text{C}$<br>$V_R = \text{rated } V_R$                   |
|                                                                  | 20     | mA               | $T_J = 125^\circ\text{C}$                                               |
| $C_T$ Max. Junction Capacitance (Per Leg)                        | 1400   | pF               | $V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)                        | 6.0    | nH               | Measured lead to lead 5mm from package body                             |
| $dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )               | 10,000 | V/ $\mu\text{s}$ |                                                                         |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters                                                        | 63CNQ       | Units              | Conditions                           |
|-------------------------------------------------------------------|-------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                             | -55 to 175  | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                          | -55 to 175  | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)     | 0.85        | $^\circ\text{C/W}$ | DC operation * See Fig. 4            |
| $R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package) | 0.42        | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case to Heatsink           | 0.30        | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight                                             | 7.8(0.28)   | g(oz.)             |                                      |
| T Mounting Torque                                                 | Min. 40(35) | Kg-cm<br>(lbf-in)  |                                      |
|                                                                   | Max. 58(50) |                    |                                      |
| Case Style                                                        | D - 61 - 6  |                    |                                      |

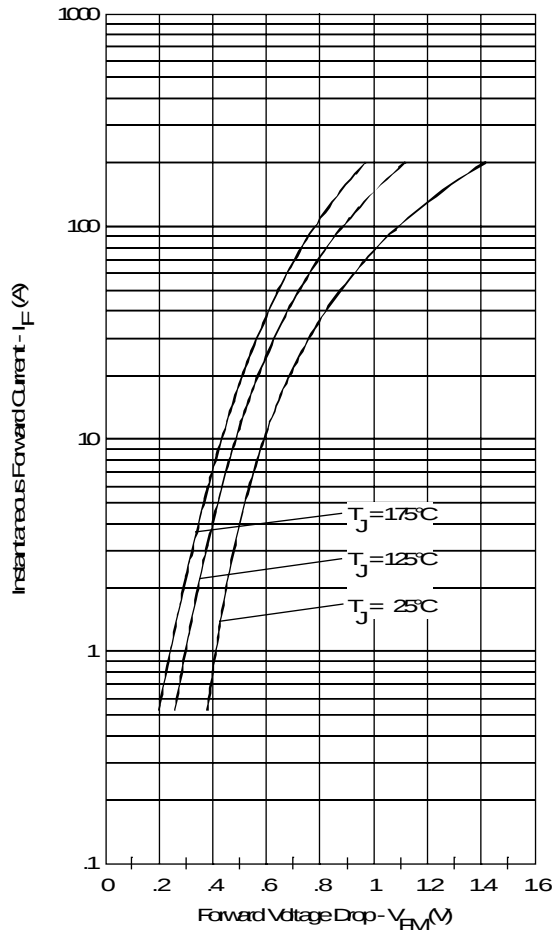


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

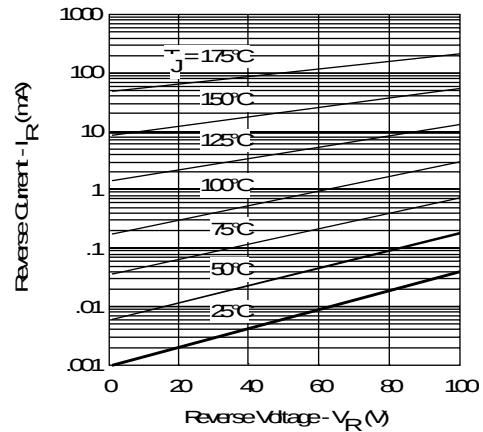


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

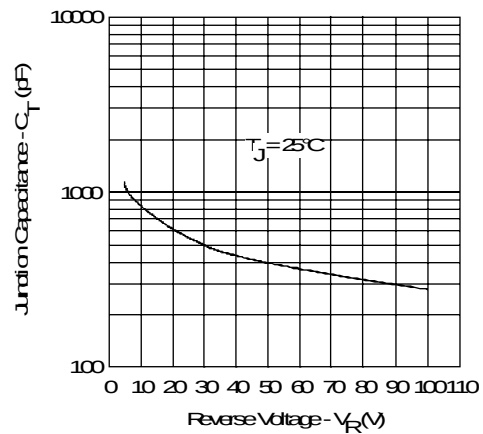


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

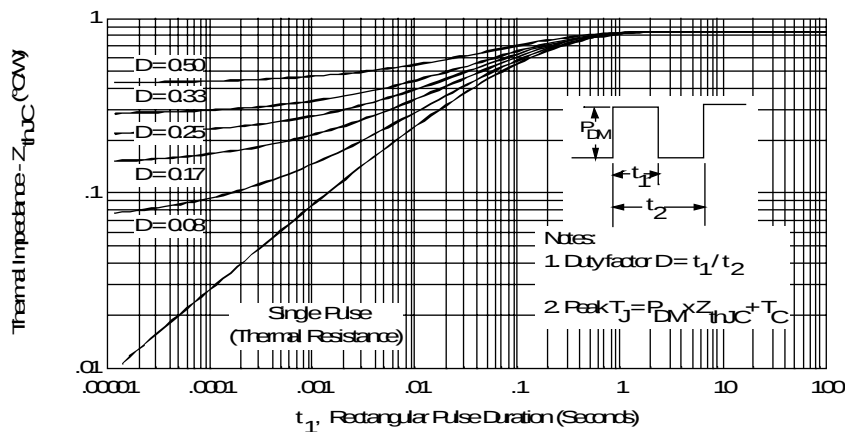


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

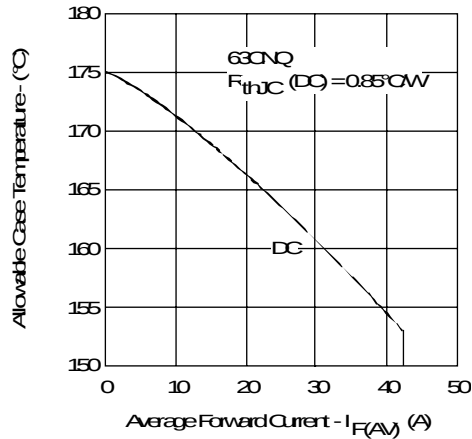


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

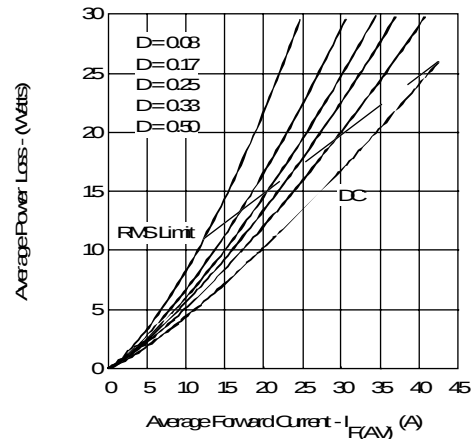


Fig. 6- Forward Power Loss Characteristics (Per Leg)

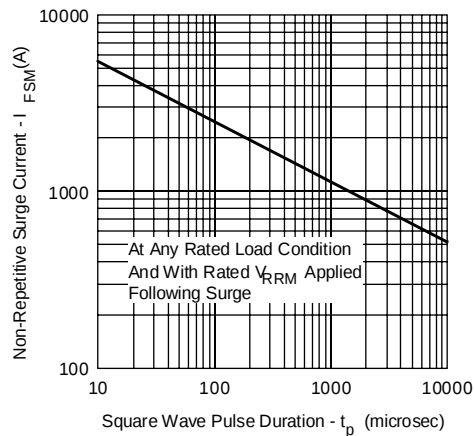


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

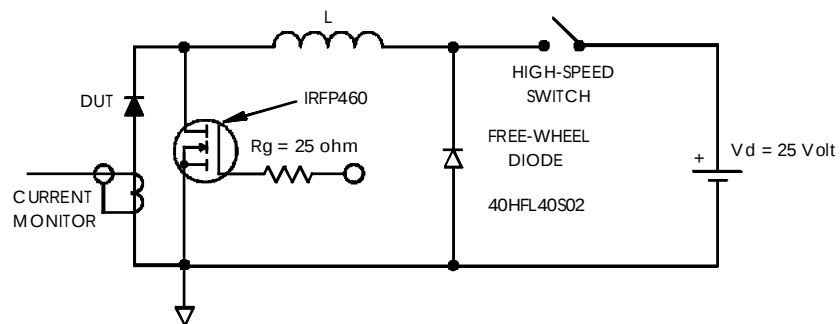


Fig. 8- Unclamped Inductive Test Circuit