

Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved 

90 A
110 A

Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	90MT.KB	110MT.KB	Units
I_O	90 (120)	110 (150)	A
@ T_C	90 (61)	90 (57)	°C
I_{FSM} @ 50Hz	770	950	A
@ 60Hz	810	1000	A
I^2t @ 50Hz	3000	4500	A ² s
@ 60Hz	2700	4100	A ² s
$I^2\sqrt{t}$	30000	45000	A ² √s
V_{RRM} range	800 to 1600		V
T_{STG} range	- 40 to 150		°C
T_J range	- 40 to 150		°C

90-110MT..KB Series

Bulletin I27501 rev. A 05/03

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max. mA
90-110MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameter	90MT.KB	110MT.KB	Units	Conditions
I_O Maximum DC output current @ Case temperature	90 (120)	110 (150)	A	120° Rect conduction angle
	90 (61)	90 (57)	°C	
I_{FSM} Maximum peak, one-cycle forward, non-repetitive surge current	770	950	A	t = 10ms No voltage
	810	1000		t = 8.3ms reapplied
	650	800		t = 10ms 100% V_{RRM}
	680	840		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	3000	4500	A ² s	t = 10ms No voltage
	2700	4100		t = 8.3ms reapplied
	2100	3200		t = 10ms 100% V_{RRM}
	1900	2900		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	30000	45000	A ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.89	0.81	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_J max.
$V_{F(TO)2}$ High level value of threshold voltage	1.05	0.99		$(I > \pi \times I_{F(AV)})$, @ T_J max.
r_{f1} Low level value of forward slope resistance	5.11	4.37	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, @ T_J max.
r_{f2} High level value of forward slope resistance	4.64	4.64		$(I > \pi \times I_{F(AV)})$, @ T_J max.
V_{FM} Maximum forward voltage drop	1.6	1.4	V	$I_{pk} = 150A$, $T_J = 25^\circ C$, $t_p = 400\mu s$ single junction
V_{INS} RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$, all terminal shorted f = 50Hz, t = 1s

Thermal and Mechanical Specifications

Parameter	90MT.KB	110MT.KB	Units	Conditions
T_J Max. junction operating temperature range	-40 to 150		°C	
T_{stg} Max. storage temperature range	-40 to 150		°C	
R_{thJC} Max. thermal resistance, junction to case	0.21	0.18	K/W	DC operation per module
	1.26	1.07		DC operation per junction
	0.25	0.21		120° Rect conduction angle per module
	1.47	1.25		120° Rect conduction angle per junction
R_{thCS} Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque ± 10%	to heatsink	4 to 6	Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	to terminal	3 to 4		
wt Approximate weight	176		g	


Ordering Information Table

Device Code

11	0	MT	160	K	B
①	②	③	④	⑤	

- 1** - Current rating code: 9 = 90 A (Avg)
11 = 110 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings Table)
- 5** - Generation II

Outline Table (without optional barriers)

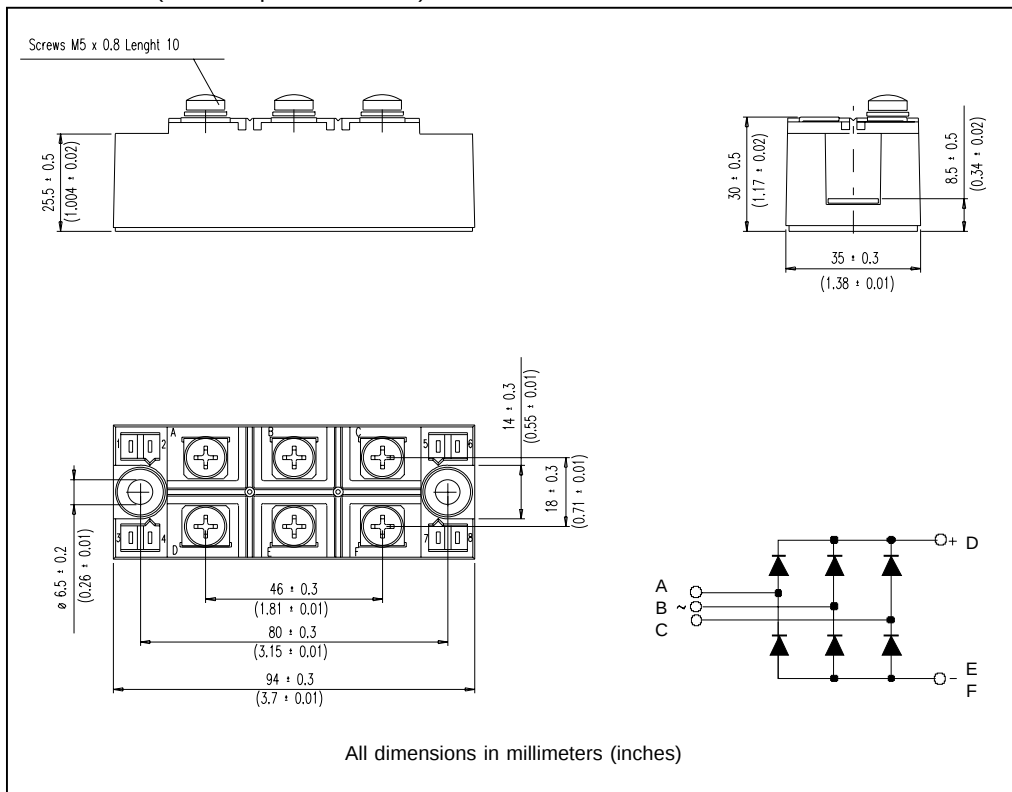

NOTE: To order the Optional Hardware see Bulletin I27900

Bulletin 127501 rev. A 05/03

IOR Rectifier

Technical drawing of the 6ES7 321-1BH02-0AA0 module, showing dimensions in millimeters (mm) and inches (in).

Top View Dimensions:

- Overall Width: 18 ± 0.3 mm (0.71 ± 0.01 in)
- Overall Height: 14 ± 0.3 mm (0.55 ± 0.01 in)
- Internal Width (between columns): 46 ± 0.3 mm (1.81 ± 0.01 in)
- Internal Height (between rows): 80 ± 0.3 mm (3.15 ± 0.01 in)
- Bottom Width: 94 ± 0.3 mm (3.70 ± 0.01 in)
- Bottom Height: 6.5 ± 0.2 mm (0.26 ± 0.008 in)

Side View Dimensions:

- Overall Height: 25.5 ± 0.5 mm (1 ± 0.02 in)
- Internal Width: 35 ± 0.3 mm (1.38 ± 0.01 in)

Front View Dimensions:


- Overall Height: 30 ± 0.5 mm (1.17 ± 0.02 in)
- Overall Width: 38 ± 0.5 mm (1.5 ± 0.02 in)

Notes:

- Screws M5x0.8 Length 10

Wiring Diagram:

The diagram shows a 3-phase input (A, B, C) connected to a 3-phase output (D, E, F) through a bridge rectifier.



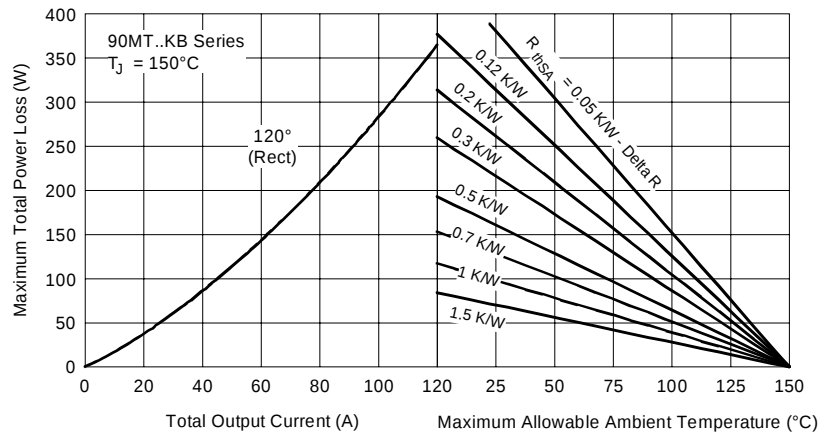


Fig. 3 - Total Power Loss Characteristics

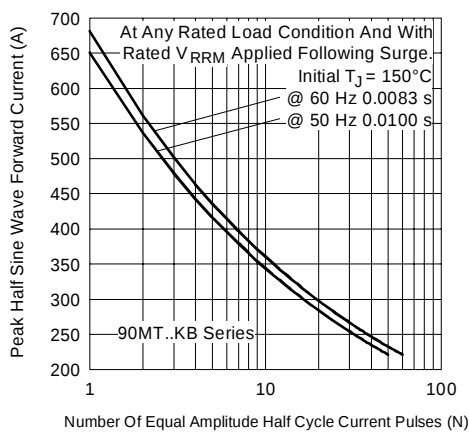


Fig. 4 - Maximum Non-Repetitive Surge Current

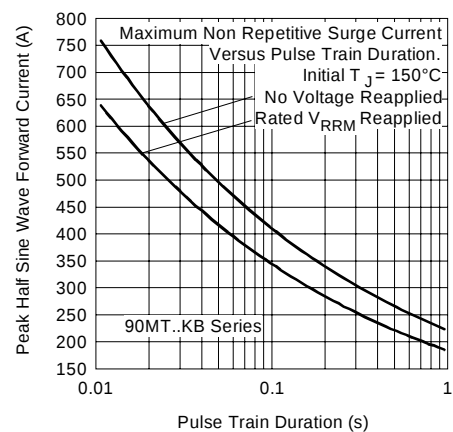


Fig. 5 - Maximum Non-Repetitive Surge Current

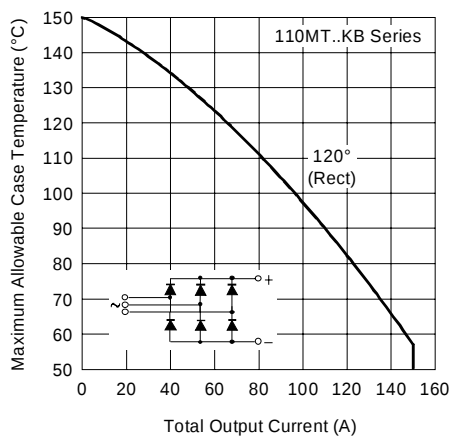


Fig. 6 - Current Ratings Characteristics

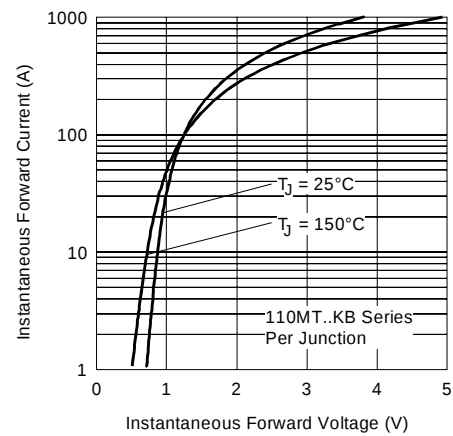


Fig. 7 - Forward Voltage Drop Characteristics

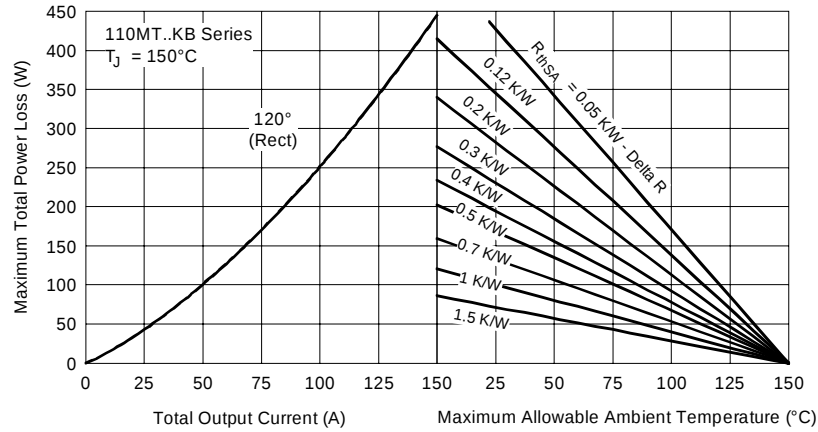


Fig. 8 - Total Power Loss Characteristics

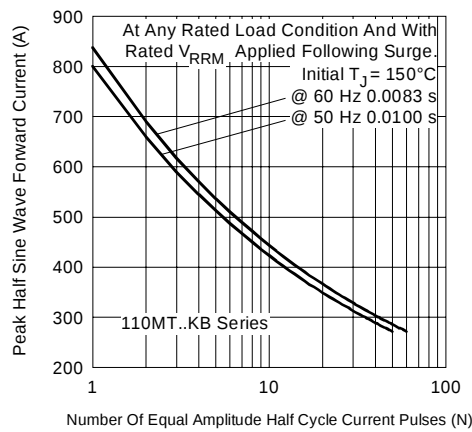


Fig. 9 - Maximum Non-Repetitive Surge Current

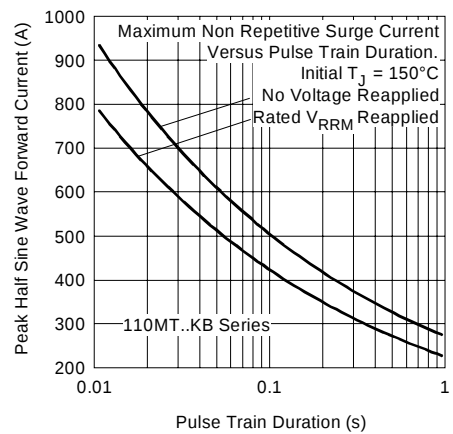


Fig. 10 - Maximum Non-Repetitive Surge Current

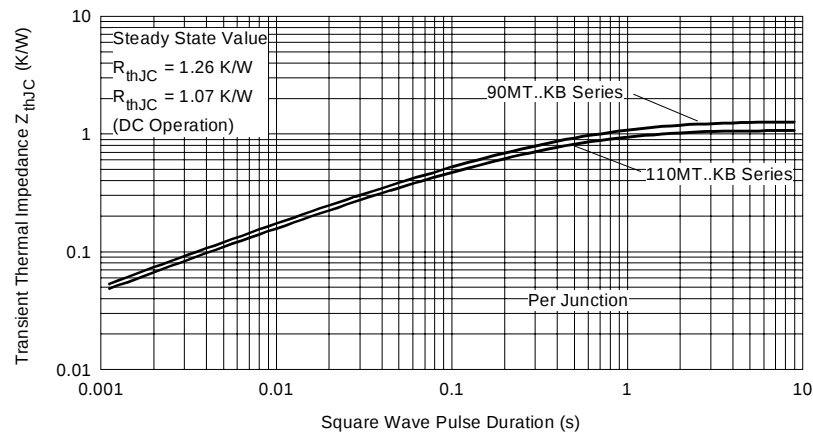


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 05/03