

APT2X60/61S20J 200V 60A

## DUAL DIE ISOTOP® PACKAGE HIGH VOLTAGE SCHOTTKY DIODES

PRODUCT APPLICATIONS	PRODUCT FEATURES	PRODUCT BENEFITS
<ul style="list-style-type: none"> <li>• Parallel Diode               <ul style="list-style-type: none"> <li>-Switchmode Power Supply</li> <li>-Inverters</li> </ul> </li> <li>• Free Wheeling Diode               <ul style="list-style-type: none"> <li>-Motor Controllers</li> <li>-Converters</li> </ul> </li> <li>• Snubber Diode</li> <li>• Uninterruptible Power Supply (UPS)</li> <li>• 48 Volt Output Rectifiers</li> <li>• High Speed Rectifiers</li> </ul>	<ul style="list-style-type: none"> <li>• Ultrafast Recovery Times</li> <li>• Soft Recovery Characteristics</li> <li>• Popular SOT-227 Package</li> <li>• Low Forward Voltage</li> <li>• High Blocking Voltage</li> <li>• Low Leakage Current</li> </ul>	<ul style="list-style-type: none"> <li>• Low Losses</li> <li>• Low Noise Switching</li> <li>• Cooler Operation</li> <li>• Higher Reliability Systems</li> <li>• Increased System Power Density</li> </ul>

### MAXIMUM RATINGS

All Ratings are per diode:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT2X60/61S20J	UNIT
$V_R$	Maximum D.C. Reverse Voltage	200	Volts
$V_{RRM}$	Maximum Peak Repetitive Reverse Voltage		
$V_{RWM}$	Maximum Working Peak Reverse Voltage		
$I_F(\text{AV})$	Maximum Average Forward Current ( $T_C = 110^\circ\text{C}$ , Duty Cycle = 0.5)	60	Amps
$I_F(\text{RMS})$	RMS Forward Current	195	
$I_{FSM}$	Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3ms)	TBD	
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_L$	Lead Temperature: 0.063" from Case for 10 Sec.	300	
$E_{AVL}$	Avalanche Energy (2A, 30mH)	60	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT	
$V_F$	Maximum Forward Voltage		$I_F = 60\text{A}$	0.83	0.90	Volts
			$I_F = 120\text{A}$	.96		
			$I_F = 60\text{A}, T_J = 150^\circ\text{C}$		0.80	
$I_{RM}$	Maximum Reverse Leakage Current		$V_R = V_R \text{ Rated}$		1	mA
			$V_R = V_R \text{ Rated}, T_J = 125^\circ\text{C}$		25	
$C_T$	Junction Capacitance, $V_R = 100\text{V}$		285		pF	
$L_S$	Series Inductance (Lead to Lead 5mm from Base)		10		nH	

APT Website - <http://www.advancedpower.com>

<b>USA</b>	405 S.W. Columbia Street	Bend, Oregon 97702-1035	Phone: (541) 382-8028	FAX: (541) 388-0364
<b>EUROPE</b>	Chemin de Magret	F-33700 Merignac - France	Phone: (33) 5 57 92 15 15	FAX: (33) 5 56 47 97 61

**DYNAMIC CHARACTERISTICS**

**APT2X60/61S20J**


Symbol	Characteristic	MIN	TYP	MAX	UNIT
$t_{rr1}$	Reverse Recovery Time, $I_F = 1.0A$ , $di_F/dt = -15A/\mu s$ , $V_R = 30V$ , $T_J = 25^\circ C$		TBD	TBD	ns
$t_{rr2}$	Reverse Recovery Time	$T_J = 25^\circ C$	65		
$t_{rr3}$	$I_F = 60A$ , $di_F/dt = -100A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	94		
$t_{fr1}$	Forward Recovery Time	$T_J = 25^\circ C$	TBD		
$t_{fr2}$	$I_F = 60A$ , $di_F/dt = 100A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	TBD		
$I_{RRM1}$	Reverse Recovery Current	$T_J = 25^\circ C$	3.6		Amps
$I_{RRM2}$	$I_F = 60A$ , $di_F/dt = -100A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	5.5		
$Q_{rr1}$	Recovery Charge	$T_J = 25^\circ C$	140		nC
$Q_{rr2}$	$I_F = 60A$ , $di_F/dt = -100A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	305		
$V_{fr1}$	Forward Recovery Voltage	$T_J = 25^\circ C$	TBD		Volts
$V_{fr2}$	$I_F = 60A$ , $di_F/dt = 100A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	TBD		
$diM/dt$	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	TBD		A/ $\mu s$
		$T_J = 100^\circ C$	TBD		

**THERMAL AND MECHANICAL CHARACTERISTICS**

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			0.66	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			20	
$V_{Isolation}$	RMS Voltage (50-60 Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.)	2500			Volts
$W_T$	Package Weight		1.03		oz
			29.2		gm
Torque	Maximum Torque (Mounting = 8-32 or 4mm Machine and Terminals = 4mm Machine)			13.6	lb•in
				1.5	N•m

APT Reserves the right to change, without notice, the specifications and information contained herein.

**SOT-227 Package Outline**

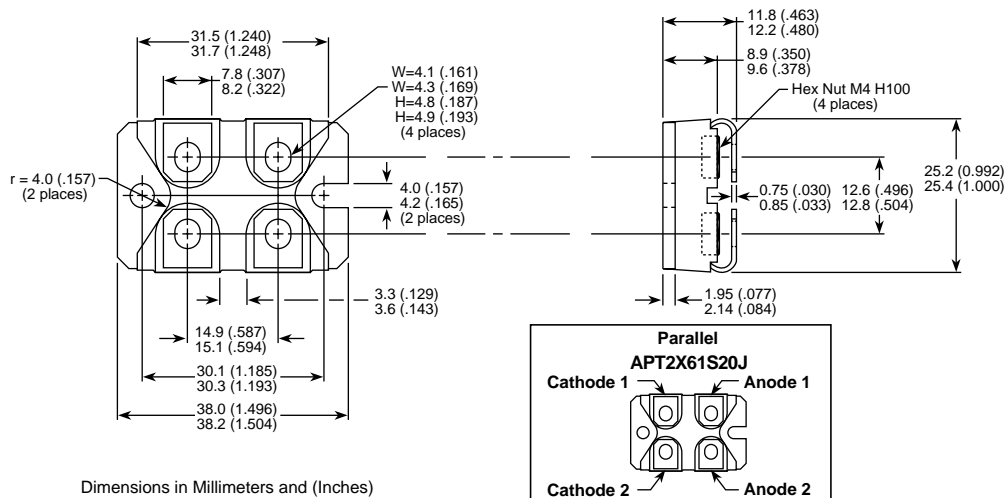

053-6044 Rev A 6-2002

APT's devices are covered by one or more of the following U.S. patents:  
 ISOTOP® is a Registered Trademark of SGS Thomson.

4,895,810	5,045,903	5,089,434	5,182,234	5,019,522	5,262,336
5,256,583	4,748,103	5,283,202	5,231,474	5,434,095	5,528,058