

形 名	社 名	最 大 定 格							順 方 向 特 性			逆 方 向 特 性			t r r max				そ の 他 の 特 性 等	外 形	
		V _{RRM}	V _{RRM}	V _R	I _O	T条件	I _{FSM}	T条件	V _{Fmax}	測定条件		I _{Rmax}	測定条件		測定 条件						
		(V)	(V)	(V)	(A)	(℃)	(A)	(℃)	(V)	I _F (A)	T(℃)	(mA)	V _R (V)	T(℃)	(ns)	I _F (A)	I _R (A)	dI _F /dt (A/μs)			
EA30QS04	日本インテック	45	40		3		45		0.55	3		3	40								1D
EA30QS04-F	日本インテック	45	40		3		45		0.55	3		3	40								2D
EA30QS05	日本インテック	55	50		3		45		0.58	3		3	50								1D
EA30QS05-F	日本インテック	55	50		3		45		0.58	3		3	50								2D
EA30QS06	日本インテック	65	60		3		45		0.58	3		3	60								1D
EA30QS06-F	日本インテック	65	60		3		45		0.58	3		3	60								2D
EA30QS09	日本インテック	90	90		3		45		0.85	3		1	90								1D
EA30QS09-F	日本インテック	90	90		3		45		0.85	3		1	90								2D
EA30QS10	日本インテック	100	100		3		45		0.85	3		1	100								1D
EA30QS10-F	日本インテック	100	100		3		45		0.85	3		1	100								2D
EC10QS03	日本インテック	35	30		1		20		0.55	1		1	30								485C
EC10QS04	日本インテック	45	40		1		20		0.55	1		1	40								485C
EC10QS05	日本インテック	55	50		1		20		0.58	1		1	50								485C
EC10QS06	日本インテック	65	60		1		20		0.58	1		1	60								485C
EC10QS09	日本インテック	90	90		1		20		0.85	1		0.5	90								485C
EC10QS10	日本インテック	100	100		1		20		0.85	1		0.5	100								485C
EK03	サンケン	35	30	21	1	40a	40		0.55	1		5	30	200	0.1	0.1					67B
EK04	サンケン	45	40	28	1	40a	40		0.55	1		5	40	200	0.1	0.1					67B
EK06	サンケン	60	60		0.7	40a	10		0.62	0.7		1	60	100	0.1	0.1					67B
EK09	サンケン	90	90		0.7	50a	10		0.81	0.7		1	90	100	0.1	0.1					67B
EK13	サンケン	35	30	21	1.5	40a	40		0.55	1		5	30	200	0.1	0.1					67C
EK14	サンケン	45	40	28	1.5	40a	40		0.55	1		5	40	200	0.1	0.1					67C
EK16	サンケン	60	60		1.5	30a	25		0.62	1.5		1	60	100	0.1	0.1					67C
EK19	サンケン	90	90		1.5	30a	40		0.81	1.5		2	90	100	0.1	0.1					67C
ERA81-004	富士電機	40	40		1	50	125j		0.55	1		2	40								20D
ERA82-004	富士電機	40	40		0.6	60a	25	125j	0.55	0.6		1	40								20K
ERA83-004	富士電機	40	40		1	40	125j		0.55	1		2	40								20K
ERA83-006	富士電機	60	60		1	111L	30	125j	0.58	1		2	60								20K
ERA84-009	富士電機	90	90		1	30	30		0.9	1		1	90								20D
ERA85-009	富士電機	90	90		1	30	125j		0.82												20K
ERB81-004	富士電機	40	40		1.7	100	125j		0.55	2		5	40								261A
ERB83-004	富士電機	40	40		1.7	80			0.55	2		5	40								20E
ERB83-006	富士電機	60	60		1.7	80	125j		0.55	2		5	60								20E
ERB84-009	富士電機	90	90		2	60			0.9	2		2	90								261A
ERC62-004	富士電機	45	40		10	110c	250	125j	0.6	10		2	45								272A
ERC62M-004	富士電機	45	40		10	110c	250	125j	0.6	10		2	45								52
ERC80M-004	富士電機	40	40		5	102c	120	125j	0.55	5		5	40								52
ERC80M-006	富士電機	60	60		5	100c	80	125j	0.59	5		5	60								52
ERC80-004	富士電機	40	40		5	102C	120	125j	0.55	5		5	40								272A
ERC81-006	富士電機	60	60		3	104L	80		0.58	3		5	60								261C
ERC81-004	富士電機	40	40		2.6	120	125j		0.55	3		5	40								261A
ERC84-009	富士電機	90	90		3	85L	120		0.9	3		5	90								261B
ERC88M-009	富士電機	90	90		5	85c	80	125j	0.9	4		5	90								52
ERC88-009	富士電機	90	90		5	95C	80		0.9												272A
ERD80-004	富士電機	48	40		15	100C	250	125j	0.55	12.5		10	40								464

Ct=70pF

図11

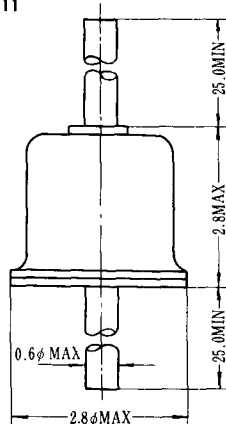


図12

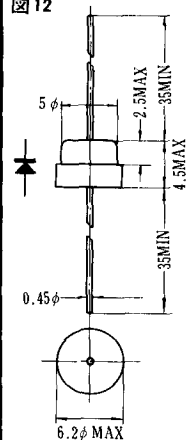


図13

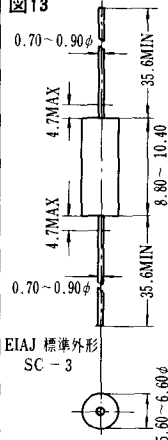


図14

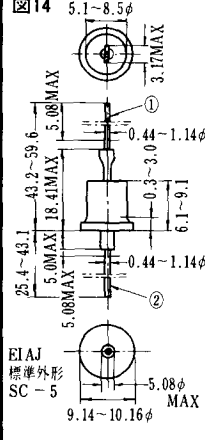


図15

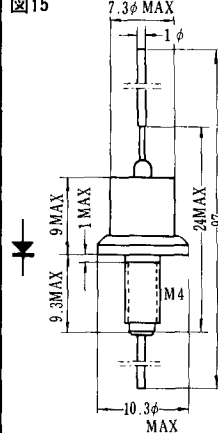


図16

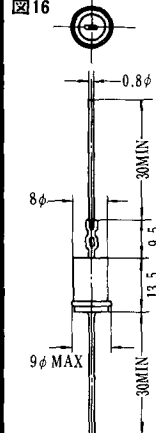


図17

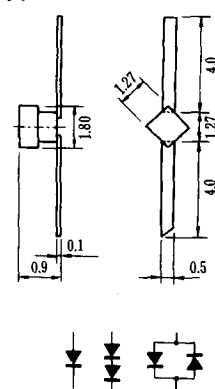


図18

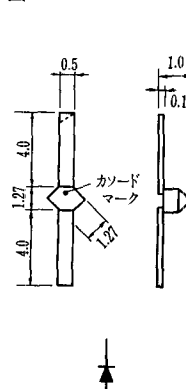


図19

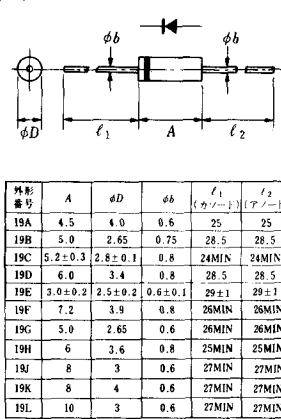


図20


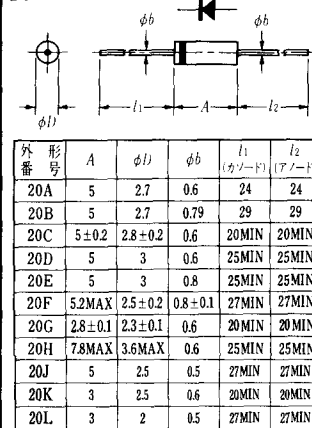


図21

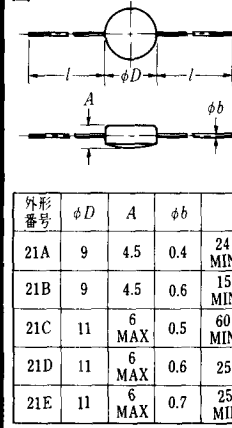

外形番号	A	φD	φb	ℓ1 (カソード)	ℓ2 (アノード)
19A	4.5	4.0	0.6	25	25
19B	5.0	2.65	0.75	28.5	28.5
19C	5.2±0.3	2.8±0.1	0.8	24MIN	24MIN
19D	6.0	3.4	0.8	28.5	28.5
19E	3.0±0.2	2.5±0.2	0.6±0.1	29±1	29±1
19F	7.2	3.9	0.8	26MIN	26MIN
19G	5.0	2.65	0.6	26MIN	26MIN
19H	6	3.6	0.8	25MIN	25MIN
19J	8	3	0.6	27MIN	27MIN
19K	8	4	0.6	27MIN	27MIN
19L	10	3	0.6	27MIN	27MIN

外形番号	A	φD	φb	ℓ1 (カソード)	ℓ2 (アノード)
20A	5	2.7	0.6	24	24
20B	5	2.7	0.79	29	29
20C	5±0.2	2.8±0.2	0.6	20MIN	20MIN
20D	5	3	0.6	25MIN	25MIN
20E	5	3	0.8	25MIN	25MIN
20F	5.2MAX	2.5±0.2	0.8±0.1	27MIN	27MIN
20G	2.8±0.1	2.3±0.1	0.6	20MIN	20MIN
20H	7.8MAX	3.6MAX	0.6	25MIN	25MIN
20J	5	2.5	0.5	27MIN	27MIN
20K	3	2.5	0.6	20MIN	20MIN
20L	3	2	0.5	27MIN	27MIN

外形番号	φD	A	φb	
21A	9	4.5	0.4	24 MIN
21B	9	4.5	0.6	15 MIN
21C	11	6 MAX	0.5	60 MIN
21D	11	6 MAX	0.6	25
21E	11	6 MAX	0.7	25 MIN