

DIODE MODULE (F.R.D.)

FRS400CA120

TOP



UL;E76102 (M)


FRS400CA120 is a high speed isolated diode module designed for high power switching application. **FRS400CA120** is suitable for high frequency application requiring low loss and high speed control.

- High Speed $t_{rr} \leq 400\text{ns}$
- I_F (AV) 400A
- Isolated Mounting base.
- High Surge Capability

(Applications)

Inverter Welding Power Supply
Power Supply for Telecommunication
Various Switching Power Supply.

E $\rightarrow$ C

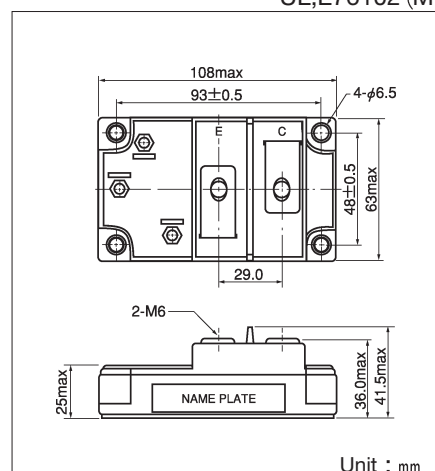

Unit : mm

Maximum Ratings

(T_j=25°C)

Symbol	Item	Ratings	Unit
		FRS400CA120	
V _{RRM}	Repetitive Peak Reverse Voltage	1200	V
V _{R(DC)}	D.C. Reverse Voltage	960	V


Symbol	Item		Conditions	Ratings	Unit
I _F	Forward Current		D.C. T _c : 78°C	400	A
I _{FSM}	Surge Forward Current		1/2 cycle, 60Hz, peak value, non-repetitive	4000	A
I _{st}	I _{st}		Value for one cycle of surge current	66640	A ² S
T _j	Operating Junction Temperature			-40 ~ +150	°C
T _{stg}	Storage Temperature			-40 ~ +125	°C
V _{iso}	Isolation Breakdown Voltage (R.M.S.)		A.C. 1 minute	2500	V
	Mounting Torque	Mounting (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	N·m (kgf·cm)
		Terminal (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	
	Mass		Typical Value	460	g

Electrical Characteristics


Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I _{RRM}	Repetitive Peak Reverse Current	V _R =V _{RRM} , T _j =150°C			20	mA
V _{FM}	Forward Voltage Drop	I _F =400A, Inst. measurement			1.8	V
t _{rr}	Reverse Recovery Time	I _F =400A, -di/dt=400A/μs			400	ns
R _{th(j-c)}	Thermal Impedance	Junction to case			0.1	°C/W




Forward Characteristics

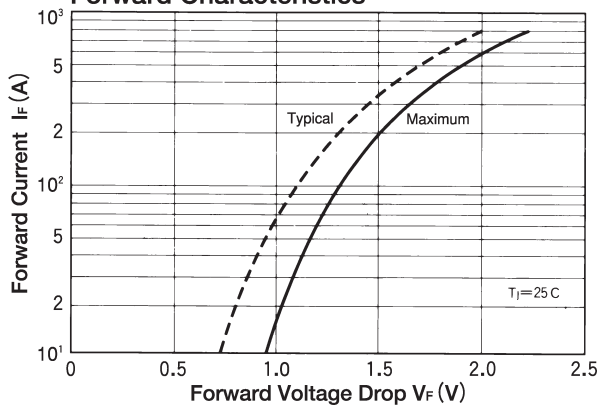

Reverse Recovery Characteristics

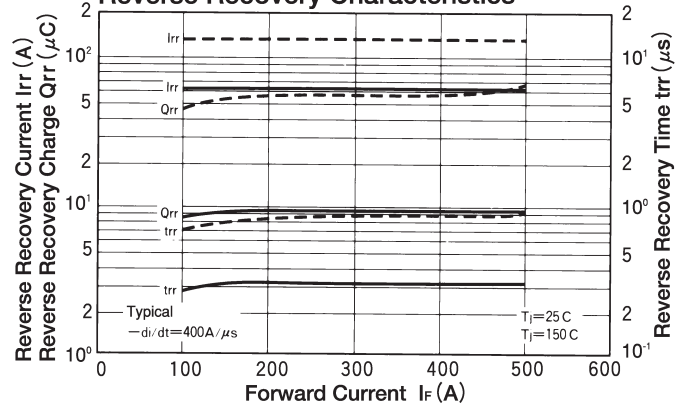

Transient Thermal Impedance

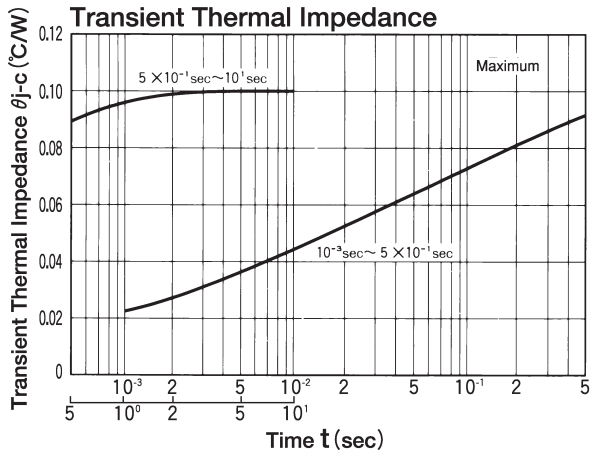

Reverse Recovery Characteristics

