

GT80J101


Unit in mm

HIGH POWER SWITCHING APPLICATIONS.

- High Input Impedance
- High Speed : $t_f=0.40\mu s$ (Max.)
- Low Saturation Voltage : $V_{CE(sat)}=3.5V$ (Max.)
- Enhancement-Mode


MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Emitter Voltage		V_{CES}	600	V
Gate-Emitter Voltage		V_{GES}	± 20	V
Collector Current	DC	I_C	80	A
	1ms	I_{CP}	160	
Collector Power Dissipation (Tc=25°C)		P_C	200	W
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55~150	°C
Screw Torque		—	0.8	N·m

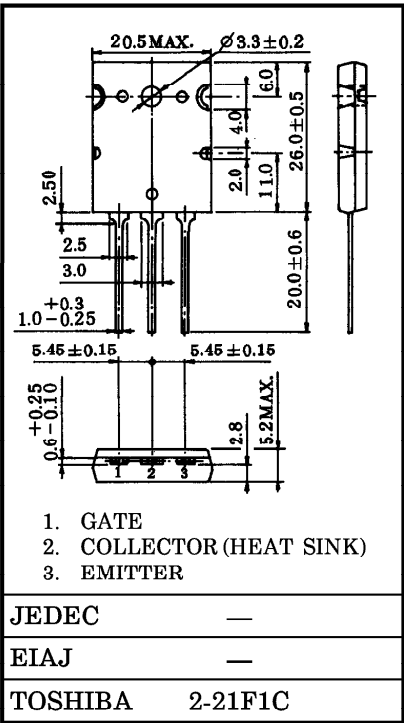

Weight : 9.75g

ELECTRICAL CHARACTERISTIC (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I _{GES}	V _{GE} =±20V, V _{CE} =0	—	—	±500	nA
Collector Cut-Off Current		I _{CES}	V _{CE} =600V, V _{GE} =0	—	—	1.0	mA
Gate-Emitter Cut-off Voltage		V _{GE(OFF)}	I _C =80mA, V _{CE} =5V	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		V _{CE(sat)} (1)	I _C =10A, V _{GE} =15V	—	—	2.0	V
		V _{CE(sat)} (2)	I _C =80A, V _{GE} =15V	—	2.5	3.5	
Input Capacitance		C _{ies}	V _{CE} =10V, V _{GE} =0, f=1MHz	—	5500	—	pF
Switching Time	Rise Time	t _r		—	0.3	0.6	μs
	Turn-on Time	t _{on}		—	0.5	0.8	
	Fall Time	t _f		—	0.25	0.40	
	Turn-off Time	t _{off}		—	0.7	1.0	
Thermal Resistance		R _{th(j-c)}		—	—	0.625	°C/W

961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

