

Driver IC


Laser Diodes Driver IC

Sharp manufactures a series of driver ICs (IR3C01/R3C01/R3C01N, IR3C02A/IR2C02AN) for use as laser diode APC circuits. Using these ICs, the power output of the laser is easily adjusted by means of an external resistance. Specifications are as follows:

IR3C01/IR3C01N, IR3C02A/IR3C02AN

Pin Assignment

IR3C01/IR3C01N			IR3C02A/IR3C02AN	
Pin No.	symbol	Function	Symbol	Function
1	OUT	Out	OUT	Output
2	I _M	Monitor input	GND	Ground
3	V _{AJ}	Output Setting	I _M	Monitor Input
4	V _{EE}	(-) Power Supply	V _{EE}	(-)Power Supply
5	V _{IN}	Control Input (on/off)	V _{IN}	Control Input (on/off)
6	GND	Ground	S _O	Operating signal output
7	C _p	Phase Compensation	C _p	Phase Compensation
8	V _{CC}	(+) Power Supply	V _{CC}	(+) Power Supply

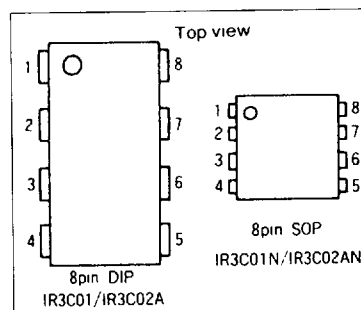

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Remarks	Ratings		Units
			IR3C01/IR3C01N	IR3C02A/IR3C02AN	
Supply Voltage	V _{CC}		13	10	V
Supply Voltage	V _{EE}		-20	-10	V
Output Current	I _O	Pin ①	170	-170	mA
Control Input Voltage	V _{IN}	Pin ⑤	-0.2 to 6	-0.2 to V _{CC}	V
Power Dissipation	P _C	Ta ≤ 25°C	450/330	550/500	mW
Derating ratio	—	Ta > 25°C	4.6/3.3	4.4	mW/°C
Operating Temperature	Topr		-20 to +85	-30 to +85	°C
Storage Temperature	Tstg		-55 to +150	-55 to +150	°C
Output Current	I _{OS}	Pin ⑥ with laser on	—	5	mA
Output Applied Voltage	V _{OS}	Pin ⑥ with laser off	—	-0.2~V _{CC}	V

Electrical Characteristics

(a) IR3C01/IR3C01N

(V_{CC}=-5V, V_{EE}=-12V, Ta=25°C)

Parameter	Symbol	Condition	Rating			Units
			MIN	TYP	MAX	
Operating Supply Voltage	V _{CC}	—	4.5	5.0	5.5	V
	V _{EE}	—	-10.0	-12.0	-13.2	
Circuit Current	I _{CC}	V _{IN} =0V	—	2.8	4.5	mA
	I _{EE OFF}	V _{IN} =0V	—	-1.3	-2.1	
	I _{EE ON}	V _{IN} =5V	—	-2.8	-4.6	
Output Voltage	V _{OUT}	I _O =150mA	3.6	4.1	—	V
		I _O =100mA	3.7	4.2	—	
		I _O =20mA	3.8	4.3	—	
Control Input Voltage (H)	V _{INH}	—	2.0	—	6	V
Control Input Voltage (L)	V _{INL}	—	0	—	0.8	V
Control Input Current	I _{IN}	V _{IN} =5V	—	0.3	0.5	mA
Monitor Input pin Voltage	V _M	—	—	-6.9	—	V
Output Adjustment Pin Voltage	V _{AJ}	(V _{AJ} -V _{EE})	3.5	3.9	4.3	V
Power Supply Ripple Reduction	ΔI _O /ΔV _{CC}	f=120Hz	—	4×10 ⁻⁵	—	A/V
	ΔI _O /ΔV _{EE}	—	—	1×10 ⁻⁶	—	

(b) IR3C02A/IR3C02AN

(V_{CC}=5V, V_{EE}=-5V, Ta=25°C)

Parameter		Symbol	Condition	Rating			Units
				MIN	TYP	MAX	
Operating Supply Voltage		V _{CC}	—	4.5	5.0	5.5	V
		V _{EE}	—	-4.5	-5.0	-5.5	
Circuit Current		I _{CC ON}	V _{IN} =5V	—	2.8	5.0	mA
		I _{EE ON}		—	-2.0	-5.0	
		I _{CC OFF}	V _{IN} =0V	—	4.1	7.5	
		I _{EE OFF}		—	-2.1	-3.8	
Output Voltage		V _{OUT}	I _O =-150mA	3.7	4.1	—	V
			I _O =-100mA	3.8	4.2	—	
			I _O =-20mA	3.9	4.3	—	
Output Voltage		V _{OS1}	I _{OS} =0mA	V _{IN} =0V	—	0.05	V
		V _{OS2}	I _{OS} =2mA		—	—	
Control	H	V _{IN} H	V _O V _{OS} L→H	1.43	1.53	1.63	V
Input	L	V _{IN} L	V _O V _{OS} H→L	1.23	1.33	1.43	
Voltage	Hysteresis	V _{IN} HY	(V _{INH} -V _{INL})	—	200	—	mV
Control Input Current		I _{IN}	—	—	-0.3	—	μA
Monitor Input Pin Voltage		V	—	1.16	1.22	1.28	V
Monitor Input Pin Current		I	—	—	-0.3	-5	μA
Photo output power supply change		ΔI _P /ΔV _{CC}	V _{EE} =-5V, V _{CC} =5V±10%	—	0.02	—	% / V
		ΔI _P /ΔV _{EE}	V _{CC} =-5V, V _{EE} =-5V±10%	—	0.2	—	
Photo output changing width		ΔI _P /I _{PO}	T _a =-30 to +85°C	—	0.2	—	%

Common Data

Fig. 94-1 Optical Power Output Dependence of Far-Field Pattern

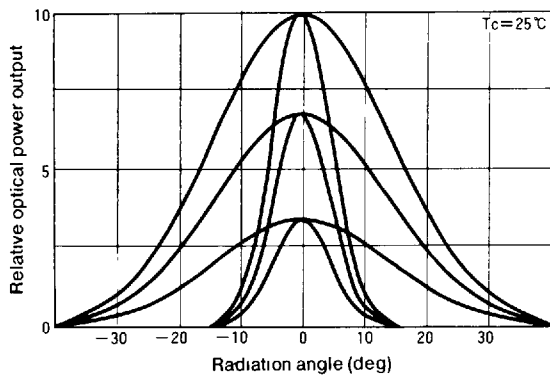


Fig. 94-2 Polarization Ratio vs. Optical Power Output (LT026 series, LT023 series)

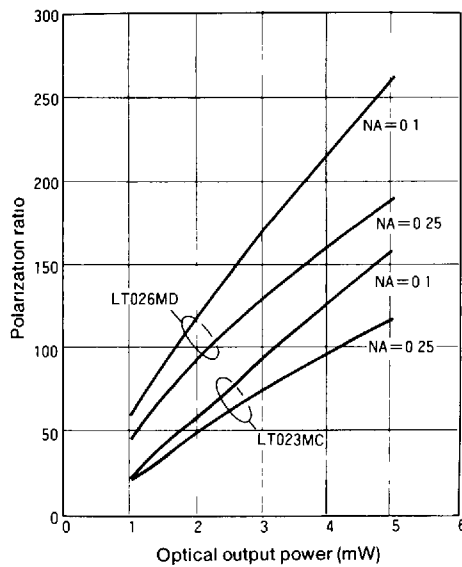


Fig. 94-3 Polarization Ratio vs. Optical Power Output (LT024 series, LT015 series)

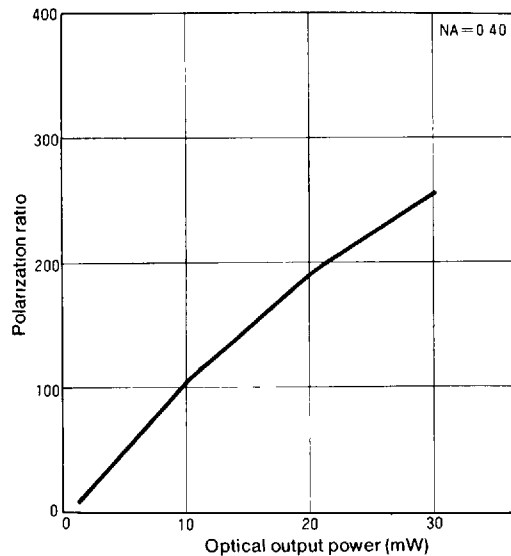


Fig. 94-4 Coupling Efficiency


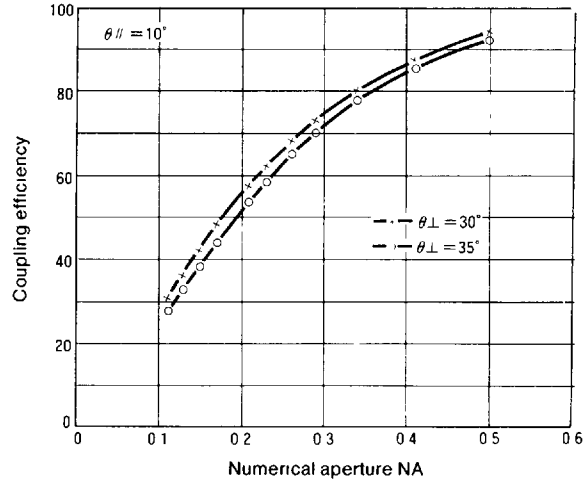


Fig. 94-5 Frequency Response

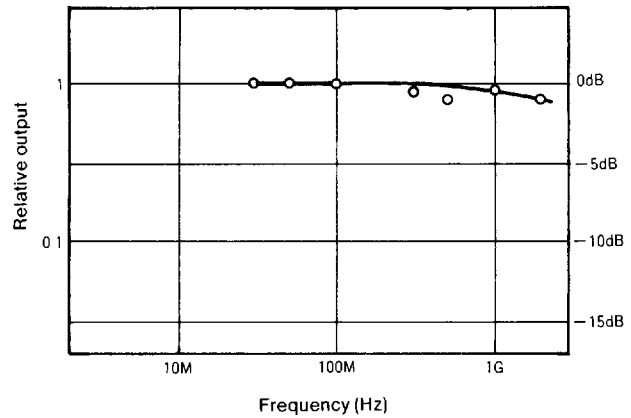

Note All data on this page is typical only, and is not intended as a specification. The shapes of these curves can be used as a general reference, but the actual characteristics will vary from device to device.

Built-in PIN Photodiode Characteristics

Fig. 95-1 Photodiode Frequency Response Characteristic


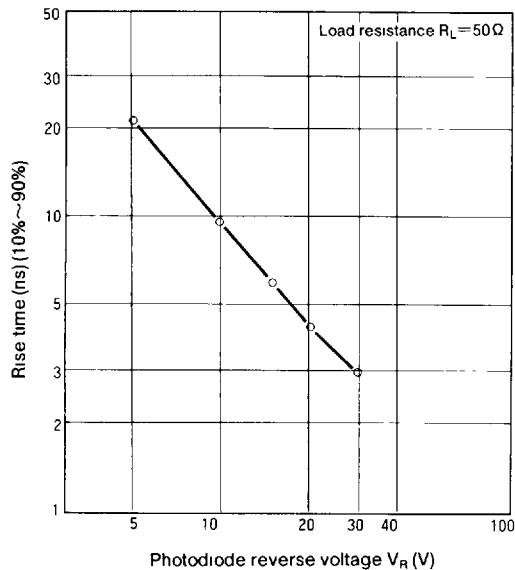


Fig. 95-2 Photodiode Temperature Characteristic

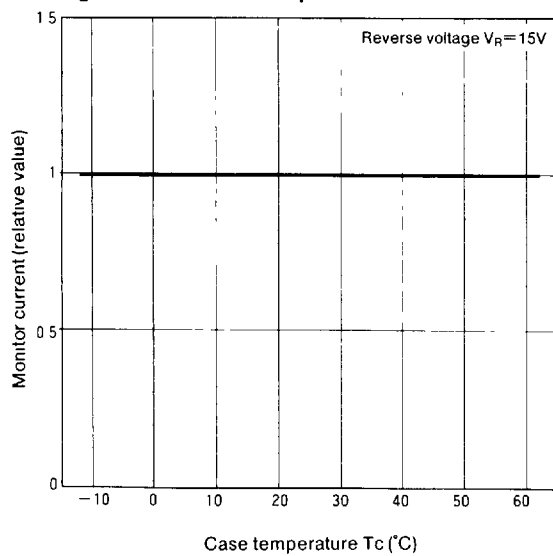

Note All data on this page is typical only, and is not intended as a specification. The shapes of these curves can be used as a general reference, but the actual characteristics will vary from device to device.

Unit: mm

Fig. 98-2 Low-Cap Type (D Type)

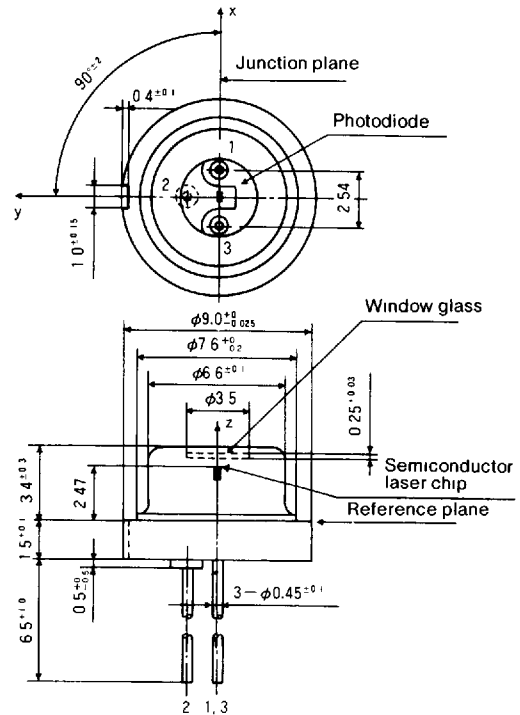


Fig. 98-4 Compact Package Type (S Type)

