

International
IOR Rectifier
IRFK4H150, IRFK4J150
Isolated Base Power HEX-pak™ Assembly - Parallel Chip Configuration

- High Current Capability.
- UL recognised E78996.
- Electrically Isolated Base Plate.
- Easy Assembly into Equipment.

Description

The HEX-pak™ utilises the well-proven HEXFET™ die, combining low on-state resistance with high transconductance. These superior technology die are assembled by state of the art techniques into the TO-240 package, featuring 2.5kV rms isolation and solid M5 screw connections. The small footprint means the package is highly suited to power applications where space is a premium. Available in two versions, IRFK.H... for fast switching and IRFK.J... for oscillation sensitive applications.

$$V_{DS} = 100V$$

$$R_{DS(on)} = 14m\Omega$$

$$I_D = 145A$$

Absolute Maximum Rating

	Parameter	Max.	Units
$I_D @ T_C=25^\circ C$	Continuous Drain Current	137	A
$I_D @ T_C=100^\circ C$	Continuous Drain Current	90	A
I_{DM}	Pulse Drain Current	580	A ①
$P_D @ T_C=25^\circ C$	Maximum Power Dissipation	500	W
V_{GS}	Gate-to-Source Voltage	20	V
V_{INS}	R.M.S. Isolation Voltage, circuit to base	2.5	kV
T_J	Operating Junction Temperature Range	-40 to 150	°C
T_{STG}	Storage Temperature Range	-40 to 150	°C

Thermal and Mechanical Specifications

	Parameter	Min.	Typ.	Max.	Units
R_{thJC}	Junction-to-Case	-	-	0.25	K/W ②
R_{thCS}	Case-to-Sink, smooth & greased surface	-	0.1	-	K/W
T	Mounting Torque +10%				③
	HEXpak to Heatsink	-	5	-	Nm
	Busbar to HEXpak	-	3	-	Nm
wt	Approximate Weight	-	140	-	g
		-	5	-	oz

Notes:

- ① - Repetitive Rating: Pulse width limited by maximum junction temperature see figure 8.
- ② - Per Module.
- ③ - A mounting compound is recommended and the torque should be rechecked after a period of three hours to allow for the spread of the compound.

IRFK4H150, IRFK4J150



Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (Unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$B_{V_{DS}}$	Drain-to-Source Breakdown voltage	100	-	-	V	$V_{GS}=0V, I_D=1.0mA$
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance	-	11	14	m Ω	$V_{GS}=10V, I_D=45A$
$I_{D(on)}$	On-State Drain Current	145	-	-	A	$V_{DS} > I_{D(on)} \times R_{DS(on)} \text{ max.}, V_{GS}=10V$
$V_{GS(th)}$	Gate Threshold Voltage	2.0	-	4.0	V	$V_{DS}=V_{GS}, I_D=1.0mA$
g_{fs}	Forward Transconductance ④	50	80	-	S	$V_{DS} > 50V, I_D=90A$
I_{DSS}	Zero Gate Voltage Drain Current	-	-	1.0	mA	$V_{DS}=V_{GS} \text{ max.}, V_{GS}=0V$
		-	-	4.0	mA	$V_{GS}=10V, T_C=125^\circ\text{C}, V_{DS}=V_{DS} \text{ max.} \times 0.8$
I_{GSS}	Gate-to-Source Leakage Forward	-	-	400	nA	$V_{GS}=20V$
I_{GSS}	Gate-to-Source Leakage Reverse	-	-	-400	nA	$V_{GS}=-20V$
Q_{g1}	Total Gate Charge	-	370	500	nC	$I_D=145A, V_{GS}=10V$
Q_{gs}	Gate-to-Source Charge	-	75	100	nC	$V_{DS}=V_{DS} \text{ max.} \times 0.8$
Q_{gd}	Gate-to-Drain ("Miller") Charge	-	175	250	nC	
$t_{d(on)}$	Turn-on Delay Time	IRFK4H150	-	65	ns	$V_{DD}=40V, I_D=90A, V_{GS}=10V, R_{SOURCE}=3.3\Omega$
		IRFK4J150	-	75	ns	
		IRFK4H150	-	350	ns	
t_r	Rise Time	IRFK4J150	-	400	ns	
		IRFK4H150	-	230	ns	
$t_{d(off)}$	Turn-off Delay Time	IRFK4H150	-	130	ns	
		IRFK4J150	-	160	ns	
t_f	Fall Time	-	-	-	ns	
L_{DS}	Drain-to-Source Inductance	-	18	-	nH	
C_{iss}	Input Capacitance	-	10.4	-	nF	$V_{GS}=0V, V_{DS}=25V, f=1.0MHz$
C_{oss}	Output Capacitance	-	4.0	-	nF	
C_{rss}	Reverse Transfer Capacitance	-	1.0	-	nF	
	Linear Derating Factor	-	-	4	W/K	

Source-Drain Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	-	-	150	A	
I_{SM}	Pulsed Source Current (Body Diode)	-	-	500	A	
V_{SD}	Diode Forward Voltage	-	-	2.5	V	$V_{GS}=0V, I_S=145A, T_C=25^\circ\text{C}$
t_{rr}	Reverse Recovery Time	90	190	390	ns	$di/dt=400A/\mu s, T_J=150^\circ\text{C}$
Q_{rr}	Reverse Recovered Charge	3.0	6.4	14.0	μC	$I_S=145A$

Notes:

④ - Pulse Width $\leq 300\mu s$; Duty cycle $\leq 2\%$.



IRFK4H150, IRFK4J150




Fig 1. Typical Output Characteristics,
 $T_C = 25^\circ\text{C}$




Fig 2. Typical Output Characteristics,
 $T_C = 150^\circ\text{C}$




Fig 3. Typical Transfer Characteristics

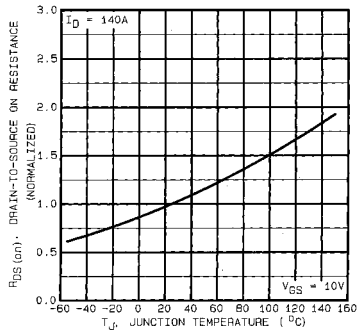


Fig 4. Normalized On-Resistance Vs. Temperature

IRFK4H150.IRFK4J150

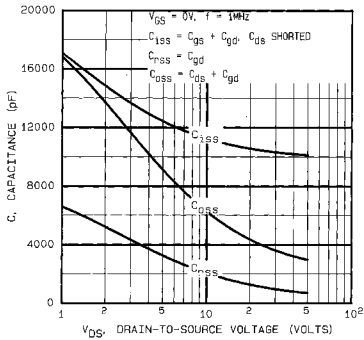


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage




Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage




Fig 7. Typical Source-Drain Diode Forward Voltage

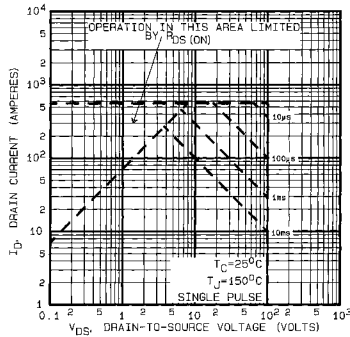


Fig 8. Maximum Safe Operating Area

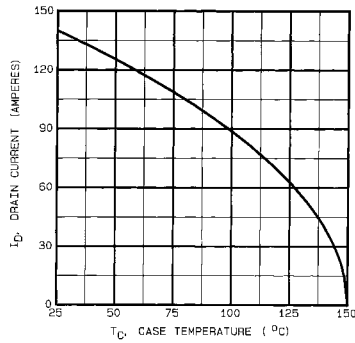


Fig 9. Maximum Drain Current Vs. Case Temperature

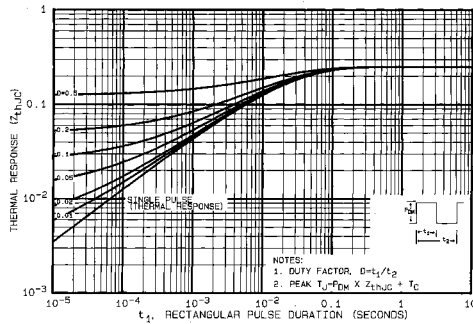


Fig 10. Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRFK4H150.IRFB4J150

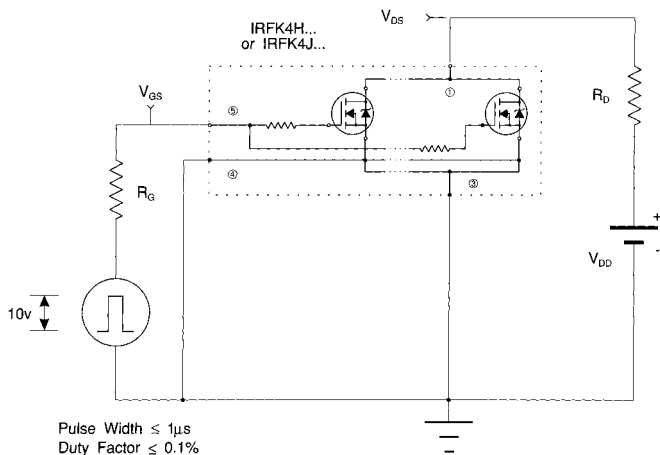


Fig 11a. Switching Time Test Circuit








Fig 11b. Switching Time Waveforms

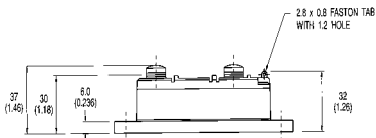

IRFK4H150,IRFK4J150

Circuit Configuration and Outline

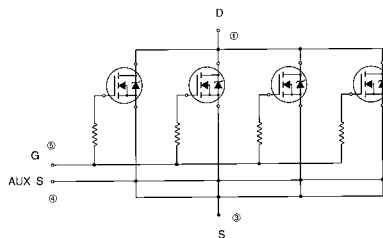


NOTE:
DEVICE IS SUPPLIED WITH
AUXILIARY LEADS 200(7.87) LONG

All dimensions in millimetres (inches)

IRFK4H150.IRFK4J150



Part Numbering

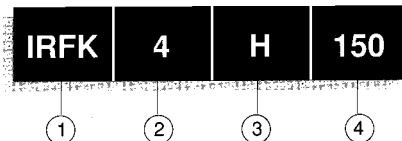

1. - HEX-pak Module.
2. - Number of HEXFETs in parallel.
3. - H - Fast switching.
J - Oscillation resistant for sensitive applications.
4. - Voltage code:-
 - 054 - 60V
 - 150 - 100V
 - 250 - 200V
 - 350 - 400V
 - 450 - 500V
 - C50 - 600V

WORLD HEADQUARTERS: 233 Kansas St., **EL SEGUNDO**, California 90245, USA. Tel:(213) 772-2000. Tlx.854464. Fax:(213) 772-9028
EUROPEAN HEADQUARTERS: Hurst Green, **OXTED**, Surrey RH19 9BB, UK. Tel:(0883) 713215. Tlx.95219. Fax:(0883) 714234.

CANADA: 101 Bentley St., Markham, **ONTARIO** L3R 3U1. Tel:(416) 475-1897. Tlx.06-966-650. Fax:(416) 475-8801
CZECHOSLOVAKIA: Macurova 19/1585, Box 30, 145 00 **PRAGUE**. Tel:(2) 792 6831. Fax:(2) 792 6831.
DENMARK: P.O. Box 70, Kroghshøjvej 51, DK-2880 **BAGSVAERD**. Tel: (45) 44 37 71 50. Fax: (45) 44 37 71 52.
FRANCE: 123 Rue de Petit Vaux, 91360 **EPINAY sur ORGE**. Tel:(1)64.54.83.29. Tlx.600943. Fax:(1)64.54.83.30.
FINLAND: Bultskogsvägen 19, 02580 **SJUNDEÅ** St. Tel:(0) 262 8144. Fax:(0) 262 8150.
GERMANY: Sachburgstr. 157, D-6360 **RAD HOMBURG**. Tel:(61)72 37066. Tlx.410404. Fax:(61)72 37065.
HUNGARY: Szent Istvan Park 15, H-1137 **BUDAPEST**. Tel:(1) 1298 822. Fax:(1) 1298 822.
HONG KONG: 202 Peter Building, 60 Queens Road Central, **HONG KONG**. Tel:(85) 252 36355. Fax: (85) 284 52908.
ITALY: Via Liguria 48, 10071 Borgaro, **TORINO**. Tel:(011)470 14 84. Tlx.221257. Fax:(011)470 42 90.
 Via Zucca 8, 20017 **RHO MILANO**. Tel:(02)90 50 36 50. Fax:(02)90 50 36 55.
 Via Arno 1, 40139 **BOLOGNA**. Tel:(051)49 33 07. Fax:(051)49 54 80.
JAPAN: 31 Greenacre, 5 Union Park, Khar (W), **BOMBAY** 400 052. Tel:(022)535026/533779/540242. Tlx.011-71481.
K & H Bldg. 2F, 3-30-4 Nishi-ikebukuro, Toshima-ku, TOKYO, Japan 171. Tel: (03)983 0641. Fax:(03)983 0642.
SINGAPORE: HEX 10-01 Fortune Centre, 190 Middle Road, **SINGAPORE** 0718. Tel:(65)336 3922/337 4695/336 6285. Fax: (65)337 4692.
SWEDEN: Box. 85, S-182 12 Vallingby 1, **STOCKHOLM**. Tel:(08)877035. Fax:(08)874242.
SWITZERLAND: **CH-8032 ZÜRICH**, Kirchenweg 5. Tel:(01)389 8702/8988. Fax:(01)383 5109/2379.
U.S.A.:
Central Zone: 2401 Plum Grove Road, Suite 111, **PALATINE**, IL60067. Tel:(312)397-0002. Fax:(312)397-0114.
Eastern Zone: 71 Grand Avenue, **PALISADES PARK**, NJ07650. Tel:(201)943-4554. Fax:(201)943-8754.
Southern Zone: 800 Office Plaza Blvd., Suite 401, **KISSIMMEE**, FL32743. Tel:(407)933-2383. Fax:(407)933-2293.
Western Zone: 222 Kansas Street, **EL SEGUNDO**, CA90245. Tel:(213)607-8986. Fax:(213)640-6533.

Sales Offices, Agents and Distributors in Major Cities throughout the World.

In the interest of product improvement INTERNATIONAL RECTIFIER reserves the right to change specifications at any time without notice.

MJW/1/92