


# IRFP260N

HEXFET® Power MOSFET

- Advanced Process Technology
- Dynamic dv/dt Rating
- 175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated
- Ease of Paralleling
- Simple Drive Requirements




$V_{DS} = 200V$   
 $R_{DS(on)} = 0.04\Omega$   
 $I_D = 50A$

## Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The TO-247 package is preferred for commercial-industrial applications where higher power levels preclude the use of TO-220 devices. The TO-247 is similar but superior to the earlier TO-218 package because of its isolated mounting hole.



## Absolute Maximum Ratings

|                           | Parameter                                | Max.                   | Units |
|---------------------------|------------------------------------------|------------------------|-------|
| $I_D @ T_C = 25^\circ C$  | Continuous Drain Current, $V_{GS} @ 10V$ | 50                     | A     |
| $I_D @ T_C = 100^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 35                     |       |
| $I_{DM}$                  | Pulsed Drain Current ①                   | 200                    |       |
| $P_D @ T_C = 25^\circ C$  | Power Dissipation                        | 300                    | W     |
|                           | Linear Derating Factor                   | 2.0                    | W/°C  |
| $V_{GS}$                  | Gate-to-Source Voltage                   | $\pm 20$               | V     |
| $E_{AS}$                  | Single Pulse Avalanche Energy②           | 560                    | mJ    |
| $I_{AR}$                  | Avalanche Current①                       | 50                     | A     |
| $E_{AR}$                  | Repetitive Avalanche Energy①             | 30                     | mJ    |
| dv/dt                     | Peak Diode Recovery dv/dt ③              | 10                     | V/ns  |
| $T_J$                     | Operating Junction and                   | -55 to +175            | °C    |
| $T_{STG}$                 | Storage Temperature Range                |                        |       |
|                           | Soldering Temperature, for 10 seconds    | 300 (1.6mm from case ) |       |
|                           | Mounting torque, 6-32 or M3 screw        | 10 lbf•in (1.1N•m)     |       |

## Thermal Resistance


|                 | Parameter                           | Typ. | Max. | Units |
|-----------------|-------------------------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case                    | —    | 0.50 | °C/W  |
| $R_{\theta CS}$ | Case-to-Sink, Flat, Greased Surface | 0.24 | —    |       |
| $R_{\theta JA}$ | Junction-to-Ambient                 | —    | 40   |       |

# IRFP260N

International  
**IR** Rectifier

## Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                                 | Parameter                            | Min. | Typ. | Max. | Units    | Conditions                                                                  |
|---------------------------------|--------------------------------------|------|------|------|----------|-----------------------------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 200  | —    | —    | V        | $V_{GS} = 0V, I_D = 250\mu A$                                               |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.26 | —    | V/°C     | Reference to $25^\circ\text{C}$ , $I_D = 1mA$                               |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —    | 0.04 | $\Omega$ | $V_{GS} = 10V, I_D = 28A$ ④                                                 |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 2.0  | —    | 4.0  | V        | $V_{DS} = V_{GS}, I_D = 250\mu A$                                           |
| $g_{fs}$                        | Forward Transconductance             | 27   | —    | —    | S        | $V_{DS} = 50V, I_D = 28A$ ④                                                 |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —    | 25   | $\mu A$  | $V_{DS} = 200V, V_{GS} = 0V$                                                |
|                                 |                                      | —    | —    | 250  |          | $V_{DS} = 160V, V_{GS} = 0V, T_J = 150^\circ\text{C}$                       |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA       | $V_{GS} = 20V$                                                              |
|                                 | Gate-to-Source Reverse Leakage       | —    | —    | -100 |          | $V_{GS} = -20V$                                                             |
| $Q_g$                           | Total Gate Charge                    | —    | —    | 234  | nC       | $I_D = 28A$                                                                 |
| $Q_{gs}$                        | Gate-to-Source Charge                | —    | —    | 38   |          | $V_{DS} = 160V$                                                             |
| $Q_{gd}$                        | Gate-to-Drain ("Miller") Charge      | —    | —    | 110  |          | $V_{GS} = 10V$ ④                                                            |
| $t_{d(on)}$                     | Turn-On Delay Time                   | —    | 17   | —    | ns       | $V_{DD} = 100V$                                                             |
| $t_r$                           | Rise Time                            | —    | 60   | —    |          | $I_D = 28A$                                                                 |
| $t_{d(off)}$                    | Turn-Off Delay Time                  | —    | 55   | —    |          | $R_G = 1.8\Omega$                                                           |
| $t_f$                           | Fall Time                            | —    | 48   | —    |          | $V_{GS} = 10V$ ④                                                            |
| $L_D$                           | Internal Drain Inductance            | —    | 5.0  | —    | nH       | Between lead,<br>6mm (0.25in.)<br>from package<br>and center of die contact |
| $L_S$                           | Internal Source Inductance           | —    | 13   | —    |          |                                                                             |
| $C_{iss}$                       | Input Capacitance                    | —    | 4057 | —    | pF       | $V_{GS} = 0V$                                                               |
| $C_{oss}$                       | Output Capacitance                   | —    | 603  | —    |          | $V_{DS} = 25V$                                                              |
| $C_{rss}$                       | Reverse Transfer Capacitance         | —    | 161  | —    |          | $f = 1.0MHz$                                                                |




## Source-Drain Ratings and Characteristics


|          | Parameter                                 | Min.                                                                        | Typ. | Max. | Units   | Conditions                                                              |
|----------|-------------------------------------------|-----------------------------------------------------------------------------|------|------|---------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —                                                                           | —    | 50   | A       | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode)①    | —                                                                           | —    | 200  |         |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —                                                                           | —    | 1.3  | V       | $T_J = 25^\circ\text{C}, I_S = 28A, V_{GS} = 0V$ ④                      |
| $t_{rr}$ | Reverse Recovery Time                     | —                                                                           | 268  | 402  | ns      | $T_J = 25^\circ\text{C}, I_F = 28A$                                     |
| $Q_{rr}$ | Reverse Recovery Charge                   | —                                                                           | 1.9  | 2.8  | $\mu C$ | $di/dt = 100A/\mu s$ ④                                                  |
| $t_{on}$ | Forward Turn-On Time                      | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |         |                                                                         |

### Notes:


- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 1.5mH$   
 $R_G = 25\Omega$ ,  $I_{AS} = 28A$ .
- ③  $I_{SD} \leq 28A$ ,  $di/dt \leq 486A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  
 $T_J \leq 175^\circ\text{C}$
- ④ Pulse width  $\leq 400\mu s$ ; duty cycle  $\leq 2\%$ .

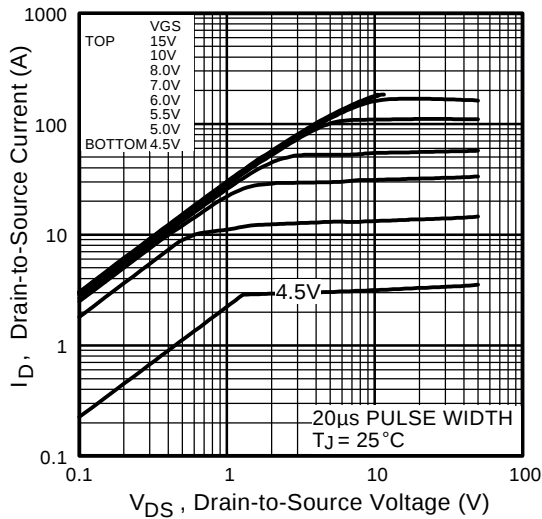


**Fig 1.** Typical Output Characteristics

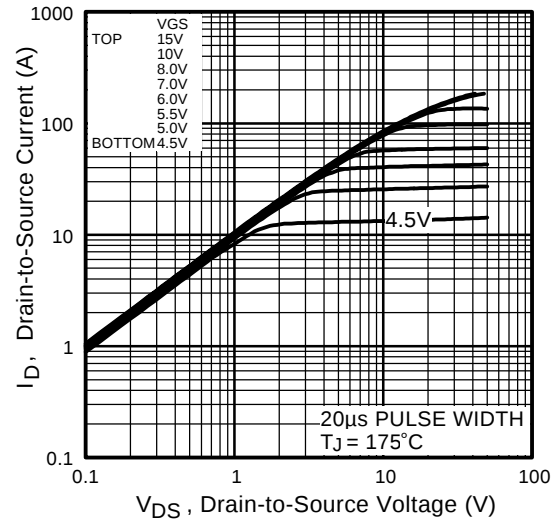

**Fig 2.** Typical Output Characteristics

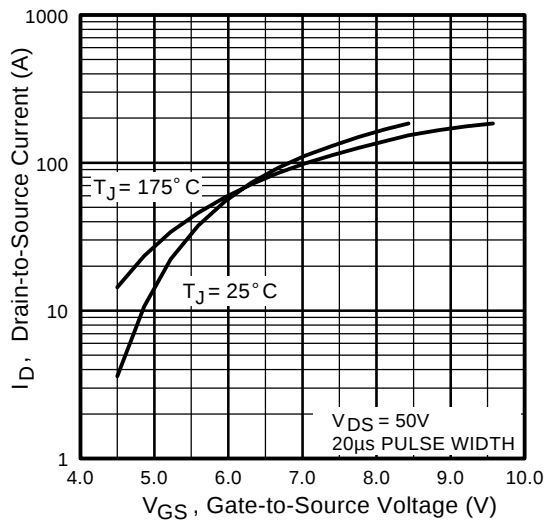





**Fig 3.** Typical Transfer Characteristics

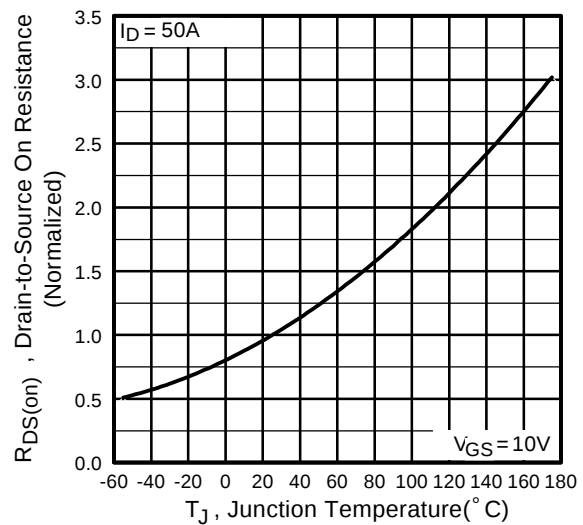


**Fig 4.** Normalized On-Resistance Vs. Temperature


# IRFP260N

International  
**IR** Rectifier

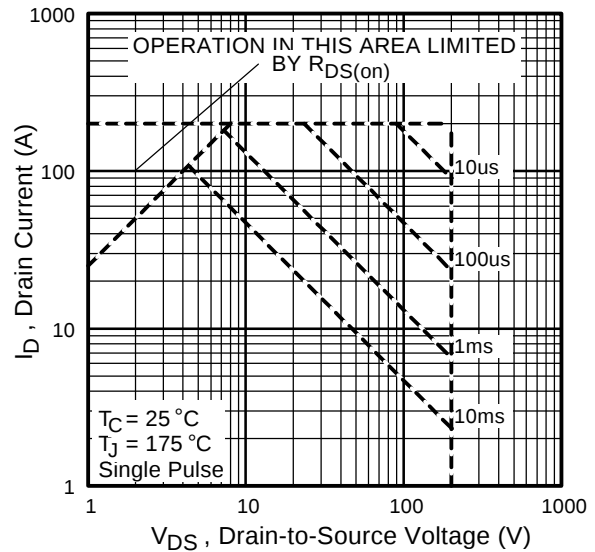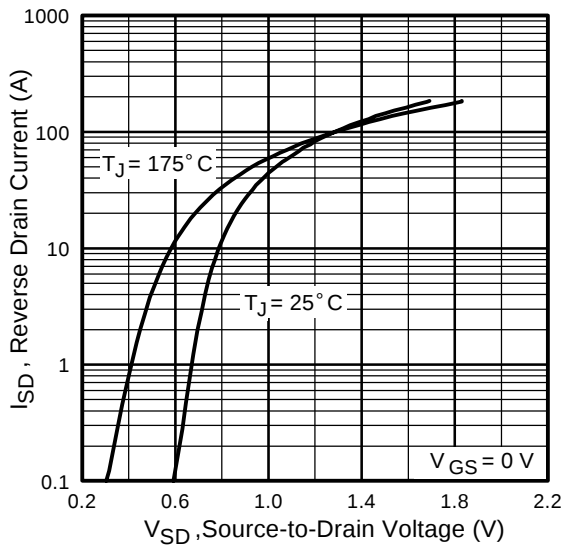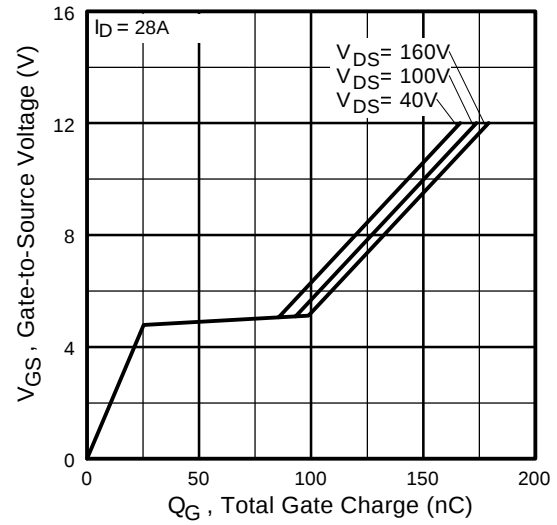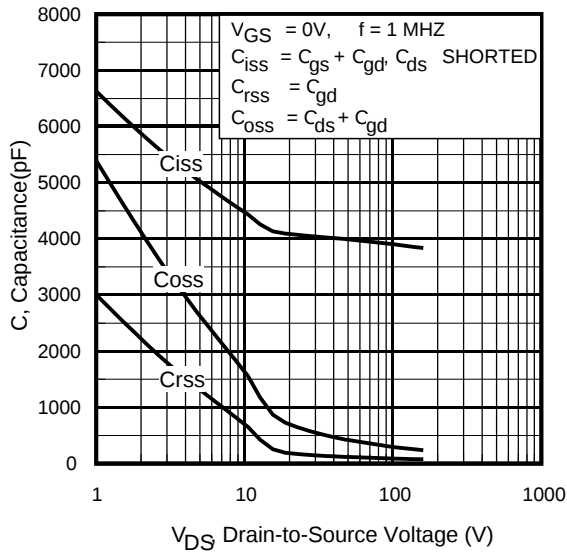


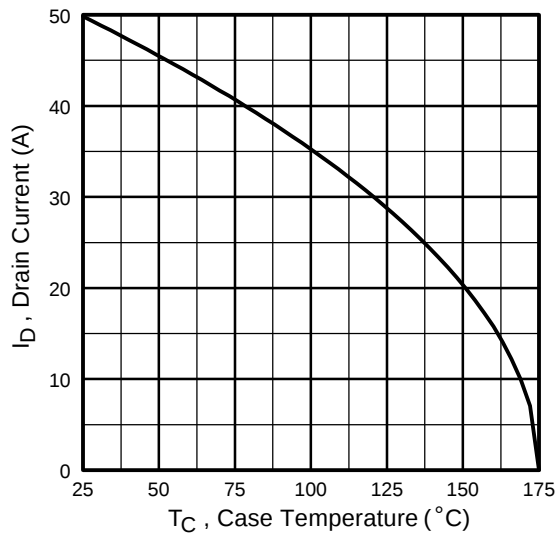


**Fig 9.** Maximum Drain Current Vs. Case Temperature

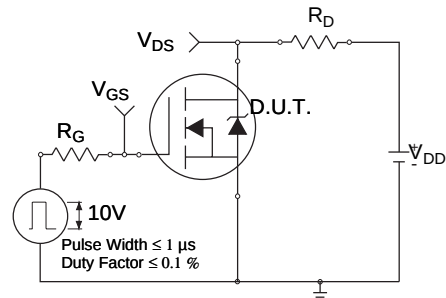

**Fig 10a.** Switching Time Test Circuit

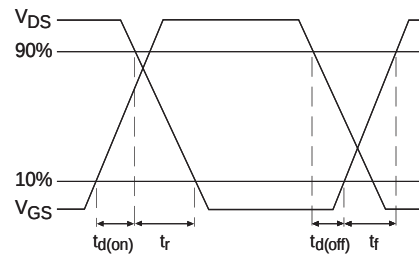


**Fig 10b.** Switching Time Waveforms

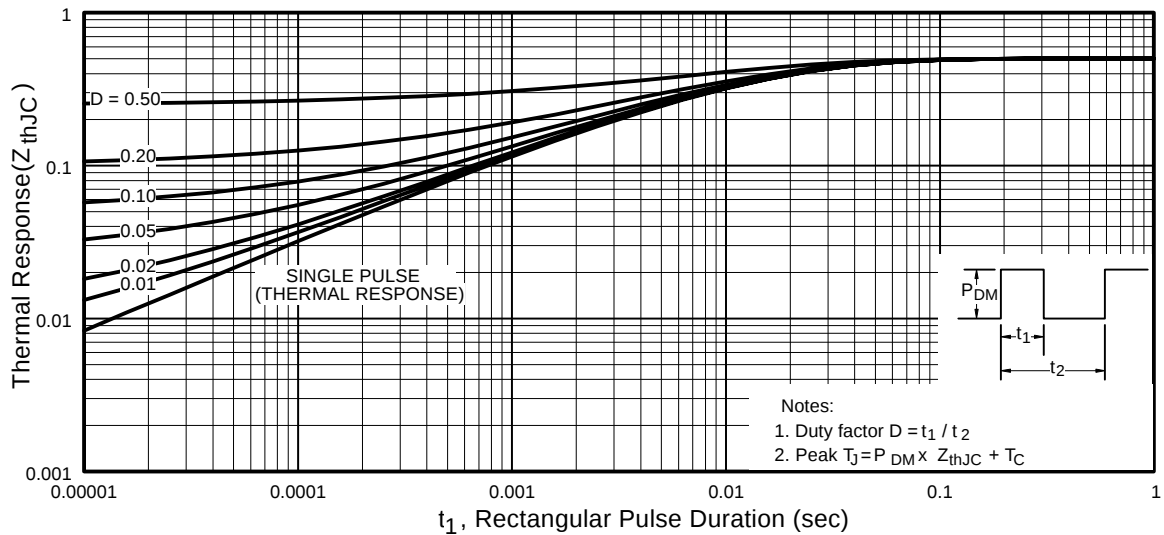


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

# IRFP260N


International  
**IR** Rectifier

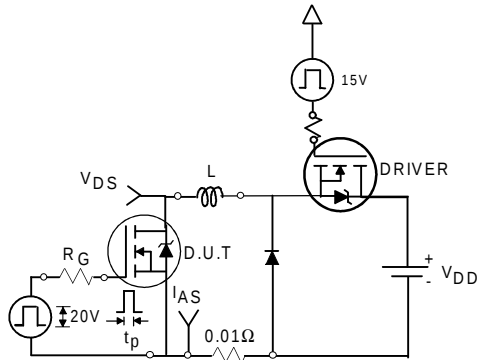


**Fig 12a.** Unclamped Inductive Test Circuit

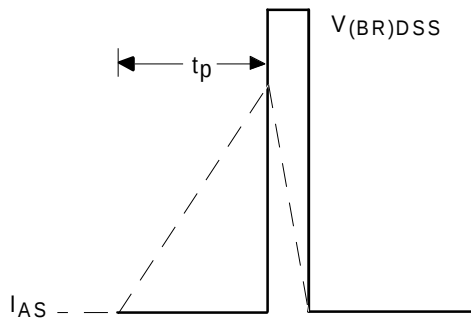


**Fig 12b.** Unclamped Inductive Waveforms

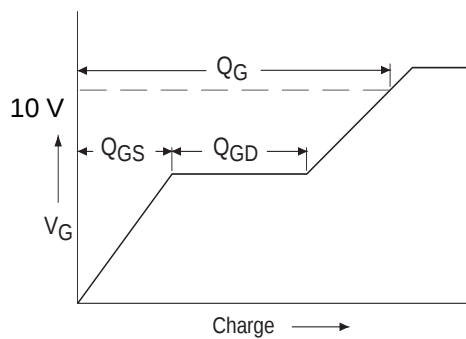

**Fig 13a.** Basic Gate Charge Waveform


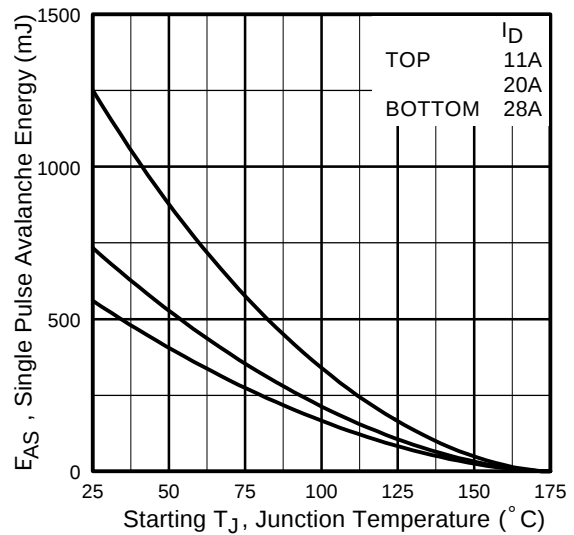


**Fig 12c.** Maximum Avalanche Energy Vs. Drain Current

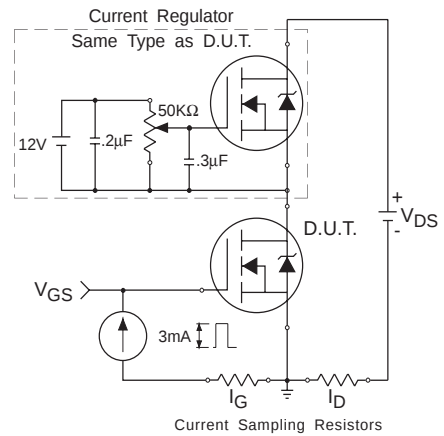

**Fig 13b.** Gate Charge Test Circuit

## Peak Diode Recovery dv/dt Test Circuit

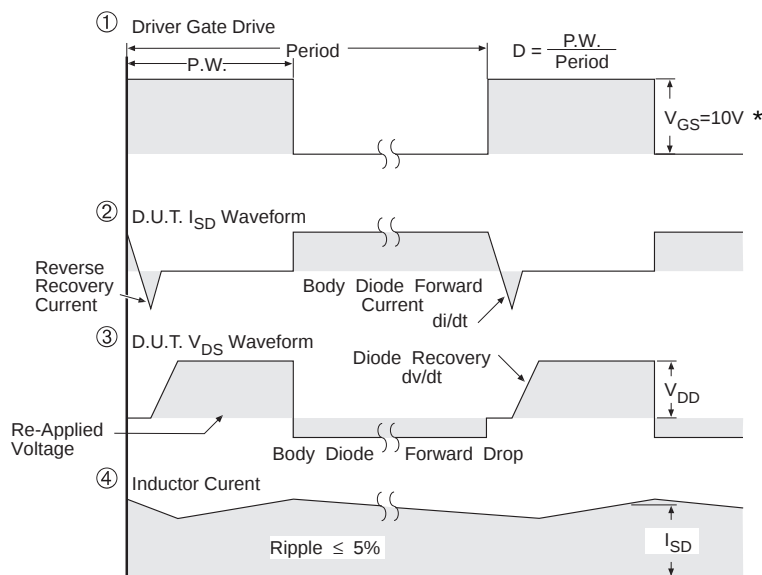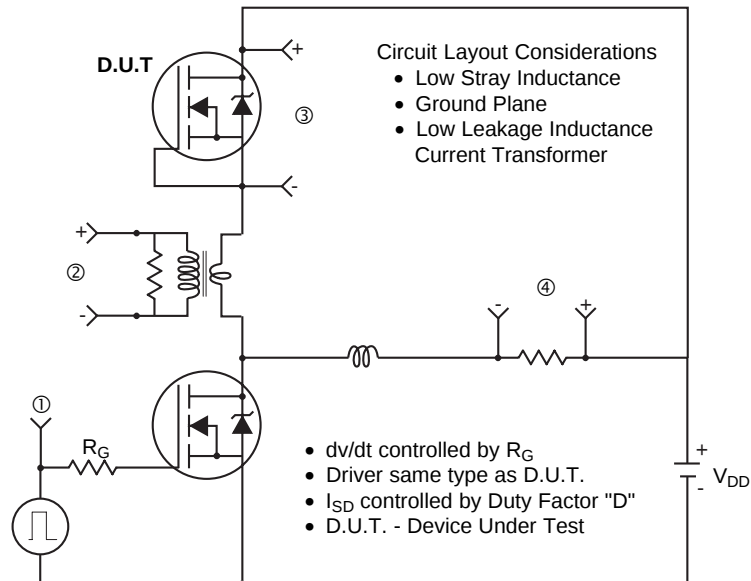

\*  $V_{GS} = 5V$  for Logic Level Devices

**Fig 14.** For N-Channel HEXFETS

International  
**IOR** Rectifier

## TO-247AC Outline


Technical drawing of a mechanical part, likely a valve body, showing front and side views with dimensions in inches and millimeters. The drawing includes section lines A-A, B-B, and C-C. Key dimensions include overall width of 15.90 inches, overall height of 20.30 inches, and various hole diameters and positions. The part has three vertical ports at the bottom and two horizontal ports on the sides.

**Dimensions (inches / millimeters):**

- Overall Width: 15.90 (.626)
- Overall Height: 20.30 (.800)
- Section A-A: 3.65 (.143) (hole diameter), 3.55 (.140) (hole diameter)
- Section B-B: 15.30 (.602) (width), 15.90 (.626) (width)
- Section C-C: 4.30 (.170) (height), 3.70 (.145) (height)
- Port Dimensions: 2X 5.50 (.217) (height), 2X 4.50 (.177) (height)
- Port Spacing: 2.40 (.094) (width), 2.00 (.079) (width)
- Port Diameter: 3X 1.40 (.056) (diameter), 1.00 (.039) (diameter)
- Port Spacing (Bottom): 3.40 (.133) (width), 3.00 (.118) (width)
- Port Diameter (Bottom): 2X 5.45 (.215) (diameter)

**Material and Surface Finish:**

- Material: 0.25 (.010) M (Machined)
- Surface Finish: C (Clean)
- Surface Finish: A (Smooth)

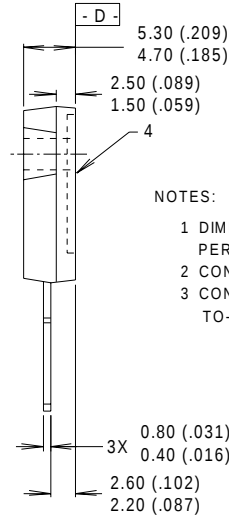

1 DIMENSIONING & TOLERANCING  
PER ANSI Y14.5M, 1982.

2 CONTROLLING DIMENSION : INCH.

3 CONFORMS TO JEDEC OUTLINE  
TO-247-AC.

1 - GATE  
2 - DRAIN  
3 - SOURCE  
4 - DRAIN

**TO-247AC**

INTERNATIONAL  
RECTIFIER  
LOGO

IRFPE30

**IR**

3A1Q 9302

PART NUMBER

DATE CODE  
(YYWW)  
YY = YEAR  
WW WEEK

ASSEMBLY  
LOT CODE

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
**IR EUROPEAN REGIONAL CENTRE:** 439/445 Godstone Rd, Whyteleafe, Surrey CR3 0BL, UK Tel: ++ 44 (0)20 8645 8000  
**IR CANADA:** 15 Lincoln Court, Brampton, Ontario L6T3Z2, Tel: (905) 453 2200  
**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 (0) 6172 96590  
**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 011 451 0111  
**IR JAPAN:** K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo 171 Tel: 81 (0)3 3983 0086  
**IR SOUTHEAST ASIA:** 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994 Tel: ++ 65 (0)838 4630  
**IR TAIWAN:** 16 Fl. Suite D. 207, Sec. 2, Tun Haw South Road, Taipei, 10673 Tel: 886-(0)2 2377 9936  
*Data and specifications subject to change without notice. 10/00*