

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

### POW-R-BLOK™ Dual SCR Isolated Module 700 Amperes / Up to 1800 Volts




#### Description:

Powerex Dual SCR Modules are designed for use in applications requiring phase control and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink.

#### Features:

- Electrically Isolated Heatsinking
- Compression Bonded Elements
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability

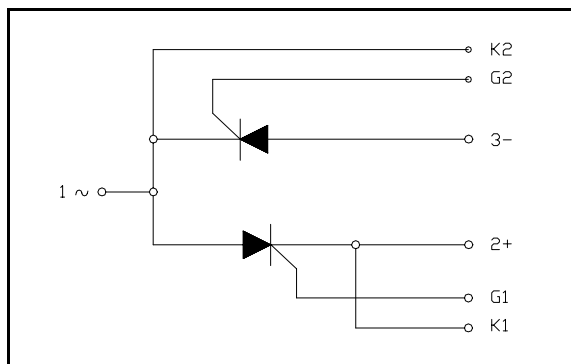

#### Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

#### Applications:

- Bridge Circuits
- AC & DC Motor Drives
- Motor Soft Starters
- Battery Supplies
- Power Supplies
- Large IGBT Circuit Front Ends

#### Ordering Information:

Select the complete eight-digit module part number from the table below.

Example: PD431807 is a 1800 Volt, 700A Average Dual SCR Isolated POW-R-BLOK™ Module

| Type | Voltage<br>Volts (x100) | Current<br>Amperes<br>(x100) |
|------|-------------------------|------------------------------|
| PD43 | 12                      | 07                           |
|      | 14                      |                              |
|      | 16                      |                              |
|      | 18                      |                              |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual SCR Isolated Module**  
**700 Amperes / Up to 1800 Volts**

**Absolute Maximum Ratings**

| Characteristics                                                             | Conditions                                          | Symbol                | Units                                 |
|-----------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|---------------------------------------|
| Repetitive Peak Forward and Reverse Blocking Voltage                        |                                                     | $V_{DRM}$ & $V_{RRM}$ | Up to 1800 V                          |
| Non-Repetitive Peak Blocking Voltage<br>( $t < 5$ msec)                     |                                                     | $V_{RSM}$             | $V_{RRM} + 100V$ V                    |
| RMS Current AC Switch Configuration<br>(180° Conduction)                    | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(RMS)}$          | 1775 A                                |
|                                                                             | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(RMS)}$          | 1665 A                                |
|                                                                             | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(RMS)}$          | <b>1550</b> A                         |
|                                                                             | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(RMS)}$          | 1440 A                                |
| RMS Current Per SCR<br>(180° Conduction)                                    | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(RMS)}$          | 1256 A                                |
|                                                                             | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(RMS)}$          | 1178 A                                |
|                                                                             | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(RMS)}$          | <b>1100</b> A                         |
|                                                                             | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(RMS)}$          | 1020 A                                |
| Average Forward Current Per SCR<br>(180° Conduction)                        | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(AV)}$           | 800 A                                 |
|                                                                             | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(AV)}$           | 750 A                                 |
|                                                                             | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(AV)}$           | <b>700</b> A                          |
|                                                                             | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(AV)}$           | 650 A                                 |
| Peak One Cycle Surge Current, Non-Repetitive<br>$T_j = 25C, V_r = 0$        | 60 Hz                                               | $I_{TSM}$             | 69,000 A                              |
|                                                                             | 50 Hz                                               | $I_{TSM}$             | 63,000 A                              |
| Peak One Cycle Surge Current, Non-Repetitive<br>$T_j = 25C, V_r = V_{rrm}$  | 60 Hz                                               | $I_{TSM}$             | 46,000 A                              |
|                                                                             | 50 Hz                                               | $I_{TSM}$             | 42,000 A                              |
| Peak One Cycle Surge Current, Non-Repetitive<br>$T_j = 125C, V_r = 0$       | 60 Hz                                               | $I_{TSM}$             | 60,000 A                              |
|                                                                             | 50 Hz                                               | $I_{TSM}$             | 54,750 A                              |
| Peak One Cycle Surge Current, Non-Repetitive<br>$T_j = 125C, V_r = V_{rrm}$ | 60 Hz                                               | $I_{TSM}$             | 40,000 A                              |
|                                                                             | 50 Hz                                               | $I_{TSM}$             | 36,500 A                              |
| Peak Three Cycle Surge Current, Non-Repetitive                              | 60 Hz, $T_j = 125C, V_r = V_{rrm}$                  | $I_{TSM}$             | 32,100 A                              |
| Peak Ten Cycle Surge Current, Non-Repetitive                                | 60 Hz, $T_j = 125C, V_r = V_{rrm}$                  | $I_{TSM}$             | 25,200 A                              |
| $I^2t$ for Fusing for One Cycle<br>$T_j = 125C, V_r = V_{rrm}$              | 8.3 milliseconds                                    | $I^2t$                | $6.60 \times 10^6$ A <sup>2</sup> sec |
|                                                                             | 10 milliseconds                                     | $I^2t$                | $6.66 \times 10^6$ A <sup>2</sup> sec |
| Maximum Rate-of-Rise of On-State Current,<br>(Non-Repetitive)               | Per JEDEC Standard 397 5.2.2.6                      | $di/dt$               | 400 A/ $\mu$ s                        |
| Maximum Rate-of-Rise of On-State Current,<br>(Repetitive)                   | Per JEDEC Standard 397 5.2.2.6                      | $di/dt$               | 150 A/ $\mu$ s                        |
| Operating Temperature                                                       |                                                     | $T_j$                 | -40 to +125 °C                        |
| Storage Temperature                                                         |                                                     | $T_{stg}$             | -40 to +150 °C                        |
| Max. Mounting Torque, M6 Mounting Screw                                     |                                                     |                       | 132 in. – Lb.                         |
|                                                                             |                                                     |                       | 15 Nm                                 |
| Max. Mounting Torque, M10 Terminal Screw                                    |                                                     |                       | 106 in. – Lb.                         |
|                                                                             |                                                     |                       | 12 Nm                                 |
| Module Weight, Typical                                                      |                                                     |                       | 455 g                                 |
|                                                                             |                                                     |                       | 11.75 lb                              |
| V Isolation @ 25C                                                           |                                                     | $V_{rms}$             | 3000 V                                |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual SCR Isolated Module**  
**700 Amperes / Up to 1800 Volts**

### Electrical Characteristics, $T_J=25^\circ\text{C}$ unless otherwise specified

| Characteristics                         | Symbol        | Test Conditions                                                                                                     | Min.                     | Max.                                           | Units           |
|-----------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------|-----------------|
| Repetitive Peak Forward Leakage Current | $I_{DRM}$     | Up to 1800V, $T_J=125^\circ\text{C}$                                                                                |                          | 100                                            | mA              |
| Repetitive Peak Reverse Leakage Current | $I_{RRM}$     | Up to 1800V, $T_J=125^\circ\text{C}$                                                                                |                          | 100                                            | mA              |
| Peak On-State Voltage                   | $V_{TM}$      | $I_{TM}=3000\text{A}$ , $T_J=125^\circ\text{C}$                                                                     |                          | 1.30                                           | V               |
| Threshold Voltage, Low-level            | $V_{(TO)1}$   | $T_J = 125^\circ\text{C}$ , $I = 15\%I_{T(AV)}$ to $\pi I_{T(AV)}$                                                  |                          | 0.703                                          | V               |
| Slope Resistance, Low-level             | $r_{T1}$      |                                                                                                                     |                          | 0.184                                          | $m\Omega$       |
| Threshold Voltage, High-level           | $V_{(TO)2}$   | $T_J = 125^\circ\text{C}$ , $I = \pi I_{T(AV)}$ to $I_{TSM}$                                                        |                          | 1.01                                           | V               |
| Slope Resistance, High-level            | $r_{T2}$      |                                                                                                                     |                          | 0.117                                          | $m\Omega$       |
| $V_{TM}$ Coefficients, Full Range       |               | $T_J = 125^\circ\text{C}$ , $I = 50\text{A}$ to $6\text{kA}$<br><br>$V_{TM} = A + B \ln I + C I + D \text{Sqrt } I$ | A =<br>B =<br>C =<br>D = | 0.7999<br>-4.62 E-02<br>7.33 E-05<br>1.10 E-02 |                 |
| Minimum $dV/dt$                         | $dV/dt$       | Exponential to $0.67V_{DRM}$<br>$T_J=125^\circ\text{C}$ , Gate Open                                                 | 600                      |                                                | $V/\mu\text{s}$ |
| Gate Trigger Current                    | $I_{GT}$      | $T_J=25^\circ\text{C}$ , $V_D=12\text{V}$                                                                           |                          | 200                                            | mA              |
| Gate Trigger Voltage                    | $V_{GT}$      | $T_J=25^\circ\text{C}$ , $V_D=12\text{V}$                                                                           |                          | 3.0                                            | Volts           |
| Non-Triggering Gate Voltage             | $V_{GDM}$     | $T_J=125^\circ\text{C}$ , $V_D= \frac{1}{2} V_{DRM}$                                                                |                          | 0.15                                           | Volts           |
| Holding Current                         | $I_H$         |                                                                                                                     |                          | 300                                            | mA              |
| Peak Forward Gate Current               | $I_{GTM}$     |                                                                                                                     |                          | 4.0                                            | Amp             |
| Peak Reverse Gate Voltage               | $V_{GRM}$     |                                                                                                                     |                          | 5                                              | Volts           |
| Maximum Average Gate Power Dissipation  | $P_{GM(AVE)}$ |                                                                                                                     |                          | 16                                             | Watts           |


### Thermal Characteristics

| Characteristics                             | Symbol           |                                                                                                                                     | Max.                                                                                                             | Units                                                                                    |
|---------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Thermal Resistance, Junction to Case        | $R_{\Theta J-C}$ | Per Module, both conducting<br>Per Junction, both conducting                                                                        | 0.029<br>0.058                                                                                                   | $^\circ\text{C/W}$<br>$^\circ\text{C/W}$                                                 |
| Thermal Impedance Coefficients              | $Z_{\Theta J-C}$ | $Z_{\Theta J-C} = K_1 (1 - \exp(-t/t_1))$<br>$+ K_2 (1 - \exp(-t/t_2))$<br>$+ K_3 (1 - \exp(-t/t_3))$<br>$+ K_4 (1 - \exp(-t/t_4))$ | $K_1 = 5.04 \text{ E-}04$<br>$K_2 = 2.31 \text{ E-}03$<br>$K_3 = 2.83 \text{ E-}03$<br>$K_4 = 5.24 \text{ E-}02$ | $t_1 = 2.47 \text{ E-}03$<br>$t_2 = 4.42 \text{ E-}02$<br>$t_3 = 1.370$<br>$t_4 = 9.668$ |
| Thermal Resistance, Case to Sink Lubricated | $R_{\Theta C-S}$ | Per Module                                                                                                                          | 0.009                                                                                                            | $^\circ\text{C/W}$                                                                       |


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

### Dual SCR Module 700 Amperes / Up to 1800 Volts


Typical On-State Forward Voltage Drop  
( $T_J = 125^\circ\text{C}$ )

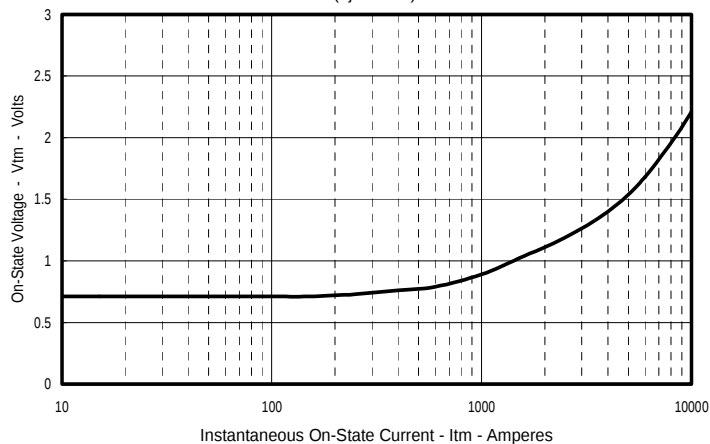


Maximum Transient Thermal Impedance  
(Junction To Case)

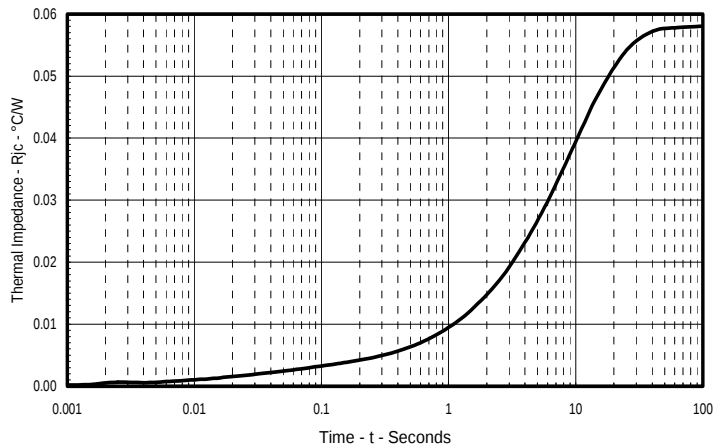


Maximum On-State Power Dissipation  
(Sinusoidal Waveform)

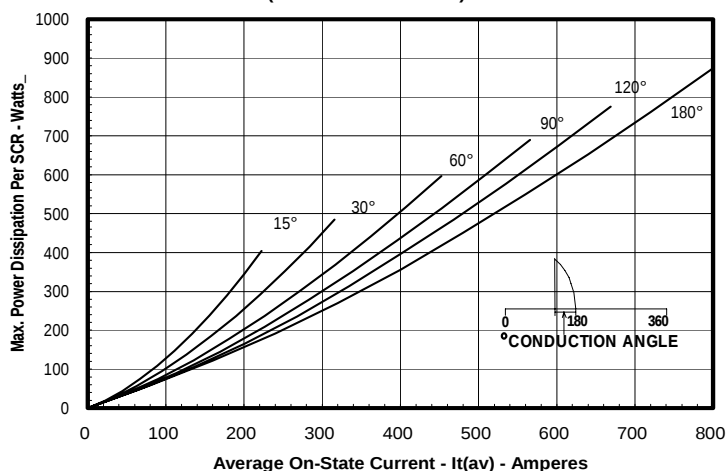


Maximum Allowable Case Temperature  
(Sinusoidal Waveform)

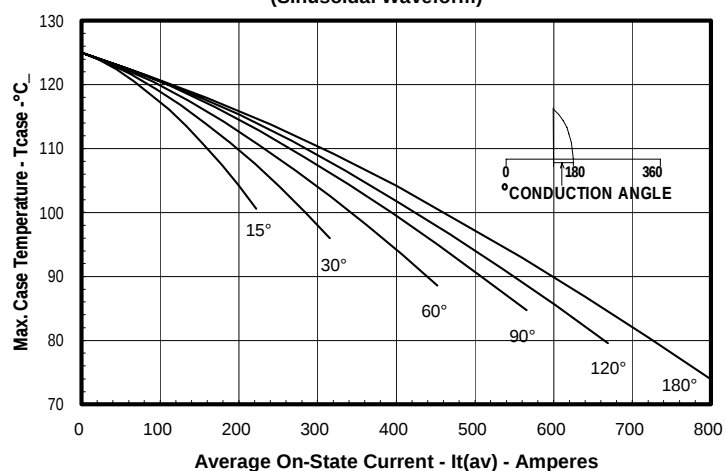

Maximum On-State Power Dissipation  
(Rectangular Waveform)

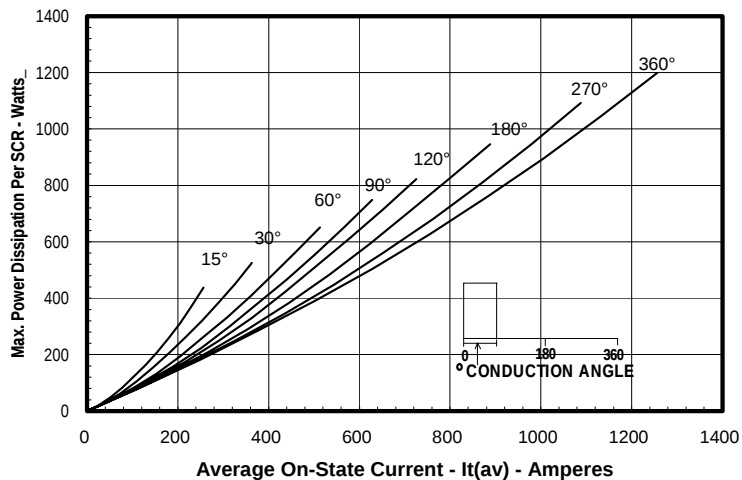

Maximum Allowable Case Temperature  
(Rectangular Waveform)

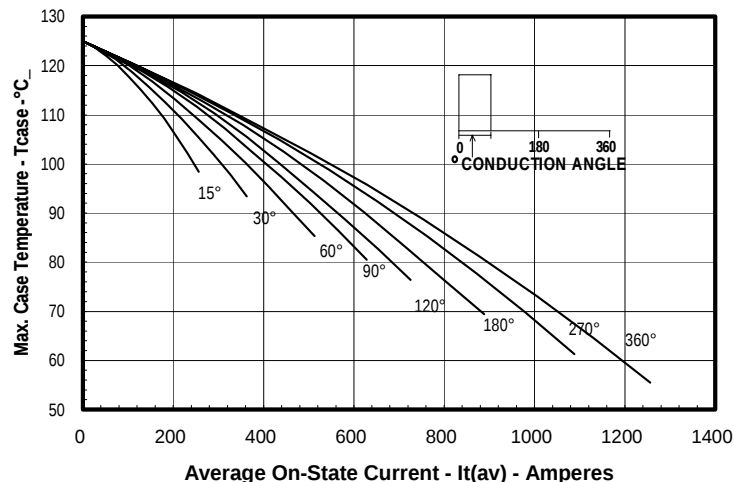

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**Dual SCR Module**  
700 Amperes / Up to 1800 Volts

| DIM. | INCHES | MILLIMETERS |
|------|--------|-------------|
| A    | 7.80   | 198.1       |
| B    | 4.00   | 101.6       |
| C    | 2.68   | 68.1        |
| D    | 6.44   | 163.6       |
| E    | 3.44   | 87.4        |
| F    | .28    | 7.1         |
| G    | 7.31   | 185.7       |
| H    | 7.00   | 177.8       |
| J    | 1.65   | 42          |
| K    | .21    | 5.3         |
| L    | .28    | 7.1         |
| M    | .281   | 7.1         |
| N    | .45    | 11.4        |
| P    | .54    | 13.7        |
| Q    | 5.93   | 150.6       |
| R    | .19    | 4.8         |
| S    | .11    | 2.8         |
| T    | .48    | 12.2        |
| U    | 2.28   | 58          |
| V    | 2.34   | 64.5        |
| W    | 4.93   | 125.2       |
| X    | 3.81   | 96.8        |
| Y    | .03    | .8          |
| Z    | 2.00   | 50.8        |
| AA   | 1.00   | 25.4        |
| BB   | .50    | 12.7        |
| CC   | 1.00   | 25.4        |
| DD   | .406   | 10.3        |
| EE   | 2.87   | 72.9        |
| FF   | .66    | 16.8        |

