

THYRISTOR MODULE

PK(PD,PE,KK)90HB

TOP



UL:E76102 (M)



Power Thyristor/Diode Module **PK90HB** series are designed for various rectifier circuits and power controls. For your circuit application, following internal connections and wide voltage ratings up to 1,600V are available, and electrically isolated mounting base make your mechanical design easy.

- $I_{T(AV)}$ 90A, $I_{T(RMS)}$ 140A, I_{TSM} 1800A
- di/dt 200 A/ μ s
- dv/dt 500V/ μ s

(Applications)

Various rectifiers
AC/DC motor drives
Heater controls
Light dimmers
Static switches

Internal Configurations

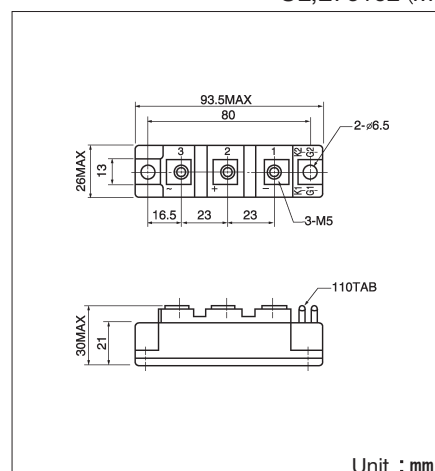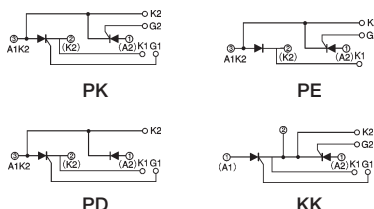

Maximum Ratings

Maximum Ratings

Symbol	Item	Ratings				Unit
		PK90GB40 KK90GB40	PD90GB40 PE90GB40	PK90GB80 KK90GB80	PD90GB80 PE90GB80	
V _{RRM}	* Repetitive Peak Reverse Voltage	1200		1600		V
V _{RSM}	* Non-Repetitive Peak Reverse Voltage	1350		1700		V
V _{DRM}	Repetitive Peak Off-State Voltage	1200		1600		V


Symbol	Item	Conditions	Ratings	Unit	
I _{T (AV)}	* Average On-State Current	Single phase, half wave, 180° conduction, T _c : 88℃	90	A	
I _{T (RMS)}	* R.M.S. On-State Current	Single phase, half wave, 180° conduction, T _c : 88℃	140	A	
I _{TSM}	* Surge On-State Current	1/2 cycle, 50Hz/60Hz, peak Value, non-repetitive	1650/1800	A	
I ² t	* I ² t	Value for one cycle of surge current	15000	A ² S	
P _{GM}	Peak Gate Power Dissipation		10	W	
P _{G (AV)}	Average Gate Power Dissipation		3	W	
I _{FGM}	Peak Gate Current		3	A	
V _{FGM}	Peak Gate Voltage (Forward)		10	V	
V _{RGM}	Peak Gate Voltage (Reverse)		5	V	
di/dt	Critical Rate of Rise of On-State Current	I _G =100mA, T _j =25℃, V _D =1/2 V _{DRM} , dI _G /dt=0.1A/μs	200	A/μs	
V _{ISO}	* Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V	
T _j	* Operating Junction Temperature		−40~+125	℃	
T _{stg}	* Storage Temperature		−40~+125	℃	
	Mounting Torque	Mounting (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	N・m (kgf・cm)
		Terminal (M5)	Recommended Value 1.5~2.5 (15~25)	2.7 (28)	
	Mass			170	g

Electrical Characteristics


Symbol	Item	Conditions	Ratings	Unit
I_{DRM}	Repetitive Peak Off-State Current, max.	at V_{DRM} , single phase, half wave, $T_j=125^\circ\text{C}$	15	mA
I_{RRM}	* Repetitive Peak Reverse Current, max.	at V_{DRM} , single phase, half wave, $T_j=125^\circ\text{C}$	15	mA
V_{TM}	* Peak On-State Voltage, max.	On-State Current 270A, $T_j=125^\circ\text{C}$ Inst. measurement	1.40	V
I_{GT}/V_{GT}	Gate Trigger Current/Voltage, max.	$T_j=25^\circ\text{C}$, $I_T=1\text{A}$, $V_D=6\text{V}$	100/2	mA/V
V_{GD}	Non-Trigger Gate, Voltage. min.	$T_j=125^\circ\text{C}$, $V_D=1/2 V_{DRM}$	0.25	V
t_{gt}	Turn On Time, max.	$I_T=90\text{A}$, $I_G=100\text{mA}$, $T_j=25^\circ\text{C}$, $V_D=1/2 V_{DRM}$, $dI_G/dt=0.1\text{A}/\mu\text{s}$	10	μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	$T_j=125^\circ\text{C}$, $V_D=2/3 V_{DRM}$, Exponential wave.	500	V/ μs
I_H	Holding Current, typ.	$T_j=25^\circ\text{C}$	50	mA
I_L	Latching Current, typ.	$T_j=25^\circ\text{C}$	100	mA
$R_{th}(j-c)$	* Thermal Impedance, max.	Junction to case	0.30	°C/W

*mark : Thyristor and Diode part. No mark : Thyristor part


Gate Characteristics

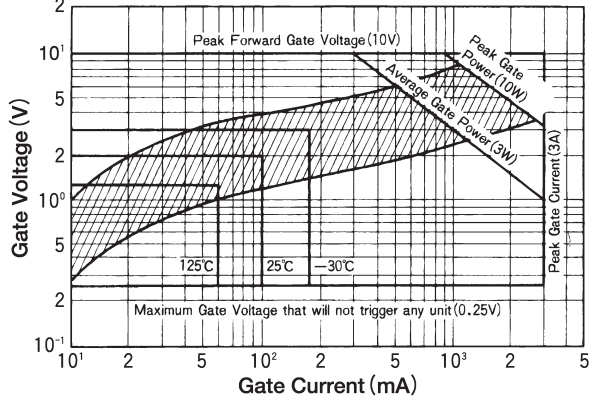


On-State Voltage max

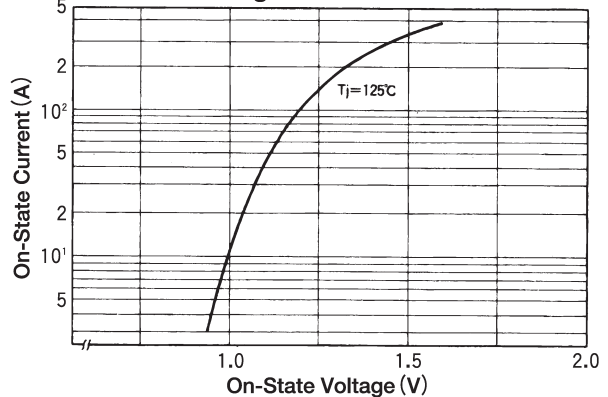


Average On-State Current Vs Power Dissipation (Single phase half wave)

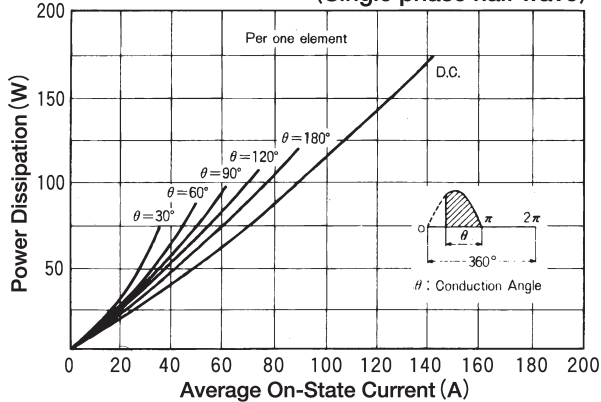


Average On-State Current Vs Maximum Allowable Case Temperature (Single phase half wave)

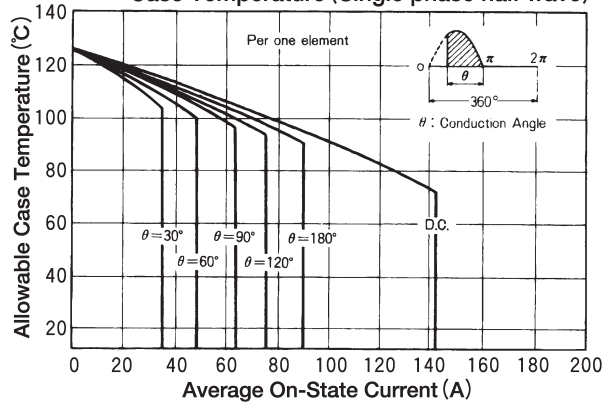

Surge On-State Current Rating (Non-Repetitive)

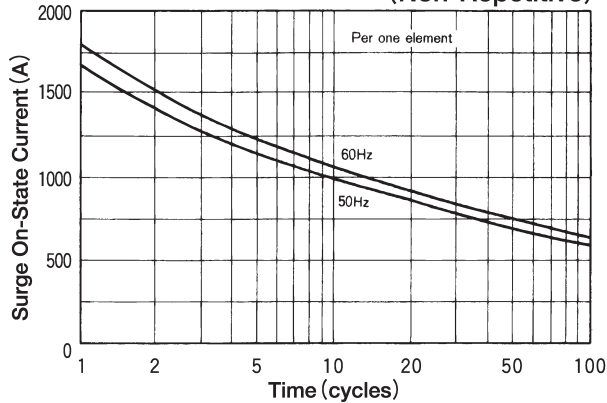


Transient Thermal Impedance

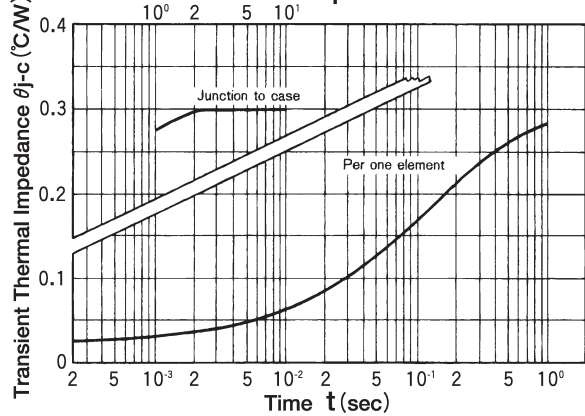

Output Current

W1; Bidirectional connection

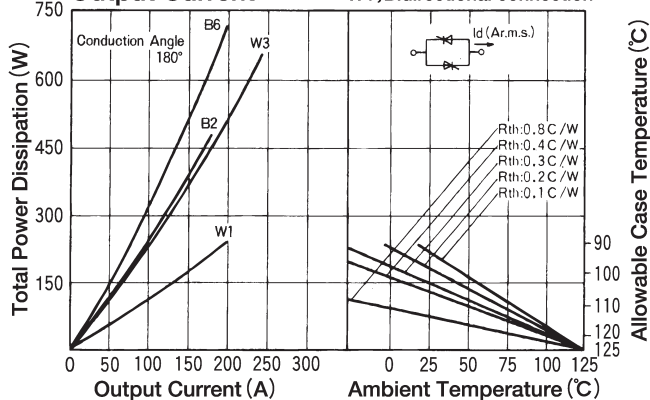

B2; Two Phase bridge connection

