

# RM100HA-XXF

**HIGH SPEED SWITCHING USE  
INSULATED TYPE**

## RM100HA-XXF



- **Idc** DC current ..... **100A**
- **VRRM** Repetitive peak reverse voltage  
..... **600/1000/1200V**
- **trr** Reverse recovery time ..... **0.8μs**
- **Insulated Type**
- **UL Recognized**


Yellow Card No. E80276 (N)  
File No. E80271

## APPLICATION

Free wheel use, Welders

## OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

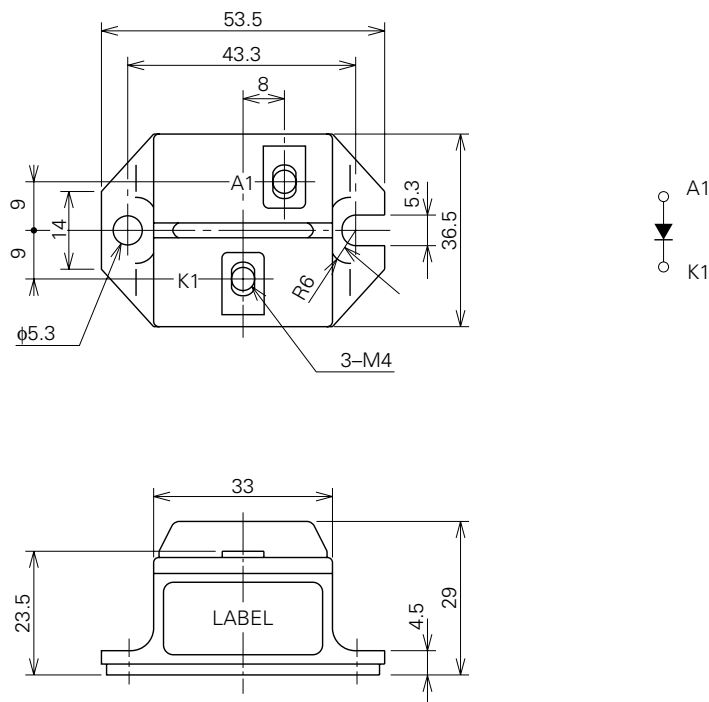

**RM100HA-XXF****HIGH SPEED SWITCHING USE  
INSULATED TYPE****ABSOLUTE MAXIMUM RATINGS** (T<sub>j</sub>=25°C)

| Symbol              | Parameter                           | Voltage class |      |      | Unit |
|---------------------|-------------------------------------|---------------|------|------|------|
|                     |                                     | 12            | 20   | 24   |      |
| V <sub>RRM</sub>    | Repetitive peak reverse voltage     | 600           | 1000 | 1200 | V    |
| V <sub>DRM</sub>    | Non-repetitive peak reverse voltage | 720           | 1100 | 1350 | V    |
| V <sub>R</sub> (DC) | Reverse DC voltage                  | 480           | 800  | 960  | V    |

| Symbol                      | Parameter                              | Conditions                           | Ratings                | Unit             |
|-----------------------------|----------------------------------------|--------------------------------------|------------------------|------------------|
| I <sub>DC</sub>             | DC output current                      | Resistive load, T <sub>C</sub> =75°C | 100                    | A                |
| I <sub>FSM</sub>            | Surge (non-repetitive) forward current | One half cycle at 60Hz, peak value   | 2000                   | A                |
| I <sup>2</sup> <sub>t</sub> | I <sup>2</sup> <sub>t</sub> for fusing | Value for one cycle of surge current | 16.7 × 10 <sup>3</sup> | A <sup>2</sup> s |
| T <sub>j</sub>              | Junction temperature                   |                                      | -40~150                | °C               |
| T <sub>stg</sub>            | Storage temperature                    |                                      | -40~125                | °C               |
| V <sub>iso</sub>            | Isolation voltage                      | Charged part to case                 | 2500                   | V                |
| —                           | Mounting torque                        | Main terminal screw M4               | 0.98~1.47              | N·m              |
|                             |                                        |                                      | 10~15                  | kg·cm            |
|                             |                                        | Mounting screw M5                    | 1.47~1.96              | N·m              |
|                             |                                        |                                      | 15~20                  | kg·cm            |
| —                           | Weight                                 | Typical value                        | 90                     | g                |

**ELECTRICAL CHARACTERISTICS**

| Symbol                | Parameter                  | Test conditions                                                                                       | Limits |      |      | Unit |
|-----------------------|----------------------------|-------------------------------------------------------------------------------------------------------|--------|------|------|------|
|                       |                            |                                                                                                       | Min.   | Typ. | Max. |      |
| I <sub>RRM</sub>      | Repetitive reverse current | T <sub>j</sub> =150°C, V <sub>RRM</sub> applied                                                       | —      | —    | 20   | mA   |
| V <sub>FM</sub>       | Forward voltage            | T <sub>j</sub> =25°C, I <sub>FM</sub> =100A, instantaneous meas.                                      | —      | —    | 1.5  | V    |
| t <sub>rr</sub>       | Reverse recovery time      | I <sub>FM</sub> =100A, di/dt=-200A/μs, V <sub>R</sub> =300/600V* <sup>1</sup> , T <sub>j</sub> =150°C | —      | —    | 0.8  | μs   |
| Q <sub>rr</sub>       | Reverse recovery charge    |                                                                                                       | —      | —    | 60   | μC   |
| R <sub>th</sub> (j-c) | Thermal resistance         | Junction to case                                                                                      | —      | —    | 0.5  | °C/W |
| R <sub>th</sub> (c-f) | Contact thermal resistance | Case to fin, conductive grease applied                                                                | —      | —    | 0.15 | °C/W |


\*<sup>1</sup> 12 class: V<sub>R</sub>=300V    20, 24 class: V<sub>R</sub>=600V

# RM100HA-XXF


HIGH SPEED SWITCHING USE  
INSULATED TYPE

## PERFORMANCE CURVE


MAXIMUM FORWARD CHARACTERISTIC

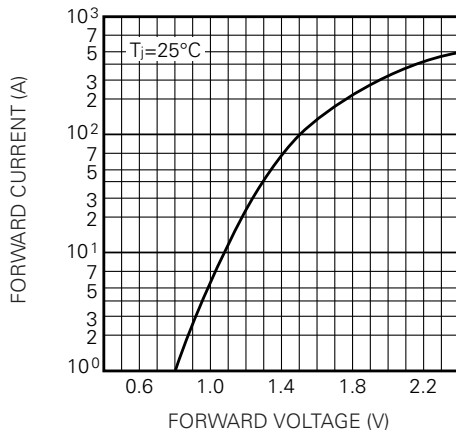


MAXIMUM TRANSIENT THERMAL IMPEDANCE (JUNCTION TO CASE)

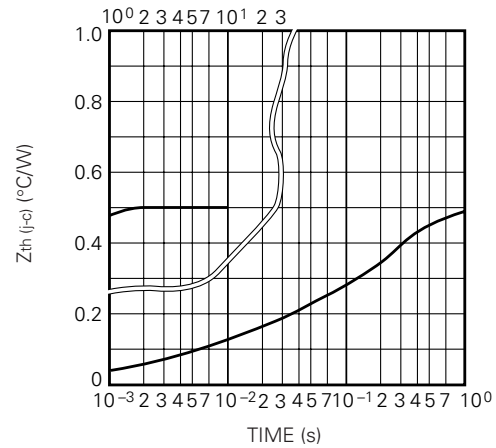

RATED SURGE (NON-REPETITIVE) FORWARD CURRENT

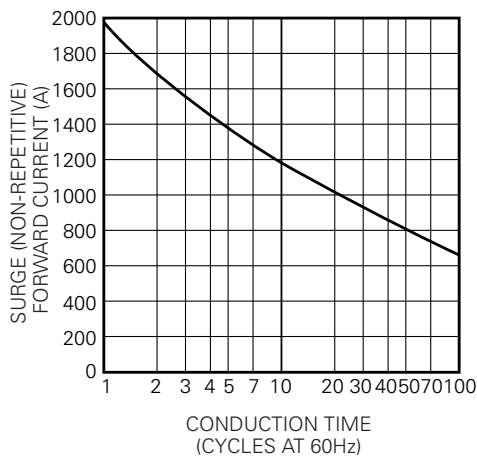

REVERSE RECOVERY CHARACTERISTICS VS. FORWARD CURRENT (TYPICAL)

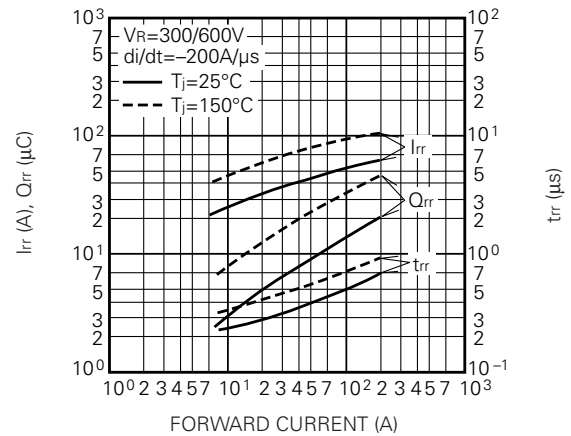

REVERSE RECOVERY CHARACTERISTICS VS.  $-di/dt$  (TYPICAL)

