



WESTCODE

SEMICONDUCTORS


 TECHNICAL
PUBLICATION

DP320

ISSUE 1

May, 1980

Stud-Base Silicon Rectifier Diodes Type PHN/PHR320

320 amperes average: up to 2400 volts V_{RRM}

RATINGS Maximum values at 180°C T_j unless stated otherwise

RATING	CONDITIONS	SYMBOL	
Average forward current	Half sine wave 100°C case temperature	$I_{F(AV)}$	320A
RMS current		$I_{F(RMS)}$	600A
DC forward current		I_F	600A
Peak one-cycle surge (non repetitive)	8.3ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leq 10 \text{ volts} \end{array} \right.$	$I_{FSM(1)}$ $I_{FSM(2)}$	4240A 4664A
Maximum permissible surge energy	8.3ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leq 10 \text{ volts} \end{array} \right.$	$I^2 t (1)$ $I^2 t (2)$	77600A ² s 93896A ² s
	3ms duration $V_R \leq 10 \text{ volts}$		71580A ² s
Case operating temperature		T _C	-30, +180°C
Storage temperature		T _{stg}	-40, +200°C

CHARACTERISTICS Maximum values at 180°C T_j unless stated otherwise

CHARACTERISTIC	CONDITIONS	SYMBOL	
Peak forward voltage drop	At 1000A, I_{FM}	V_{FM}	1.84V
Forward conduction threshold voltage		V_0	1V
Forward conduction slope resistance		r	0.83mΩ
Peak reverse current	At V_{RRM}	I_{RRM}	15mA
Thermal resistance junction to case for a diode with a maximum forward voltage drop characteristic	DC and 180° sine wave 120° rectangular wave	$R_{th(j-c)}$	0.15°C/W 0.16°C/W
Thermal resistance case to heatsink		$R_{th(c-hs)}$	0.04°C/W

VOLTAGE CODE →	16	18	20	22	24				
Repetitive voltage V_{RRM}	1600	1800	2000	2200	2400				
Non-repetitive voltage V_{RSM}	1700	1900	2100	2300	2500				

ORDERING INFORMATION (Please quote device code as explained below — 10 digits)

S	W	●	●	P	H	●	3	2	0
FIXED BASIC CODE	VOLTAGE CODE (see above)			FIXED OUTLINE CODE		STUD POLARITY N = cathode R = anode		FIXED TYPE CODE	

 Typical code SW18PHR320 = 1800V_{RRM} diode with stud anode

In the interest of product improvement, Westcode reserves the right to change specifications at any time without notice.

D P320

34 DE 9709955 0001464 2

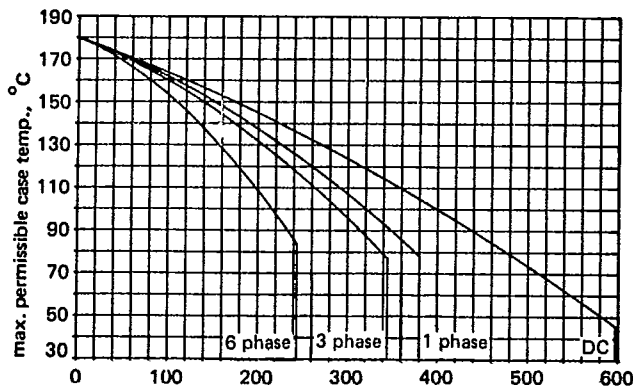


Figure 1 Dissipation and stud temperature
v. mean forward current

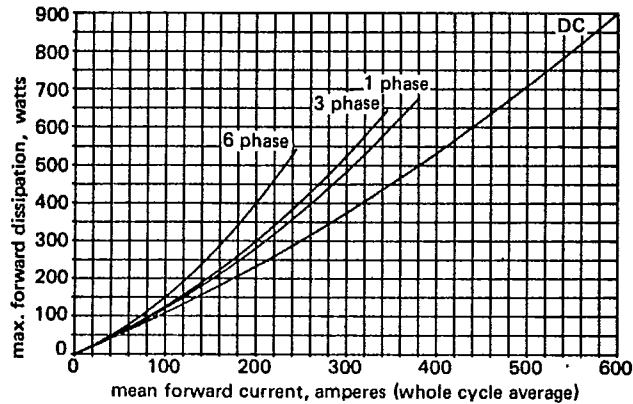


Figure 2 Max. non repetitive surge current
at initial junction temperature 180°C

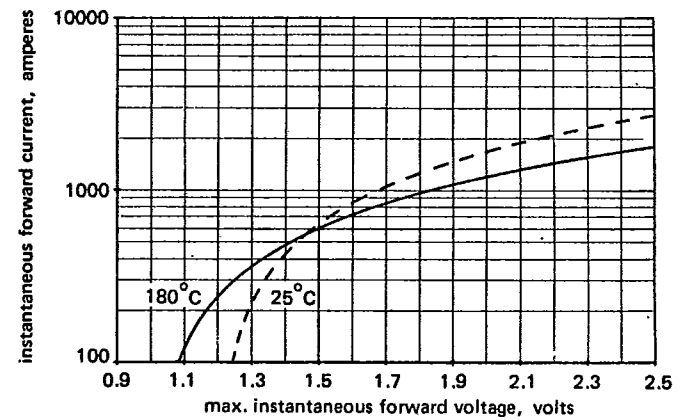


Figure 3 Forward voltage characteristic


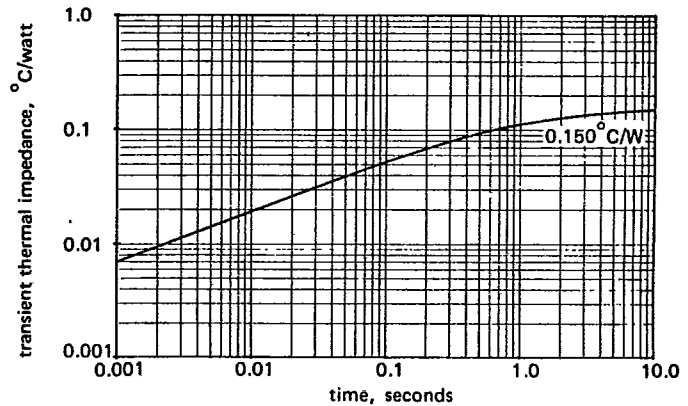


Figure 4 Transient thermal impedance, junction
to case

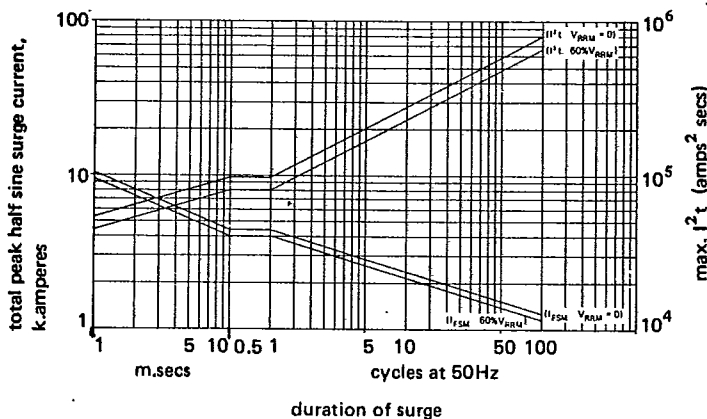

Mounting Torque
2.50 – 2.77 KgM
threads not to be
lubricated
Weight: 250 grams
dimensions
in mm (inches)

Westcode Semiconductors

0-02 Fair Lawn Avenue
Fair Lawn, New Jersey 07410
Telephone: (201) 791-3020
Telex: 130389