
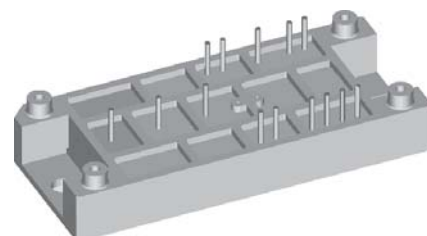


Three Phase Rectifier Bridge with IGBT and Fast Recovery Diode for Braking System

$$\begin{aligned} V_{\text{RRM}} &= 1200/1600 \text{ V} \\ I_{\text{dAVM}} &= 188 \text{ A} \end{aligned}$$

Preliminary Data

V_{RRM}	Type	V_{RRM}	Type
V		V	
1200	VUB 120-12 NO2	1600	VUB 120-16 NO2
1200	VUB 160-12 NO2	1600	VUB 160-16 NO2



Symbol	Conditions	Maximum Ratings		
V_{RRM}		1200/1600	V	
I_{dAVM}	T _C = 80°C, rect., d = 1/3	188	A	
I_{FSM}	T _{VJ} = 45°C, t = 10 ms, V _R = 0 V T _{VJ} = 150°C, t = 10 ms, V _R = 0 V	1100 960	A A	
I²t	T _{VJ} = 45°C, t = 10 ms, V _R = 0 V T _{VJ} = 150°C, t = 10 ms, V _R = 0 V	6050 4610	A A	
P_{tot}	T _C = 25°C per diode	160	W	
		VUB 120	VUB160	
V_{CES}	T _{VJ} = 25°C to 150°C	1200	1200	V
V_{GE}	Continuous	± 20	± 20	V
I_{C25}	T _C = 25°C, DC	140	177	A
I_{C80}	T _C = 80°C, DC	100	125	A
	T _C = 80°C, d = 0.5	95	95	A
I_{CM}	t _p = Pulse width limited by T _{VJM}	280	350	A
P_{tot}	T _C = 25°C	570	690	W
		VUB 120	VUB160	
V_{RRM}		1200	V	
I_{FAV}	T _C = 80°C, rect. d = 1/2	34	A	
I_{FRMS}	T _C = 80°C, rect. d = 1/2	48	A	
I_{FSM}	T _{VJ} = 45°C, t = 10 ms T _{VJ} = 150°C, t = 10 ms	200 180	A A	
P_{tot}	T _C = 25°C	140	W	
		VUB 120	VUB160	
T_{VJ}		-40...+150	°C	
T_{VJM}		150	°C	
T_{stg}		-40...+125	°C	
V_{ISOL}	50/60 Hz t = 1 min I _{ISOL} ≤ 1 mA t = 1 s	3000 3600	V~ V~	
M_d	Mounting torque (M5) (10-32 UNF)	2-2.5 18-22	Nm lb.in.	
d_S	Creep distance on surface	12.7	mm	
d_A	Strike distance in air	9.4	mm	
a	Maximum allowable acceleration	50	m/s ²	
Weight	typ.	80	g	

Features

- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Ultrafast diode
- Convenient package outline
- † UL registered E 72873
- Case and potting UL94 V-0


Applications

- Drive Inverters with brake system

Advantages

- 2 functions in one package
- Easy to mount with two screws
- Suitable for wave soldering
- High temperature and power cycling capability

Dimensions in mm (1 mm = 0.0394")

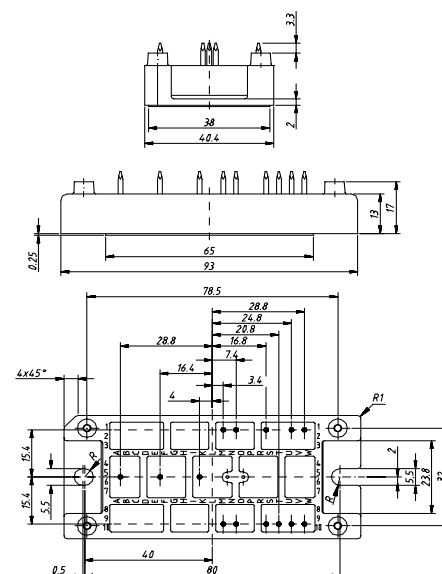

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions.

© 2004 IXYS All rights reserved

Symbol	Conditions	Characteristic Values		
		(T _{VJ} = 25°C, unless otherwise specified)		
		min.	typ.	max.
I_R	Rectifier Diodes	V _R = V _{RRM} , T _{VJ} = 25°C		0.3 mA
		V _R = V _{RRM} , T _{VJ} = 150°C		5 mA
V_F	Rectifier Diodes	I _F = 150 A, T _{VJ} = 25°C		1.46 V
V_{T0}		For power-loss calculations only		0.87 V
r_T	Rectifier Diodes	T _{VJ} = 150°C		4.0 mΩ
R_{thJC}		per diode		0.6 K/W
R_{thCH}	Rectifier Diodes		0.2	K/W
V_{BR(CES)}		V _{GS} = 0 V, I _C = 1 mA	1200	V
V_{GE(th)}	Rectifier Diodes	I _C = 4 mA	4.5	6.5 V
I_{CES}		V _{CE} = 1200 V, T _{VJ} = 25°C		0.2 mA
	Rectifier Diodes	T _{VJ} = 125°C		1 mA
V_{CEsat}		V _{GE} = 15 V, I _C = 50 A VUB 120		2.1 V
		I _C = 75 A VUB 160		2.2 V
t_{SC}	Rectifier Diodes	V _{GE} = 15 V, V _{CE} = 900 V, T _{VJ} = 125°C,		10 μs
(SCSOA)		R _G = 15/10 Ω, non repetitive		
RBSOA	Rectifier Diodes	V _{GE} = 15 V, V _{CE} = 1200 V, T _{VJ} = 125°C,		
		Clamped Inductive load, L = 100 μH		
	Rectifier Diodes	R _G = 15 Ω VUB 120		150 A
		R _G = 10 Ω VUB 160		200 A
C_{ies}	IGBT	V _{CE} = 25 V, f = 1 MHz, V _{GE} = 0 V VUB 120	5.7	nF
		VUB 160	7.4	nF
t_{d(on)}	IGBT	VUB 120	170	ns
t_{d(on)}		VUB 160	330	ns
t_{d(off)}	IGBT	VUB 120	680	ns
t_{d(off)}		VUB 160	750	ns
E_{on}	IGBT	VUB 120	11	mJ
		VUB 160	12	mJ
E_{off}	IGBT	VUB 120	8	mJ
		VUB 160	10	mJ
R_{thJC}	IGBT	VUB 120		0.22 K/W
		VUB 160		0.18 K/W
R_{thCH}	IGBT	VUB 120	0.1	K/W
		VUB 160	0.1	K/W
I_R	Fast Recovery Diode	V _R = V _{RRM} , T _{VJ} = 25°C		0.5 mA
		T _{VJ} = 125°C	0.75	1 mA
V_F	Fast Recovery Diode	I _F = 30 A, T _{VJ} = 25°C		2.7 V
V_{T0}		For power-loss calculations only		1.3 V
r_T	Fast Recovery Diode	T _{VJ} = 150°C		15 mΩ
I_{RM}		I _F = 50 A, -di _F /dt = 100 A/μs, V _R = 100 V	8	12 A
t_{rr}	Fast Recovery Diode	I _F = 1 A, -di _F /dt = 100 A/μs, V _R = 30 V	40	60 ns
R_{thJC}				0.9 K/W
R_{thCH}			0.3	K/W