


International IOR Rectifier

245NQ015(R)

SCHOTTKY RECTIFIER

240 Amp




Major Ratings and Characteristics

Characteristics	245NQ015(R)	Units
$I_{F(AV)}$ Rectangular waveform	240	A
V_{RRM}	15	V
I_{FSM} @ $t_p = 5 \mu s$ sine	20,000	A
V_F @ 240 Apk, $T_J = 75^\circ C$	0.34	V
T_J range	-55 to 125	$^\circ C$

Description/Features

The 245NQ015(R) high current Schottky rectifier module has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125 $^\circ C$ junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 125 $^\circ C$ T_J operation ($V_R < 5V$)
- Unique high power, Half-Pak module
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

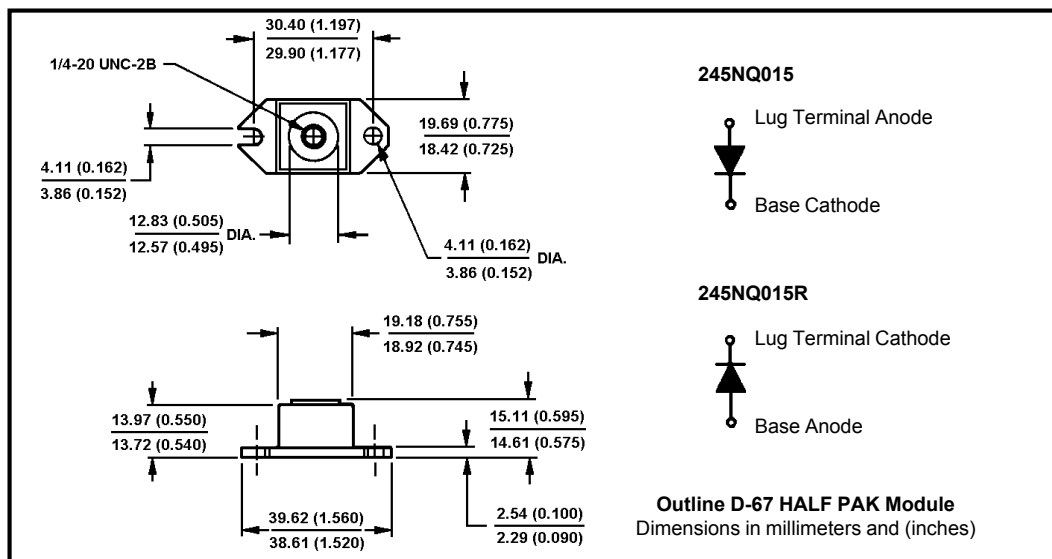

245NQ015

Bulletin PD-2.296 rev. B 02/01

International
IR Rectifier

Voltage Ratings

Part number	245NQ015
V_R Max. DC Reverse Voltage (V)	15
V_{RWM} Max. Working Peak Reverse Voltage (V)	25

Absolute Maximum Ratings

Parameters	245NQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	240	A	50% duty cycle @ $T_C = 70^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	20,000	A	5 μs Sine or 3 μs Rect. pulse
	3000		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	9	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 2\text{ Amps}$, $L = 4.5\text{ mH}$
I_{AR} Repetitive Avalanche Current	2	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 3 \times V_R$ typical

Electrical Specifications

Parameters	245NQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1	0.40	V	@ 240A
	0.51	V	@ 480A
	0.34	V	@ 240A
	0.44	V	@ 480A
I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2	80	mA	$T_J = 25^\circ\text{C}$
	4000	mA	$T_J = 100^\circ\text{C}$
	3560	mA	$T_J = 100^\circ\text{C}$
	2160	mA	$T_J = 100^\circ\text{C}$
C_T Max. Junction Capacitance	15,800	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	5.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters			245NQ	Units	Conditions
T _J	Max. Junction Temperature Range		-55 to 125	°C	
T _{stg}	Max. Storage Temperature Range		-55 to 150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case		0.20	°C/W	DCoperation * See Fig. 4
R _{thCS}	Typical Thermal Resistance, Case to Heatsink		0.15	°C/W	Mounting surface , smooth and greased
wt	Approximate Weight		25.6 (0.9)	g (oz.)	
T	Mounting Torque	Min.	40 (35)	Kg-cm (lbf-in)	Non-lubricated threads
		Max.	58 (50)		
	Terminal Torque	Min.	58 (50)		
		Max.	86 (75)		
Case Style			HALF PAK Module		

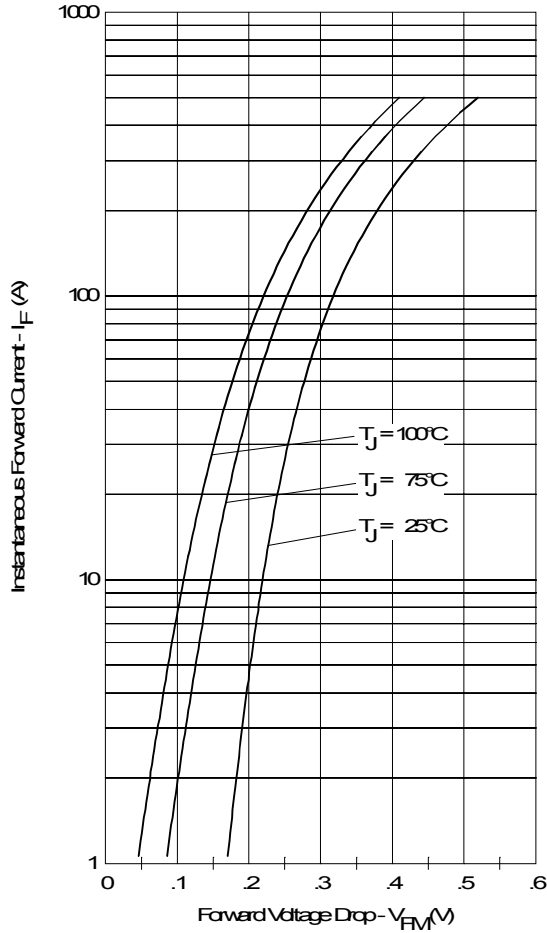


Fig. 1 - Maximum Forward Voltage Drop Characteristics

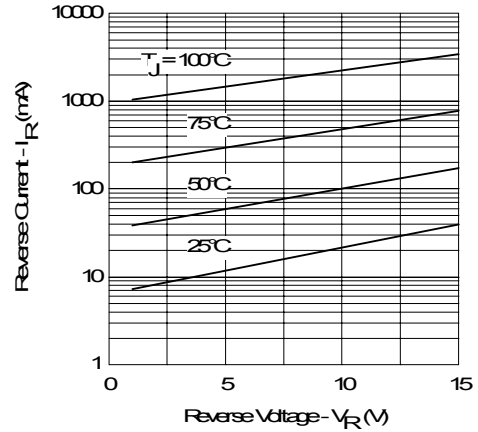


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

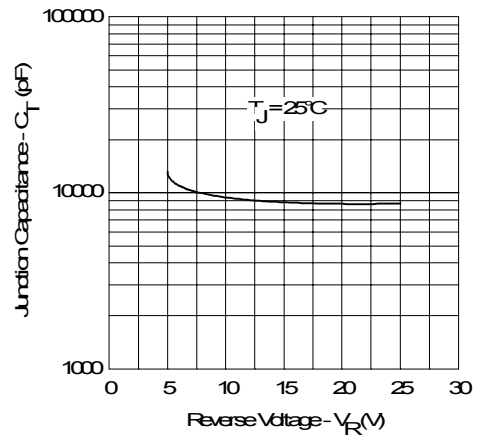


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

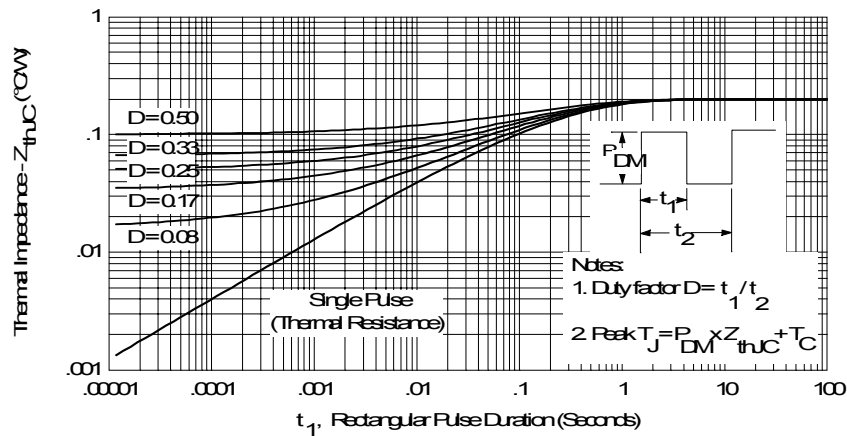


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

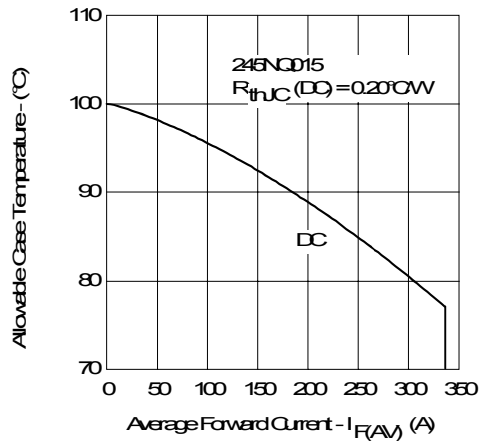


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

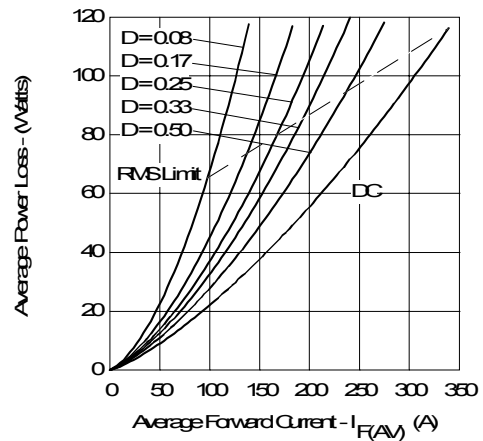


Fig. 6 - Forward Power Loss Characteristics

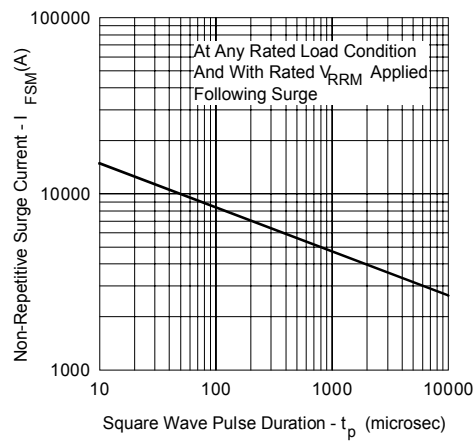


Fig. 7 - Maximum Non-Repetitive Surge Current

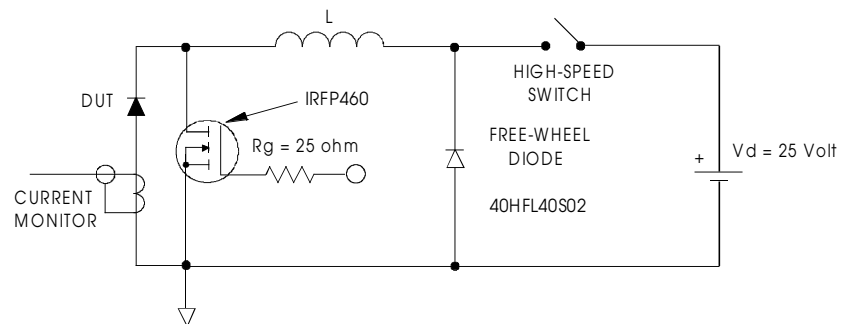


Fig. 8 - Unclamped Inductive Test Circuit